


FAQ: What is the difference between the JVOP-183 and JVOP-183R? (or what is meant by back lit?) by Bob Bonczar



and bypass. It is back lit.

JVOP-183 comes standard on the Z1000 drive

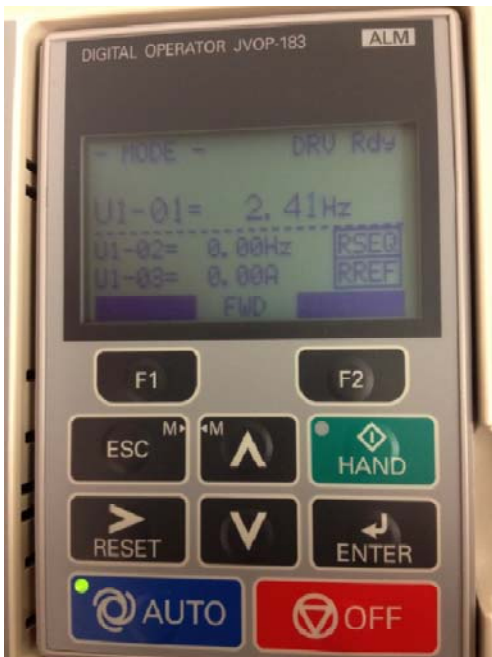

JVOP-183R (R not seen on front but is on back label of key pad) it is not back lit. This is intended for outdoor use to help with glare. It comes with the remote mounting option kit(s) UOP000019 and UOP0000197 (see below*).

The R is not back lit. Nothing to adjust it is just not back lit. Dimensionally everything is the same.

The remote option is used to extend the existing Digital Operator (which is the 183 back lit) just like it says in the note online (see below*). So yes it would show though the option kit bezel. It also says this kit includes: One JVOP-183R. So by this it gives the customer the option to use the existing 183 back lit or the non-back lit 183R.

***The note for the website:**

UL Rated Remote Operator Kit: UOP000019 (Blank Membrane) or UOP000017 (Yaskawa Logo Membrane).

This option is used to extend the existing Digital Operator to the wall of a separately priced, oversized UL Type 1, 3R, 4, 4X, or 12 enclosure (IPX6 environment). This kit includes: One JVOP-183R Digital Operator providing RTC (real time clock), HOA, and outdoor rated LCD display, a faceplate bezel with digital operator brackets and membrane to cover the operator cutout in the enclosure door, a 3-foot cable, a 10-foot cable, and a 1:1 template for cutting the necessary cutouts in the enclosure. Mounting hardware is included. Keypad can be removed after kit installation. Connects to RJ45 port and mounts to enclosure wall.