

*Note: When mounting the drive directly to an enclosure panel wall, be sure to remove the DIN rail attachments first

C/C:	INPUT VOLTAGE (VAC)	WEIGHT Kg (lb)	COOLING FANS
GA51□			
4001□□□	380 TO 480 3-PHASE	0.9 (2.0)	0

□ denotes A-Z

YASKAWA



UNITS MM [IN]

SCALE 1:3

DRWN.	J. MATTAS	11-26-25
CHKD.	J. PIOTROWSKI	12-3-25
TECH.	L. UDDIN	12-9-25
APRV.	M. BAUMGARDNER	12-16-25

TITLE
GA501 DIMENSION DRAWING
FRAME SIZE 2.1
IP20 ENCLOSURE
WITH DIN RAIL ATTACHMENTS


SIZE A PAGE 1 OF 3

DWG.NO.
DD.GA51.FR2.1.IP20.DIN


REV

0

FRONT VIEW

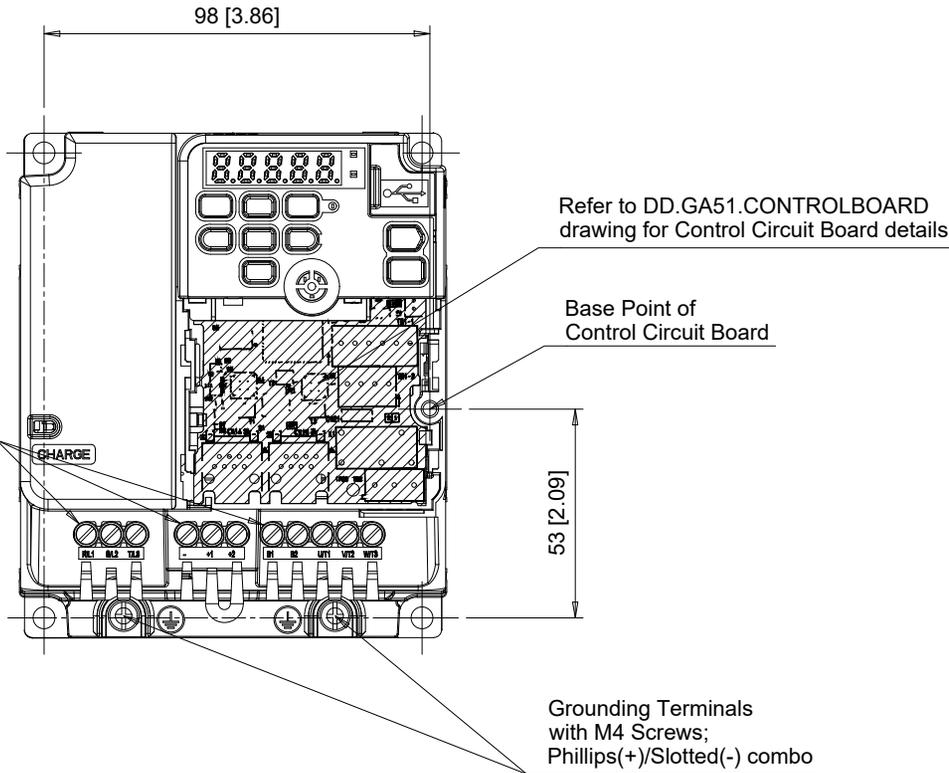

BOTTOM VIEW

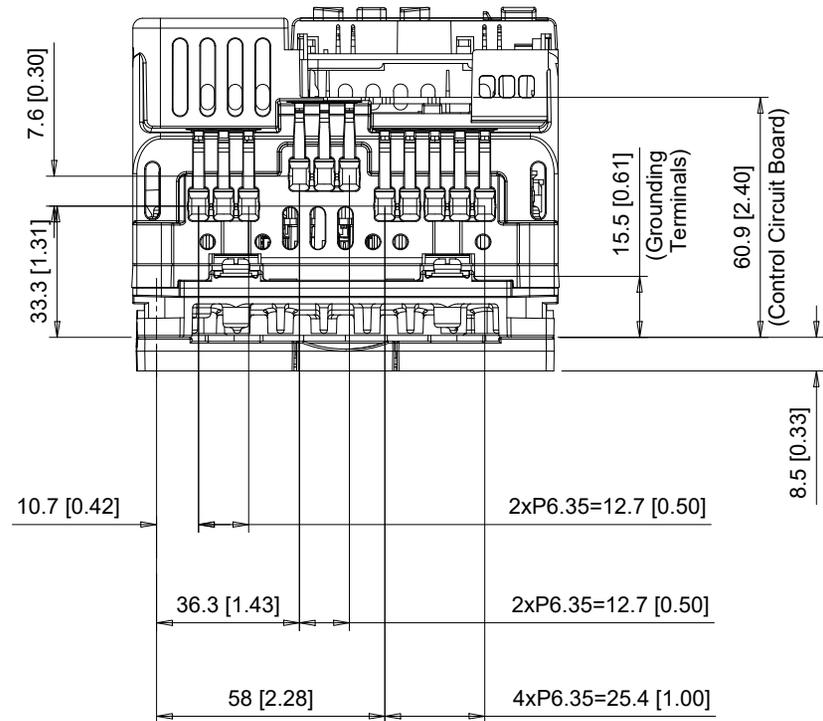

C/C:	TERMINAL SYMBOL	WIRE RANGE AWG (mm ²)	TERMINAL SCREW	CLAMPING TORQUE N.m. (lb.in.)
GA51□	R/L1, S/L2, T/L3	14 - 10 (2.5 - 6)	M3	0.6 - 0.8 (5 - 7)
	U/T1, V/T2, W/T3	14 - 10 (2.5 - 6)	M3	0.6 - 0.8 (5 - 7)
4001□□□	-, +1, +2	14 - 10 (2.5 - 6)	M3	0.6 - 0.8 (5 - 7)
	B1, B2	14 - 10 (2.5 - 6)	M3	0.6 - 0.8 (5 - 7)
	⊕	14 - 10 (2.5 - 6)	M4	1.2 - 1.5 (11 - 13)

□ Denotes A-Z

Note: Refer to applicable codes and standards for proper wire type and size.

YASKAWA

UNITS MM [IN]
SCALE 1:2


DRWN. J. MATTAS 11-26-25
CHKD. J. PIOTROWSKI 12-3-25
TECH. L. UDDIN 12-9-25
APRV. M. BAUMGARDNER 12-16-25

TITLE
GA501 DIMENSION DRAWING
FRAME SIZE 2.1
IP20 ENCLOSURE
WITH DIN RAIL ATTACHMENTS

SIZE A PAGE 2 OF 3
DWG.NO. DD.GA51.FR2.1.IP20.DIN


REV 0

Minimum Installation Clearances

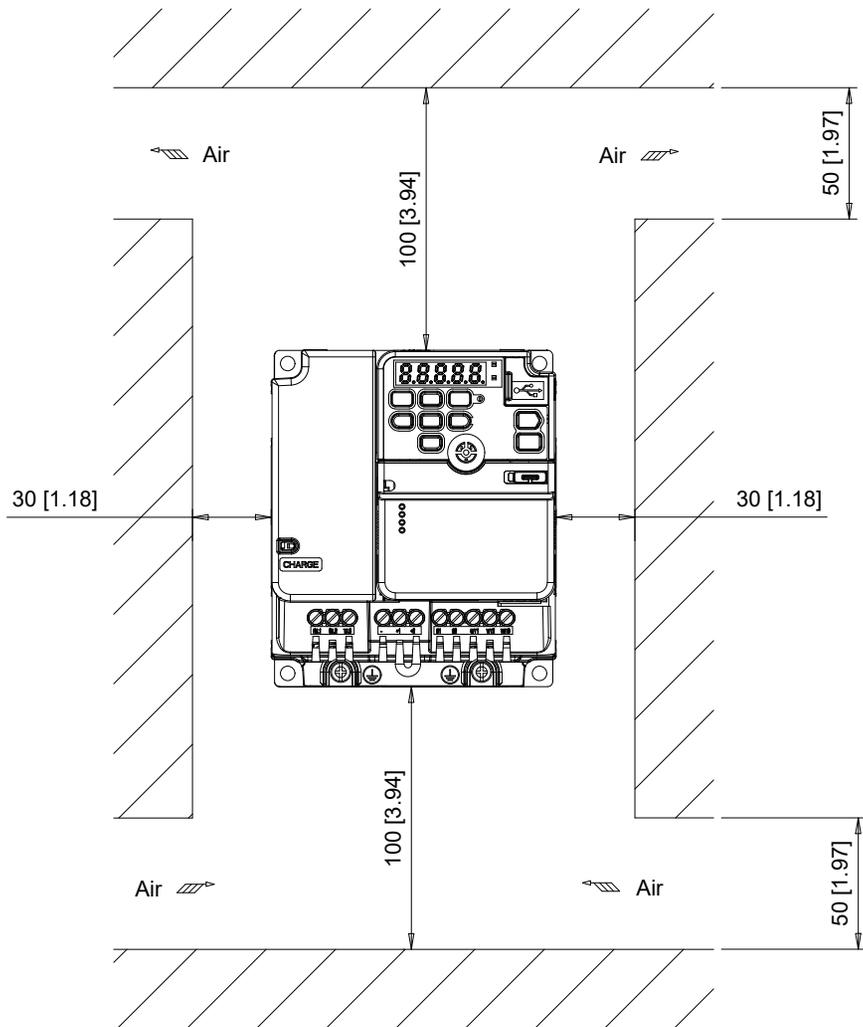

Note:
For alternate mounting configurations, consult manual.

Panel Cutout
For External Heatsink Mounting Configuration

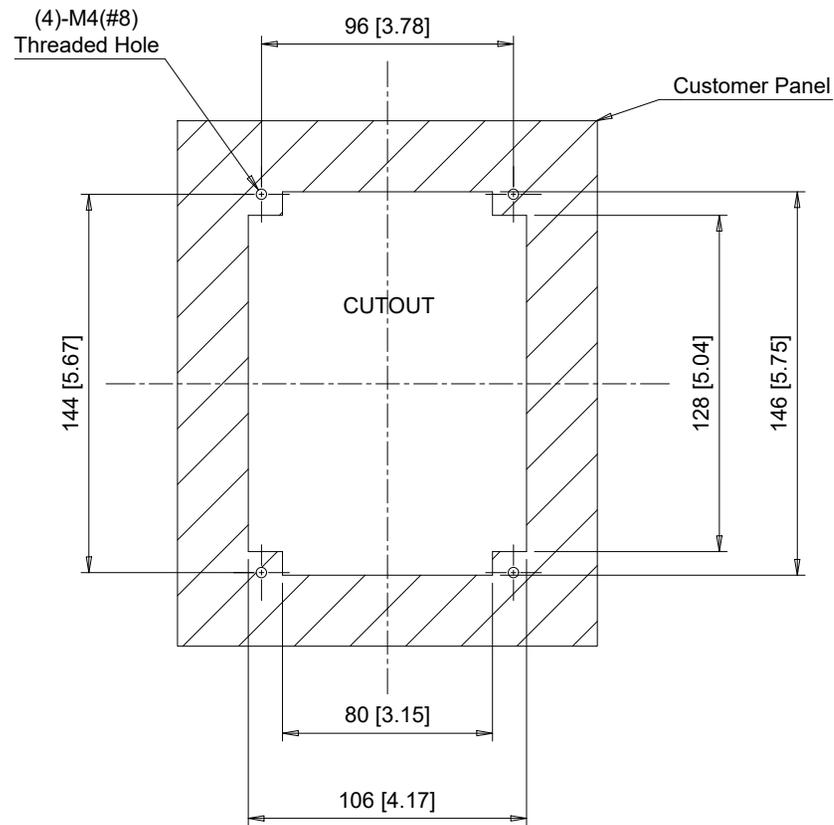

Notes:
Exposed heatsink minimum clearance = 13.5 [0.53].
When mounting the drive with an external heatsink mounting bracket,
be sure to remove the DIN rail attachments first.
Refer to external heatsink instructions document for additional details.

YASKAWA



UNITS MM [IN]
SCALE 1:3

DRWN. J. MATTAS 11-26-25
CHKD. J. PIOTROWSKI 12-3-25
TECH. L. UDDIN 12-9-25
APRV. M. BAUMGARDNER 12-16-25

TITLE
GA501 DIMENSION DRAWING
FRAME SIZE 2.1
IP20 ENCLOSURE
WITH DIN RAIL ATTACHMENTS

SIZE A PAGE 3 OF 3
DWG.NO. DD.GA51.FR2.1.IP20.DIN

REV
0