

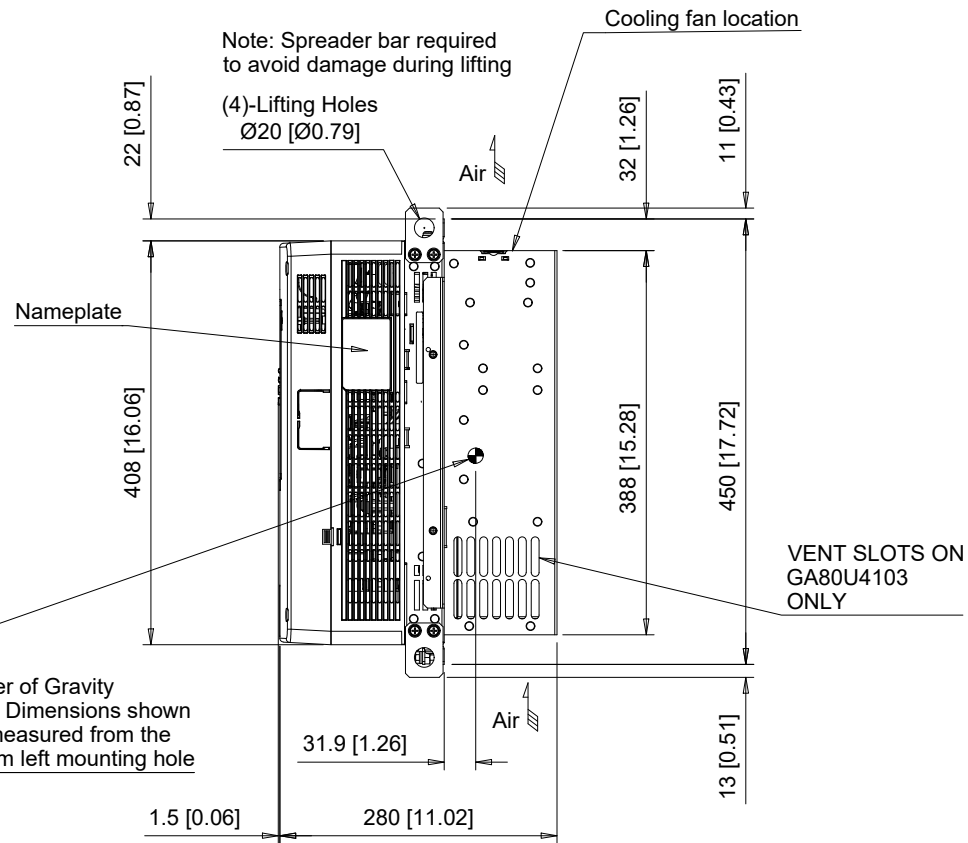
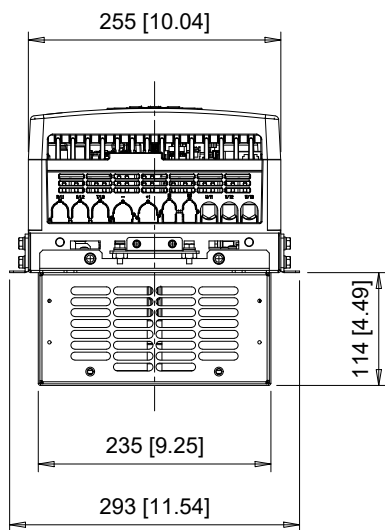


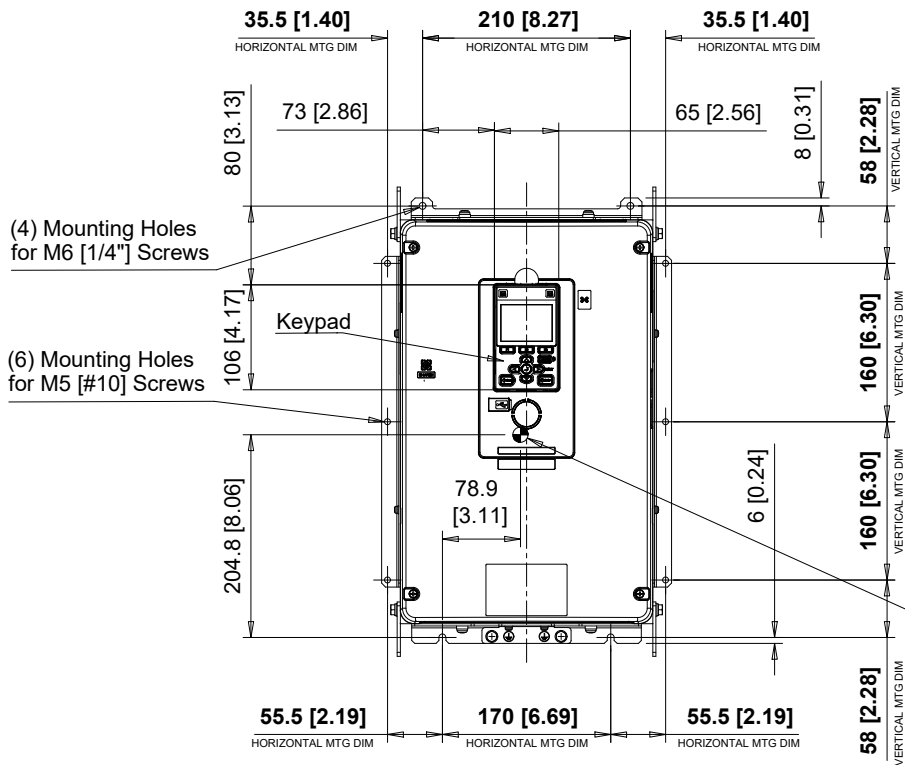

C/C: GA80□	INPUT VOLTAGE 3-PHASE (VAC)	WEIGHT Kg (lb)	COOLING FANS
2138□□□	200 TO 240	25 (55.0)	2
4089□□□	380 TO 480	22 (48.5)	2
4103□□□		27 (59.4)	2

□ denotes A-Z

YASKAWA



UNITS MM [IN]
SCALE 1:8

DRWN. J. MATTAS 4-8-19
CHKD. J. PIOTROWSKI 5-6-19
TECH. L. UDDIN 5-20-19
APRV. J. CAIRO 6-13-19



TITLE
GA800 DIMENSION DRAWING
FRAME SIZE 6
BACKSIDE TYPE 12 ENCLOSURE

SIZE A
PAGE 1 OF 4
DWG.NO.
DD.GA80.FR6.FLNG

REV
2


2 ADD MTG DIMS P1
1 REV'D MOUNTING BKTS P2,3
0 INITIAL RELEASE


Terminal and Wiring Information for GA80□4089

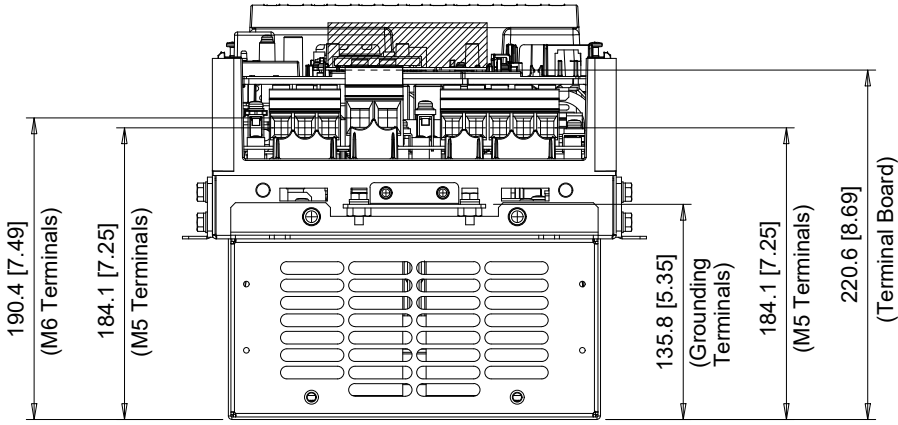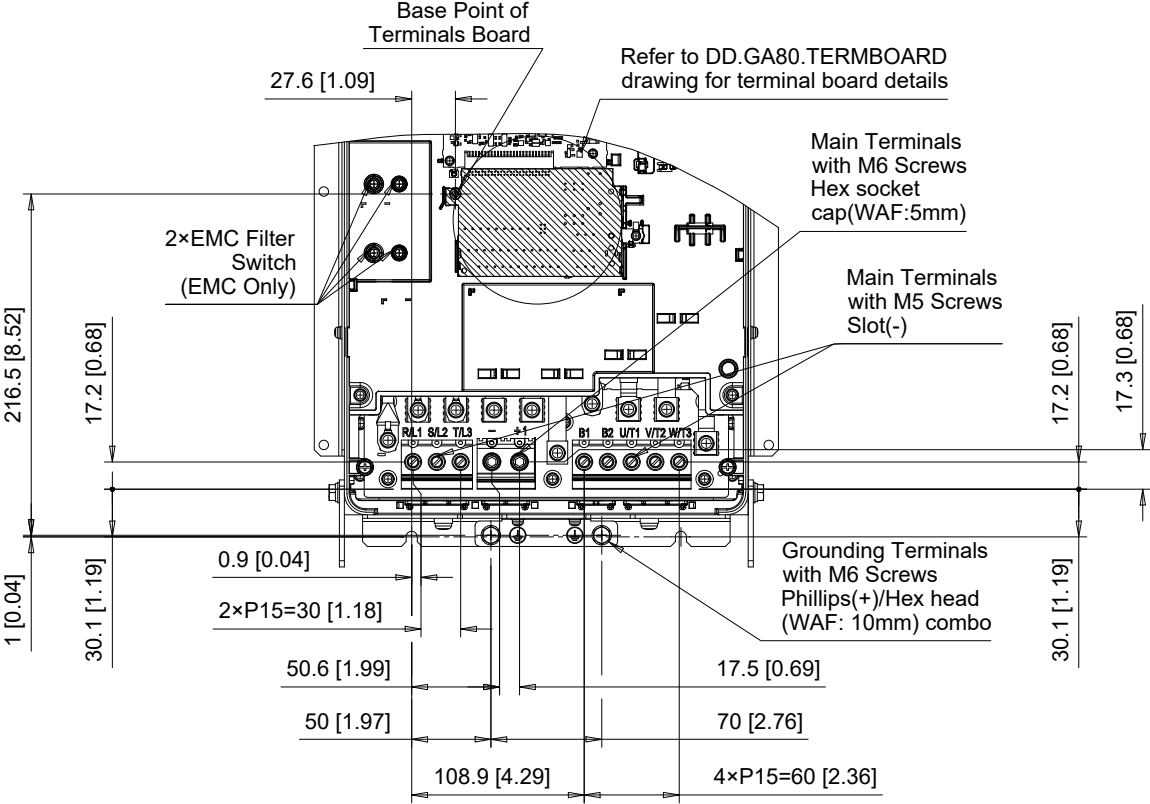

C/C: GA80□	TERMINAL SYMBOL	WIRE RANGE AWG (mm ²)	TERMINAL SCREW	CLAMPING TORQUE N.m. (lb.in.)
4089□□□	R/L1, S/L2, T/L3	8 - 2 (10 - 35)	M5	4.1 - 4.5 (36 - 40)
	U/T1, V/T2, W/T3	8 - 2 (10 - 35)	M5	4.1 - 4.5 (36 - 40)
	- , +1	14 - 2/0 (2.5 - 70)	M6	5.0 - 5.5 (45 - 49)
	B1, B2	8 - 2 (10 - 35)	M5	4.1 - 4.5 (36 - 40)
	⊕	6 - 4 (16 - 25)	M6	5.4 - 6.0 (47.8 - 53.1)

□ Denotes A-Z
Note: Refer to applicable codes and standards for proper wire type and size.

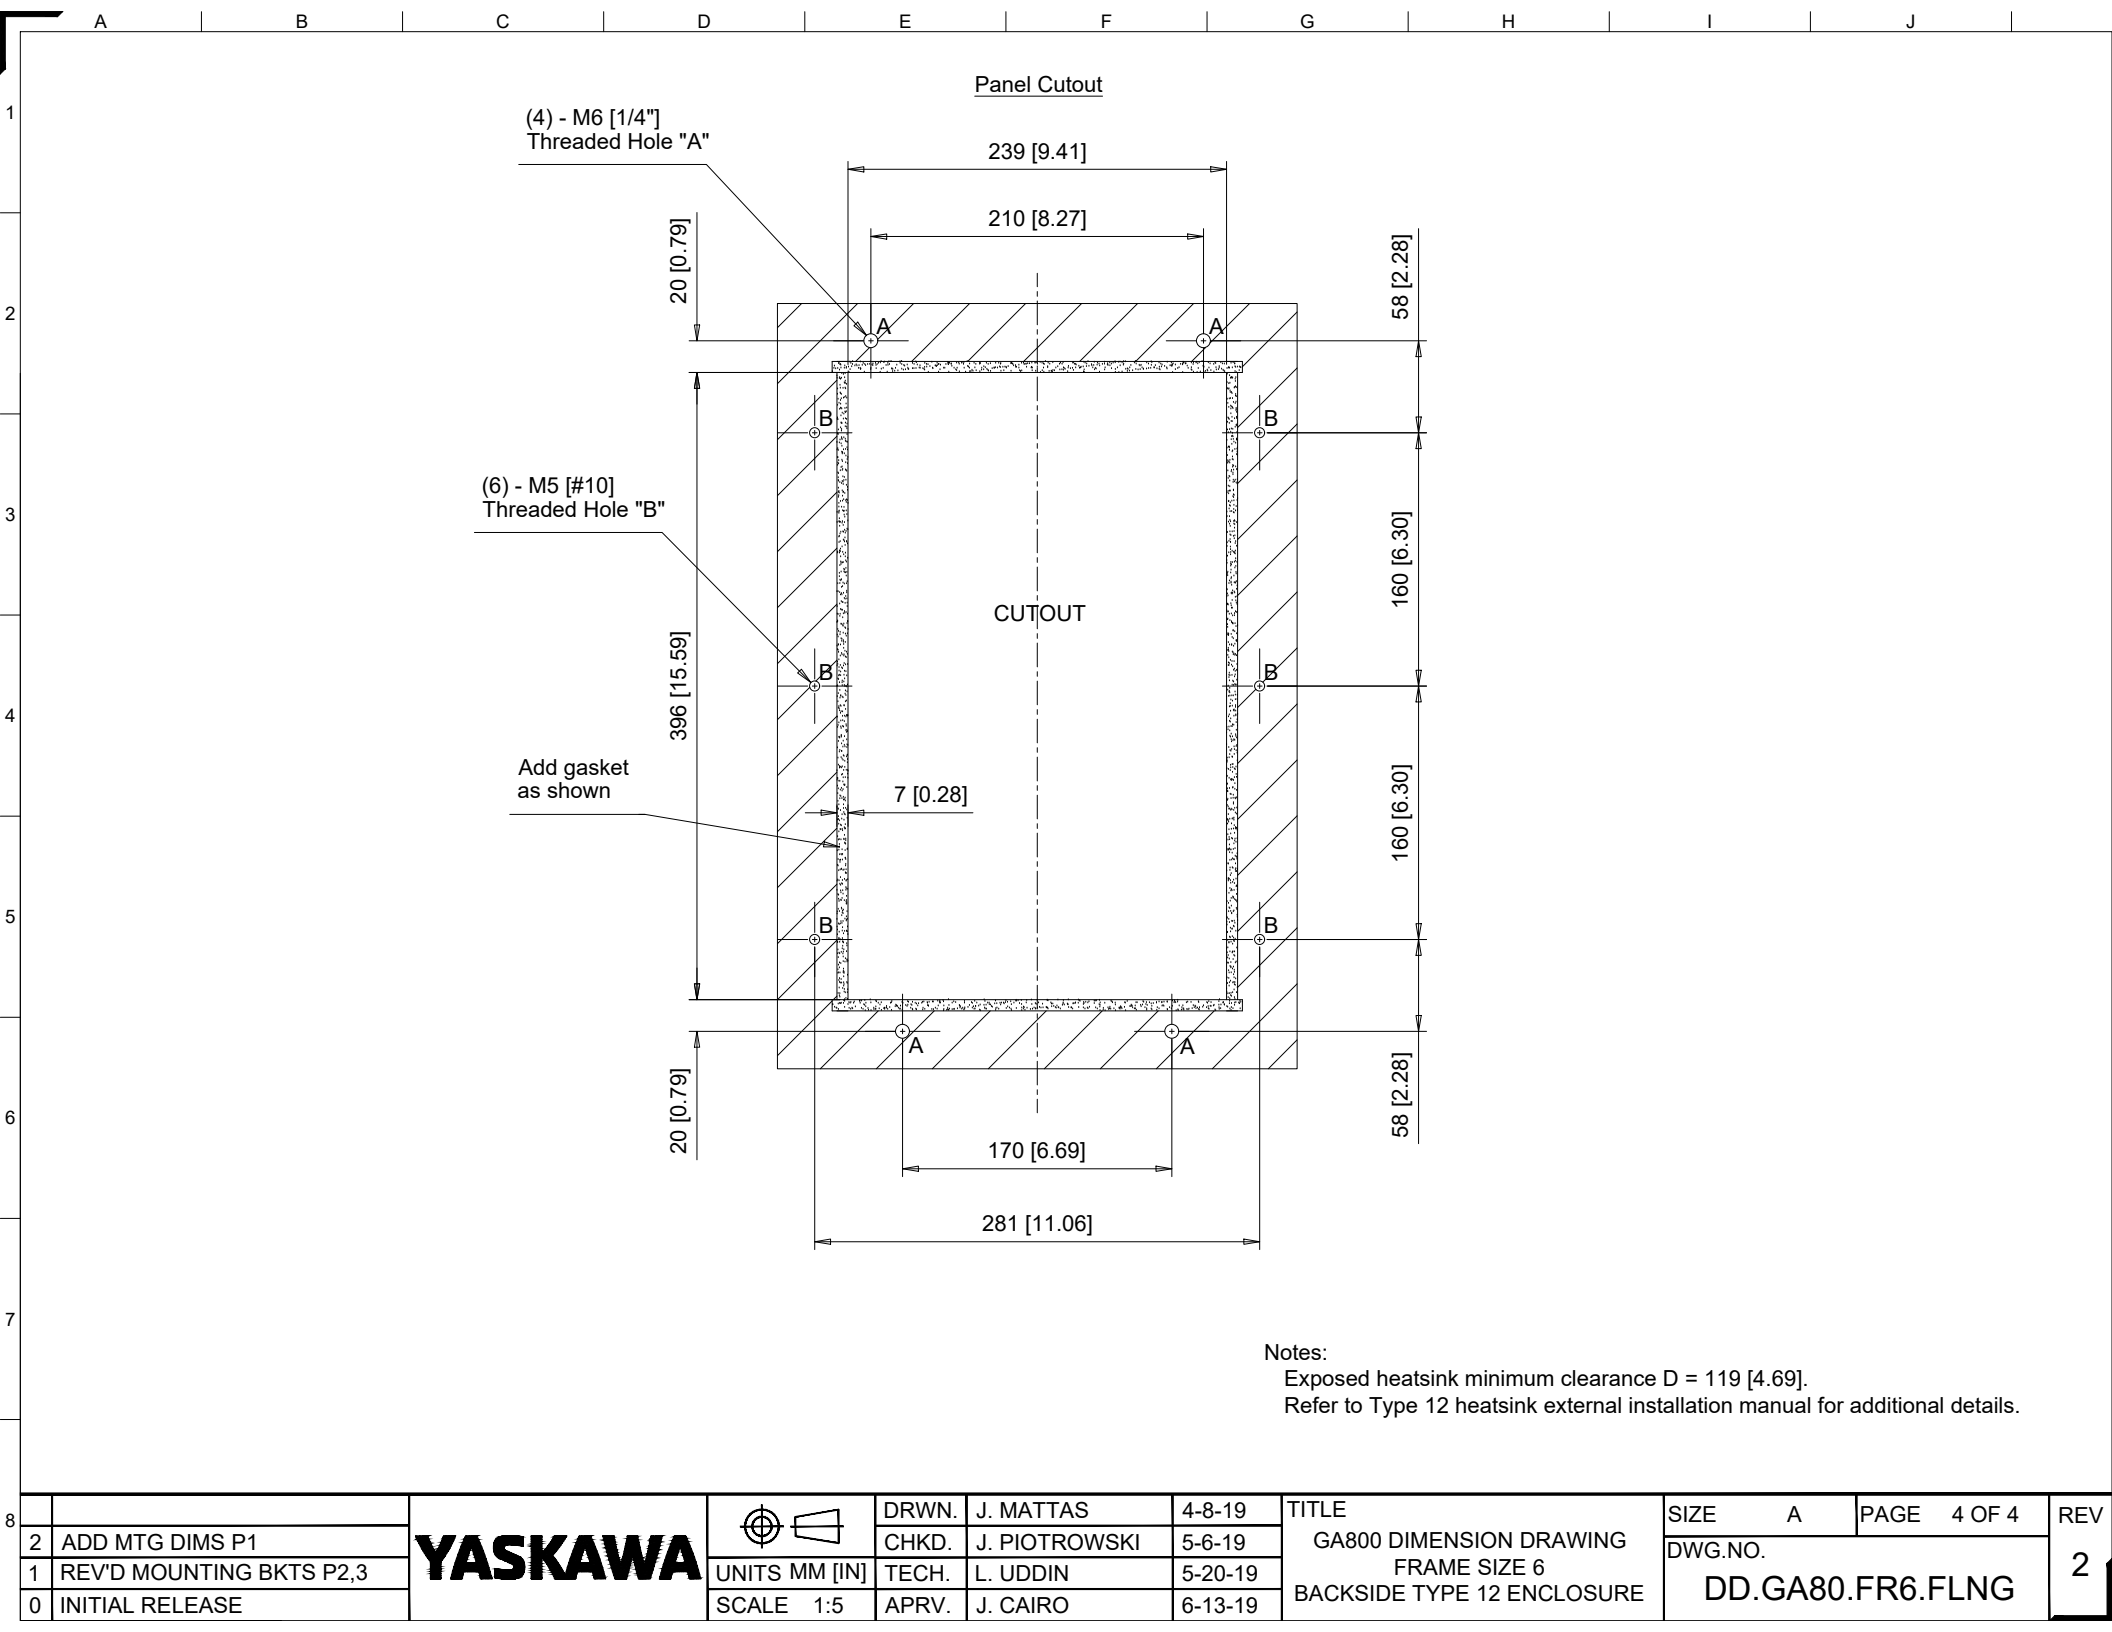

8		YASKAWA		DRWN.	J. MATTAS	4-8-19	TITLE GA800 DIMENSION DRAWING FRAME SIZE 6 BACKSIDE TYPE 12 ENCLOSURE	SIZE	A	PAGE	4 OF 4	REV 2		
	2			ADD MTG DIMS P1	CHKD.	J. PIOTROWSKI		5-6-19	DWG.NO. DD.GA80.FR6.FLNG					
	1			REV'D MOUNTING BKTS P2,3	TECH.	L. UDDIN		5-20-19						
	0			INITIAL RELEASE	SCALE	1:5		APRV.						J. CAIRO
				UNITS	MM [IN]									