
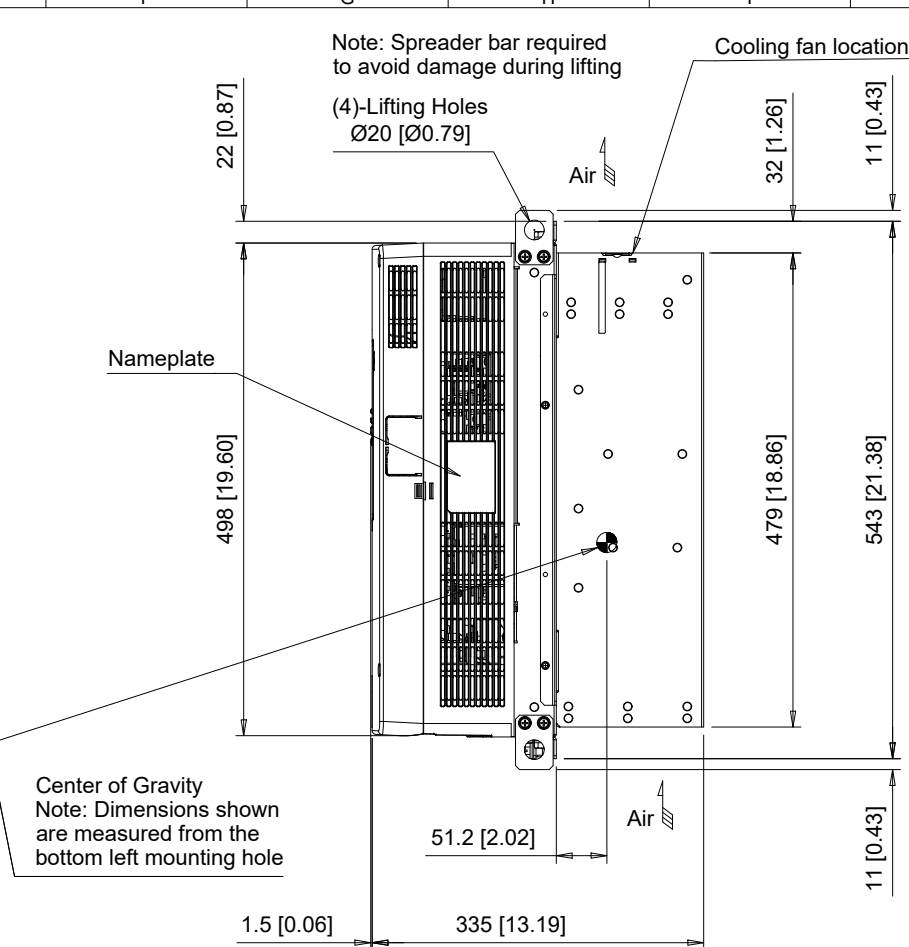


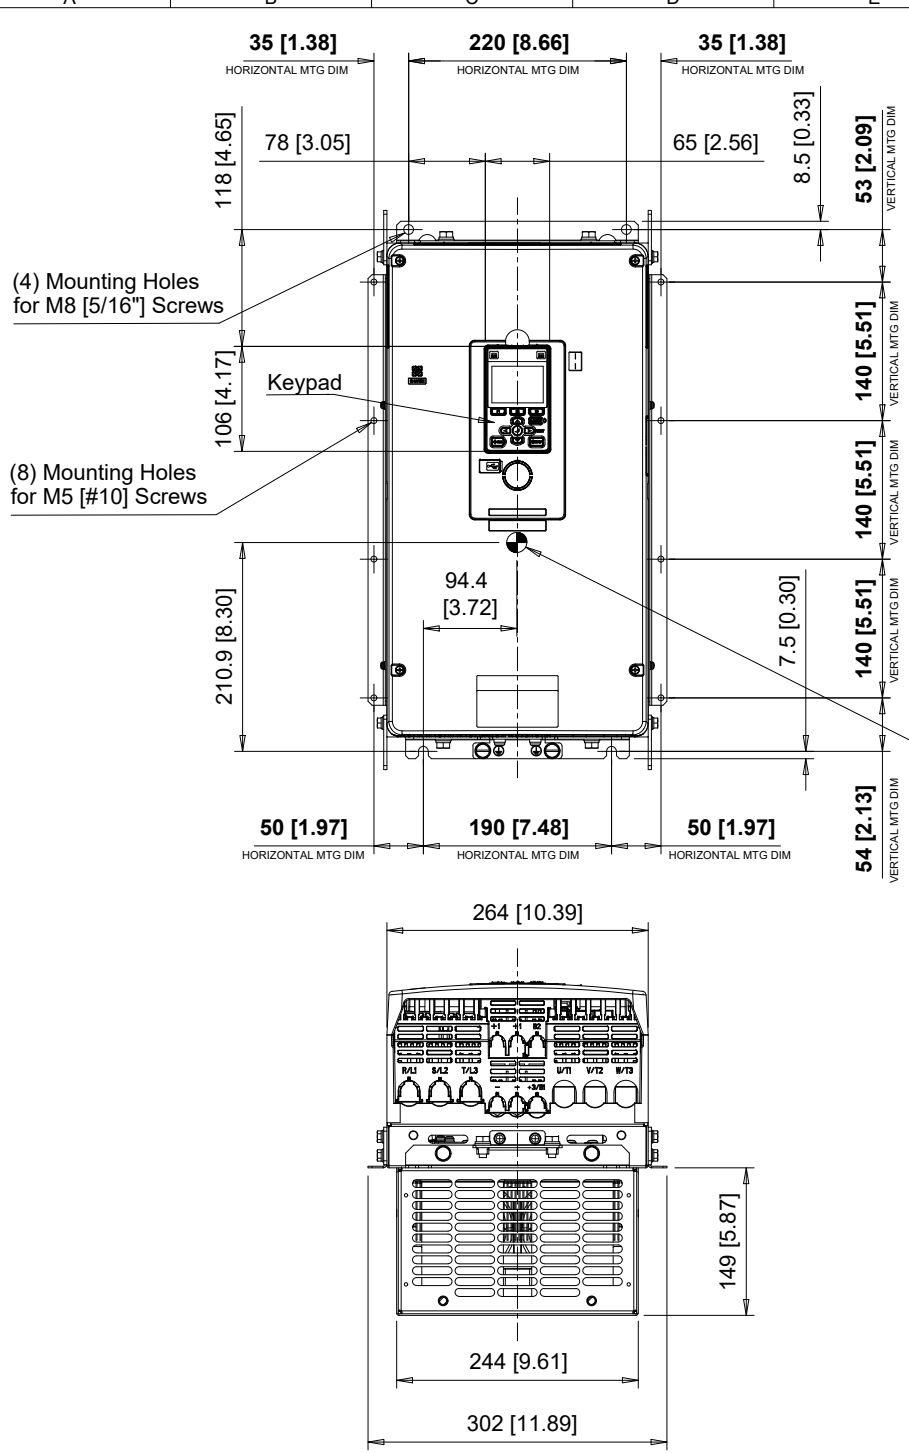

Center of Gravity
Note: Dimensions shown are measured from the bottom left mounting hole

C/C: GA80□	INPUT VOLTAGE 3-PHASE (VAC)	WEIGHT Kg (lb)	COOLING FANS
2169□□□	200 TO 240	39 (85.8)	2
2211□□□		40 (88.0)	2
4140□□□	380 TO 480	41 (90.2)	2
4168□□□		42 (92.4)	2

□ denotes A-Z

2	ADD MTG DIMS P1
1	REVISED MOUNTING BKTS P2
0	INITIAL RELEASE

YASKAWA


UNITS MM [IN]
SCALE 1:8

DRWN.	J. MATTAS	4-8-19
CHKD.	J. PIOTROWSKI	5-6-19
TECH.	L. UDDIN	5-20-19
APRV.	J. CAIRO	6-13-19

TITLE
GA800 DIMENSION DRAWING
FRAME SIZE 7
BACKSIDE TYPE 12 ENCLOSURE

SIZE A	PAGE 1 OF 3
DWG.NO.	DD.GA80.FR7.FLNG

REV
2

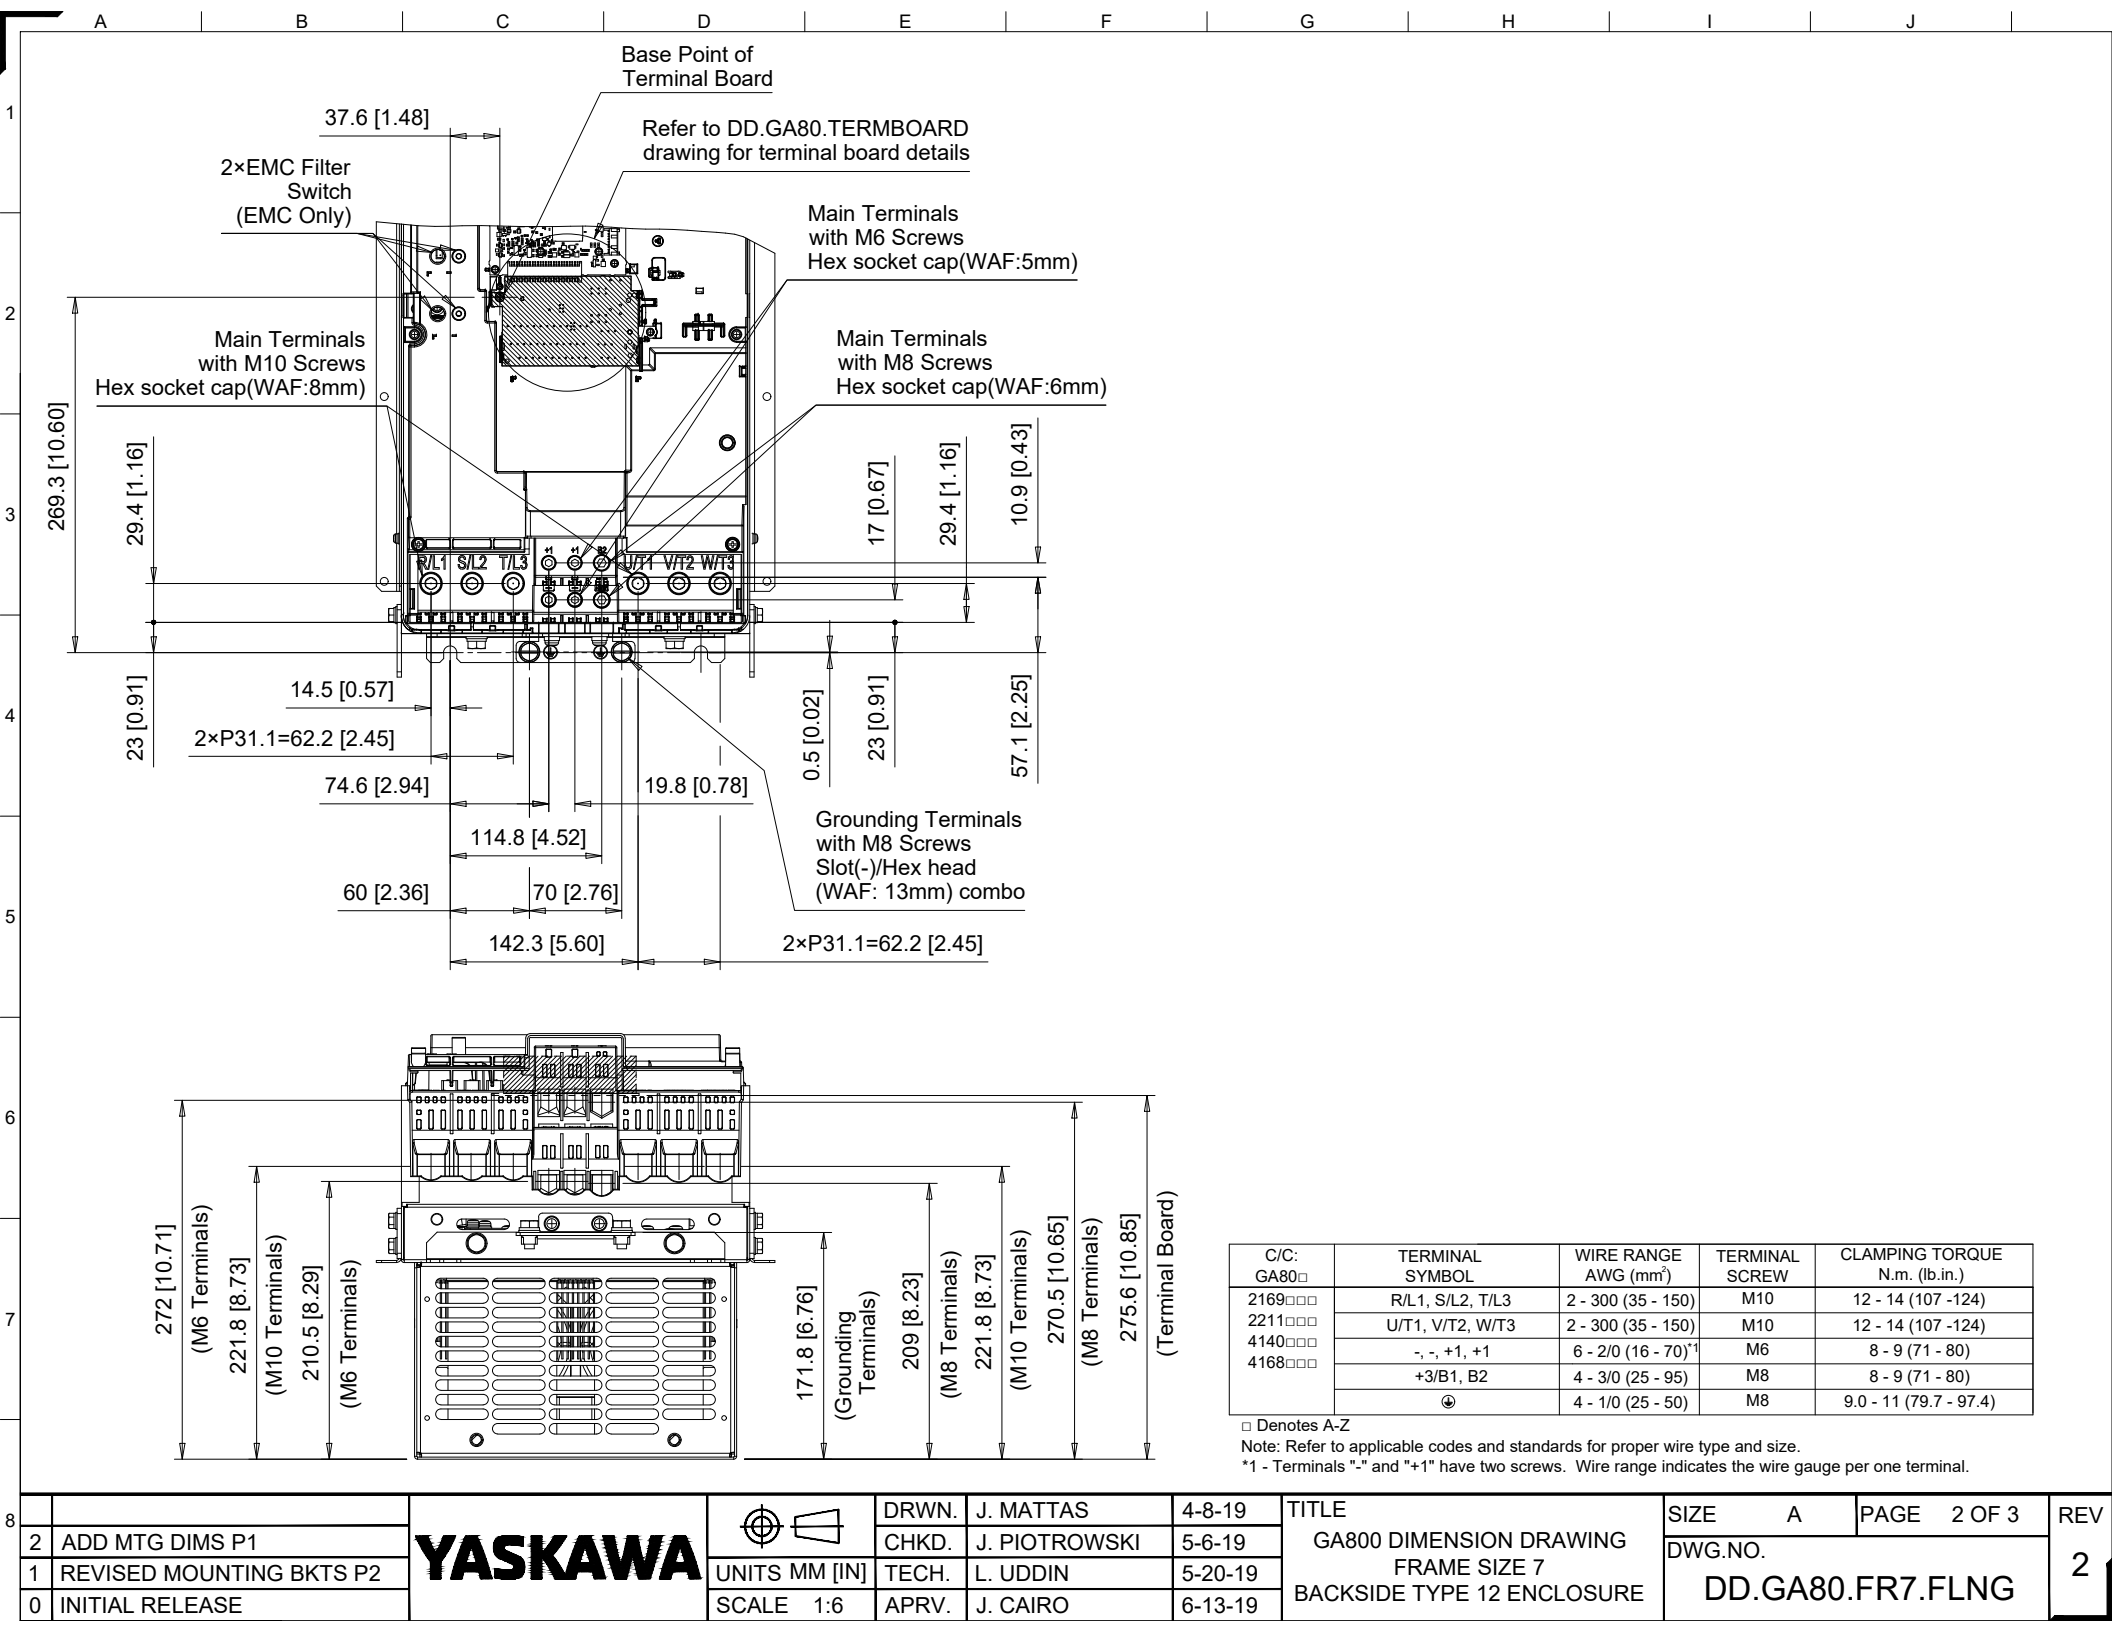

2	ADD MTG DIMS P1
1	REVISED MOUNTING BKTS P2
0	INITIAL RELEASE

YASKAWA

UNITS MM [IN]
SCALE 1:6


DRWN.	J. MATTAS	4-8-19
CHKD.	J. PIOTROWSKI	5-6-19
TECH.	L. UDDIN	5-20-19
APRV.	J. CAIRO	6-13-19

TITLE
GA800 DIMENSION DRAWING
FRAME SIZE 7
BACKSIDE TYPE 12 ENCLOSURE

SIZE	A	PAGE	2 OF 3
DWG.NO.	DD.GA80.FR7.FLNG		

REV
2

Panel Cutout

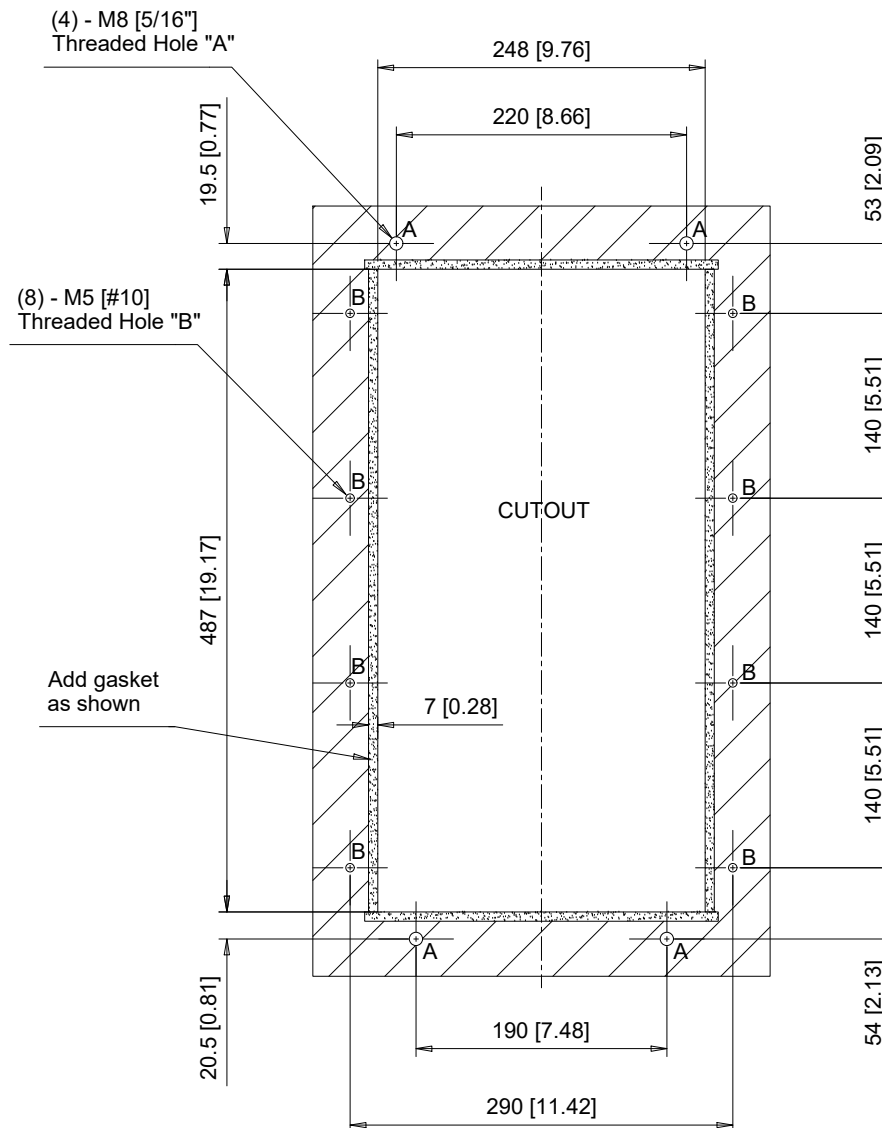

Notes:

Exposed heatsink minimum clearance D = 154 [6.06].

Refer to Type 12 heatsink external installation manual for additional details.

8		YASKAWA		DRWN.	J. MATTAS	4-8-19	TITLE GA800 DIMENSION DRAWING FRAME SIZE 7 BACKSIDE TYPE 12 ENCLOSURE	SIZE	A	PAGE	3 OF 3	REV 2
2	ADD MTG DIMS P1			CHKD.	J. PIOTROWSKI	5-6-19		DWG.NO.				
1	REVISED MOUNTING BKTS P2			TECH.	L. UDDIN	5-20-19						
0	INITIAL RELEASE			SCALE	1:6	APRV.		J. CAIRO	6-13-19	DD.GA80.FR7.FLNG		