



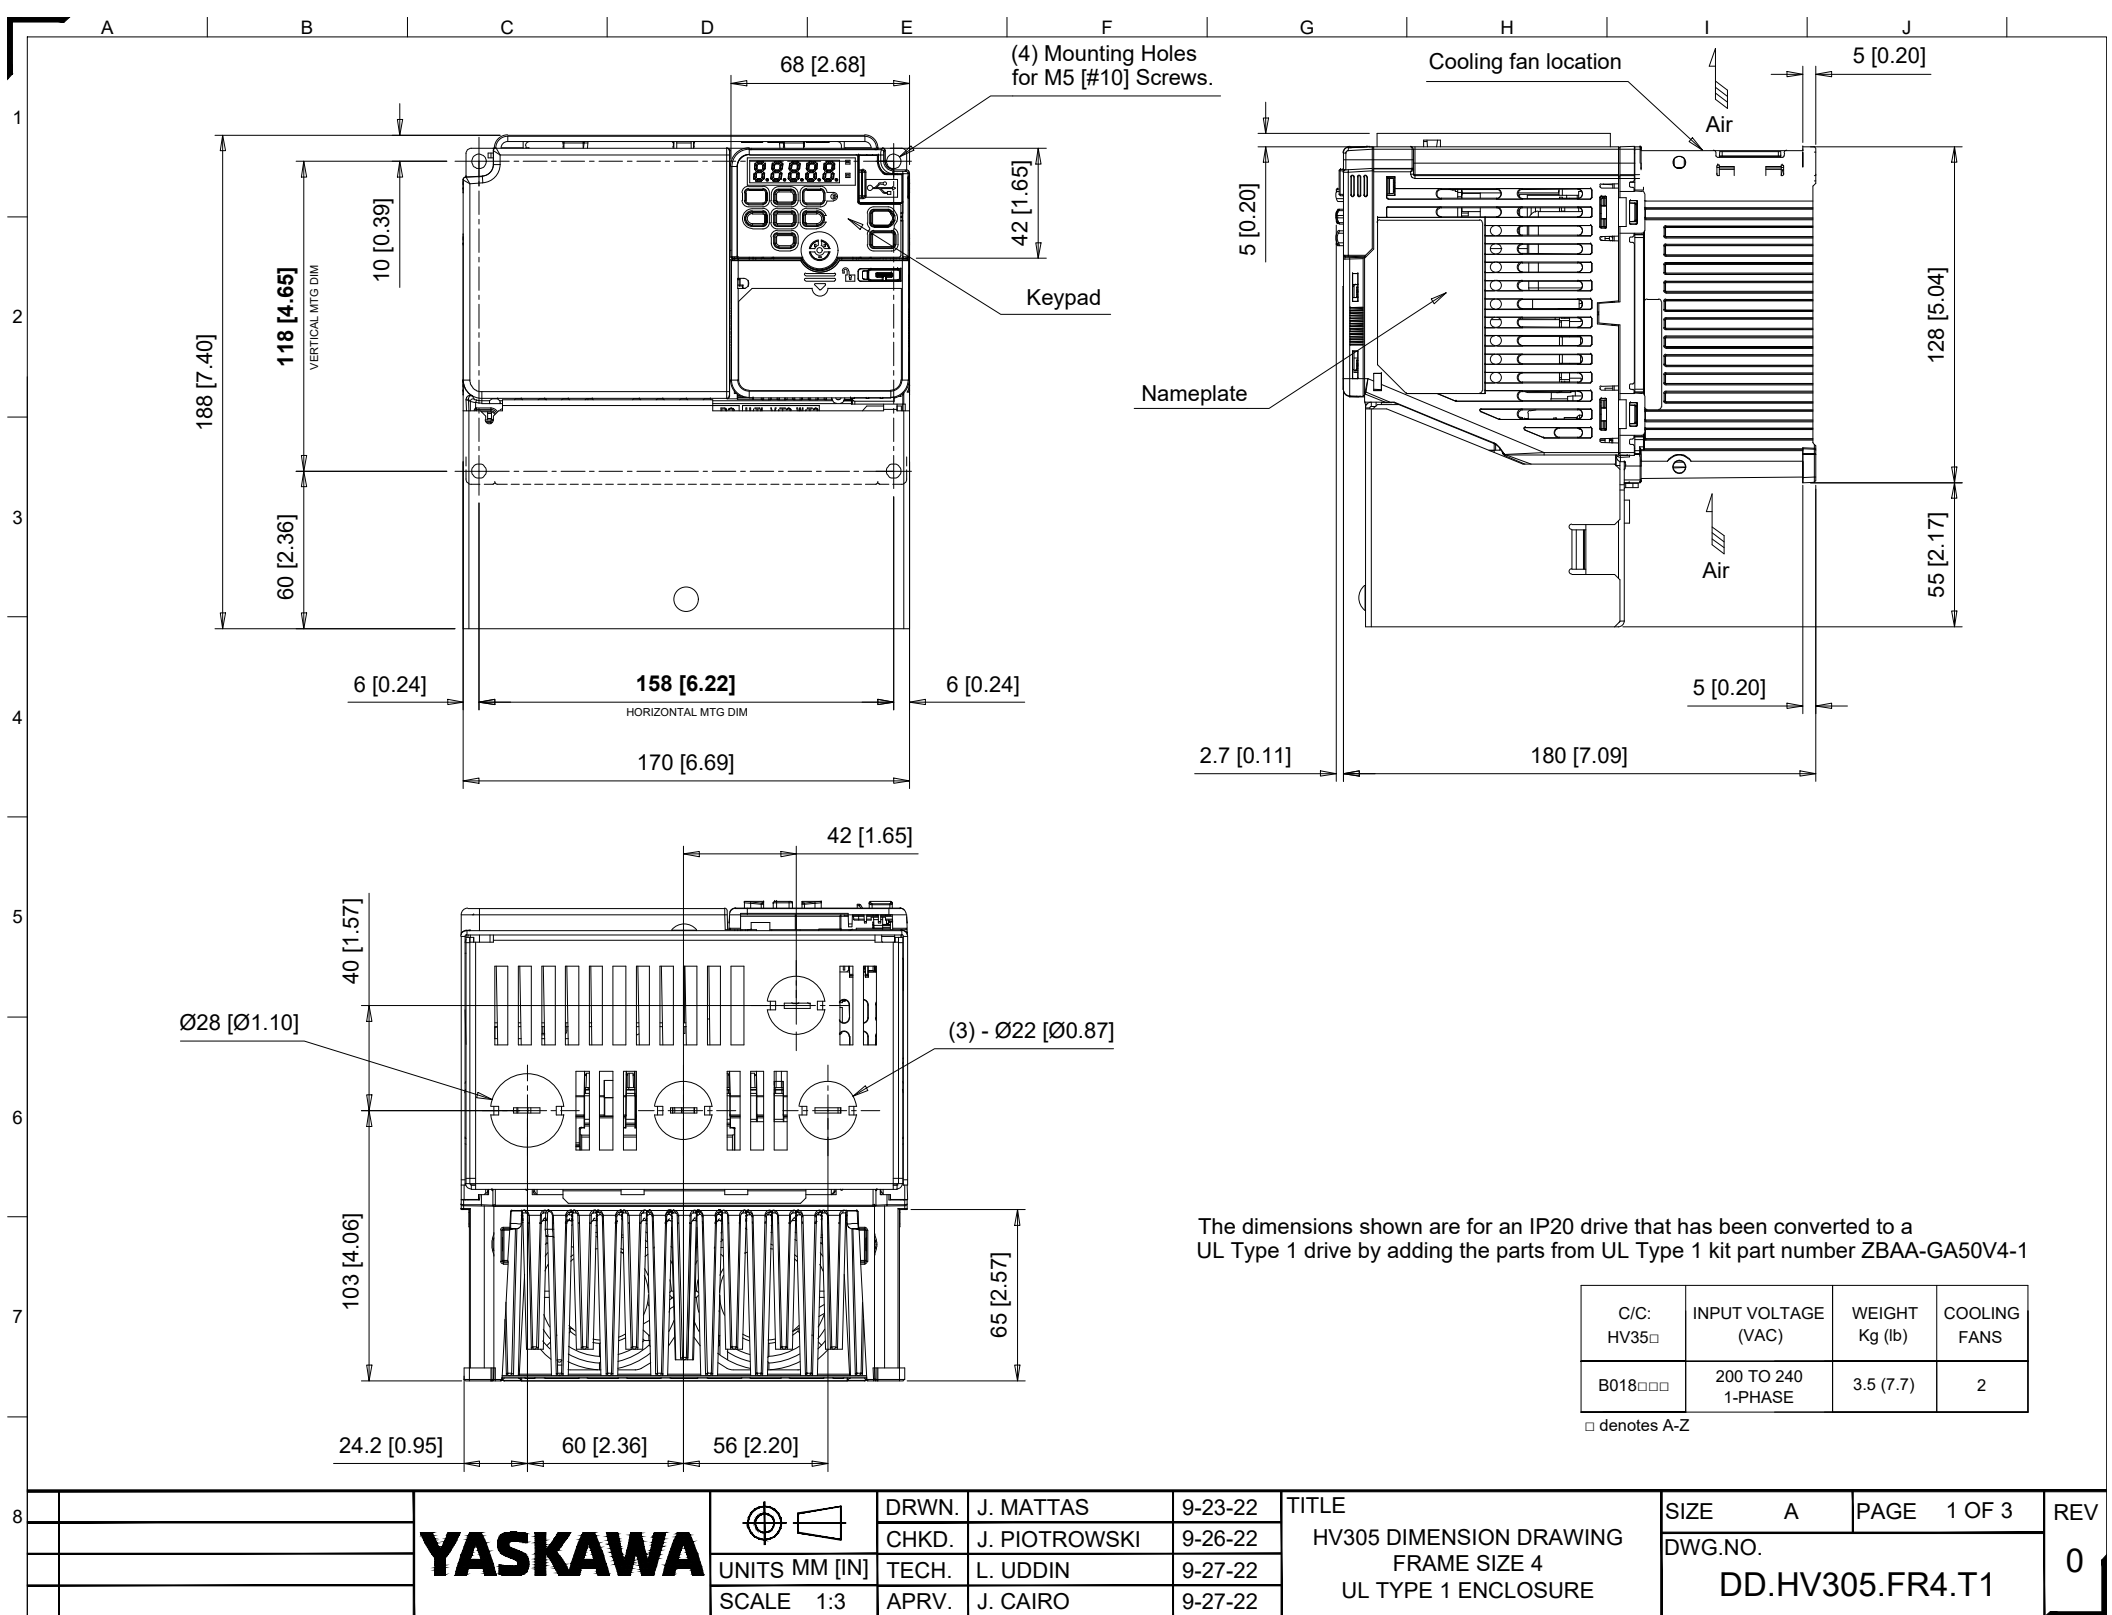

YASKAWA




DRWN. J. MATTAS 9-23-22
CHKD. J. PIOTROWSKI 9-26-22
TECH. L. UDDIN 9-27-22
APRV. J. CAIRO 9-27-22

TITLE
HV305 DIMENSION DRAWING
FRAME SIZE 4
UL TYPE 1 ENCLOSURE


SIZE A
PAGE 1 OF 3
DWG.NO.
DD.HV305.FR4.T1

REV
0

FRONT VIEW

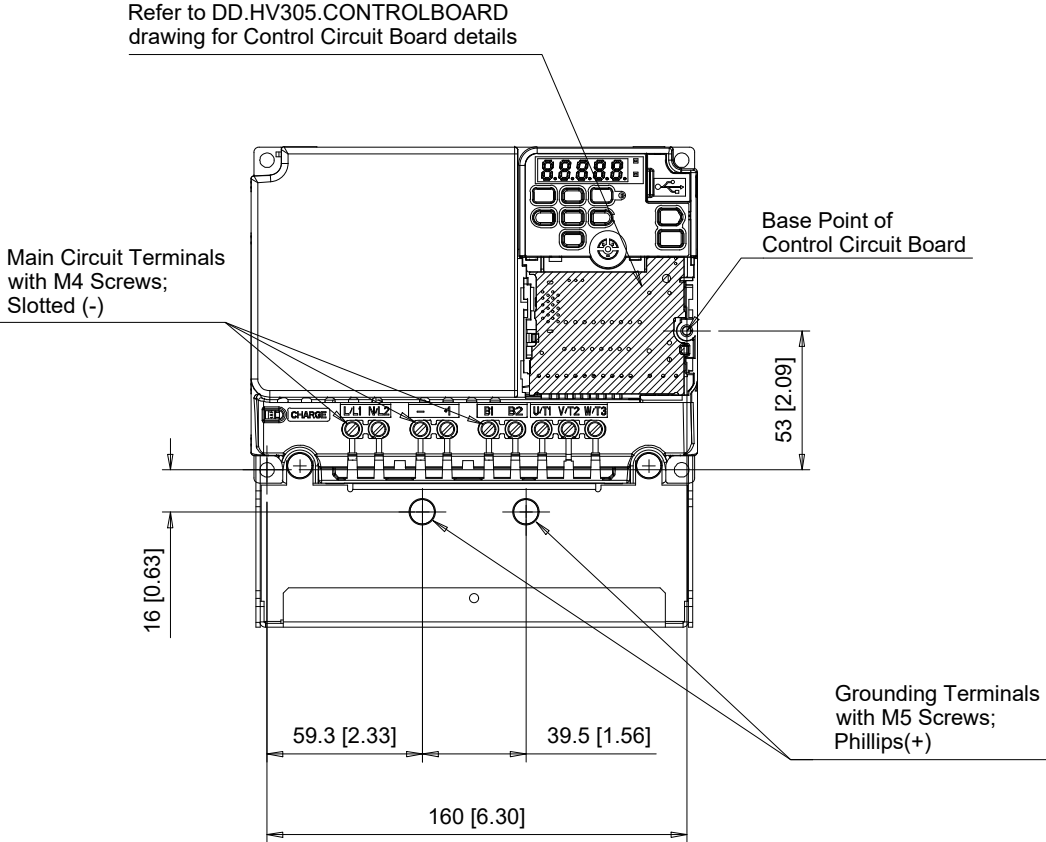

BOTTOM VIEW

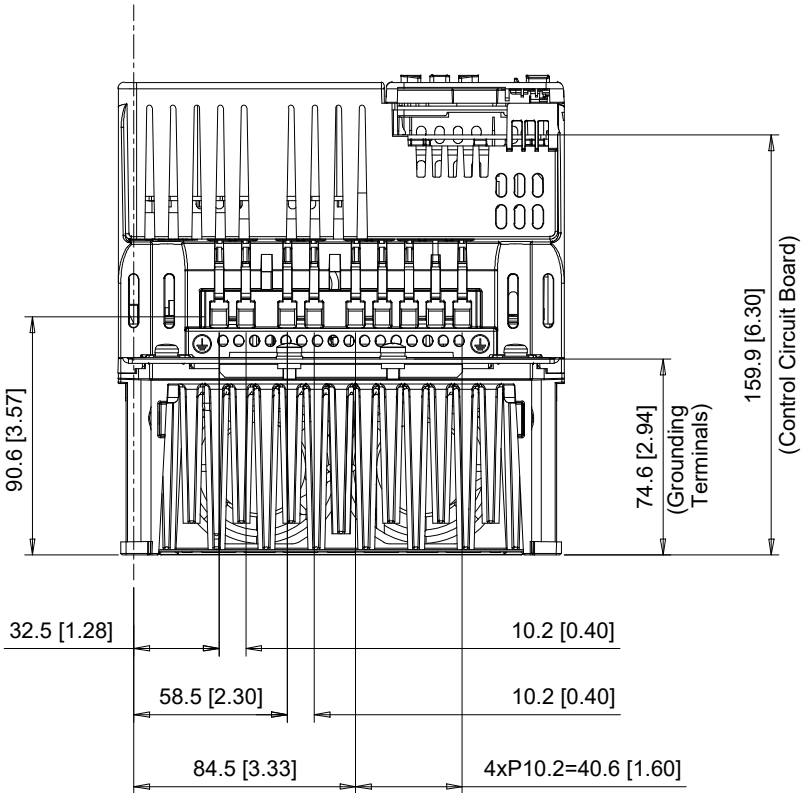

C/C: HV35□	TERMINAL SYMBOL	WIRE RANGE AWG (mm²)	TERMINAL SCREW	CLAMPING TORQUE N.m. (lb.in.)
B018□□□	L/L1, N/L2	14 - 6 (2.5 - 16)	M4	1.7 (15)
	U/T1, V/T2, W/T3	14 - 6 (2.5 - 16)	M4	1.7 (15)
	- , +1	14 - 6 (2.5 - 16)	M4	1.7 (15)
	B1, B2	14 - 6 (2.5 - 16)	M4	1.7 (15)
	⊕	12 - 8 (4 - 10)	M5	2.0 - 2.5 (18 - 22)

□ Denotes A-Z
Note: Refer to applicable codes and standards for proper wire type and size.

YASKAWA

UNITS MM [IN]
SCALE 1:3


DRWN. J. MATTAS 9-23-22
CHKD. J. PIOTROWSKI 9-26-22
TECH. L. UDDIN 9-27-22
APRV. J. CAIRO 9-27-22

TITLE
HV305 DIMENSION DRAWING
FRAME SIZE 4
UL TYPE 1 ENCLOSURE

SIZE A
PAGE 2 OF 3
DWG.NO.
DD.HV305.FR4.T1


REV
0

Minimum Installation Clearances

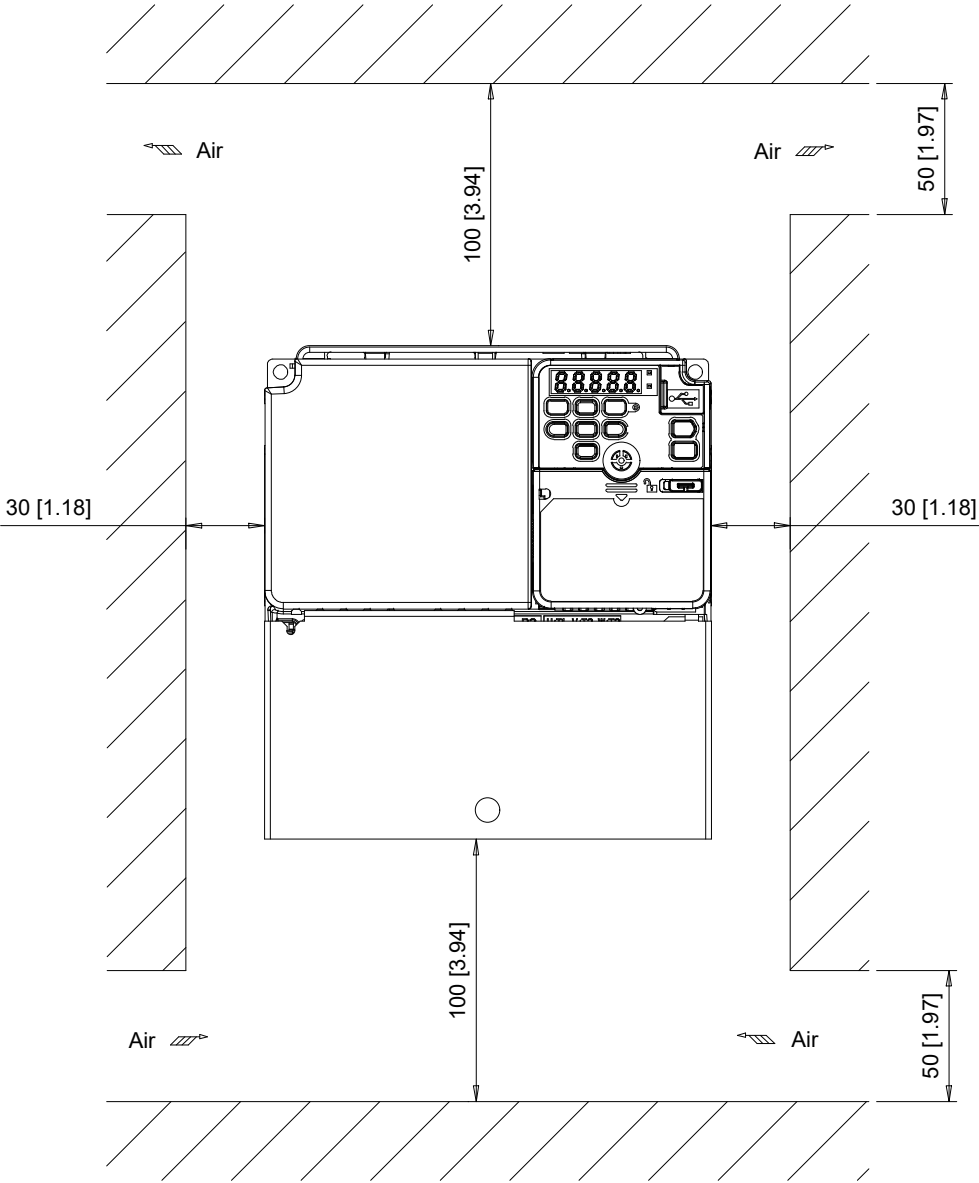

Note:
For alternate mounting configurations, consult manual.

YASKAWA



UNITS MM [IN]
SCALE 1:3

DRWN.	J. MATTAS	9-23-22
CHKD.	J. PIOTROWSKI	9-26-22
TECH.	L. UDDIN	9-27-22
APRV.	J. CAIRO	9-27-22

TITLE
HV305 DIMENSION DRAWING FRAME SIZE 4 UL TYPE 1 ENCLOSURE

SIZE A	PAGE 3 OF 3
DWG.NO.	DD.HV305.FR4.T1

REV
0