

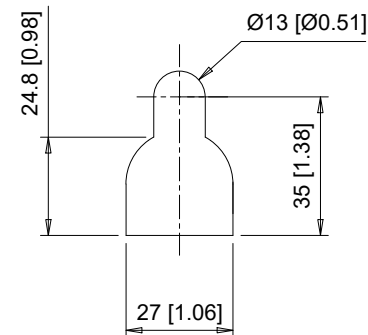


A B C D E F G H I J

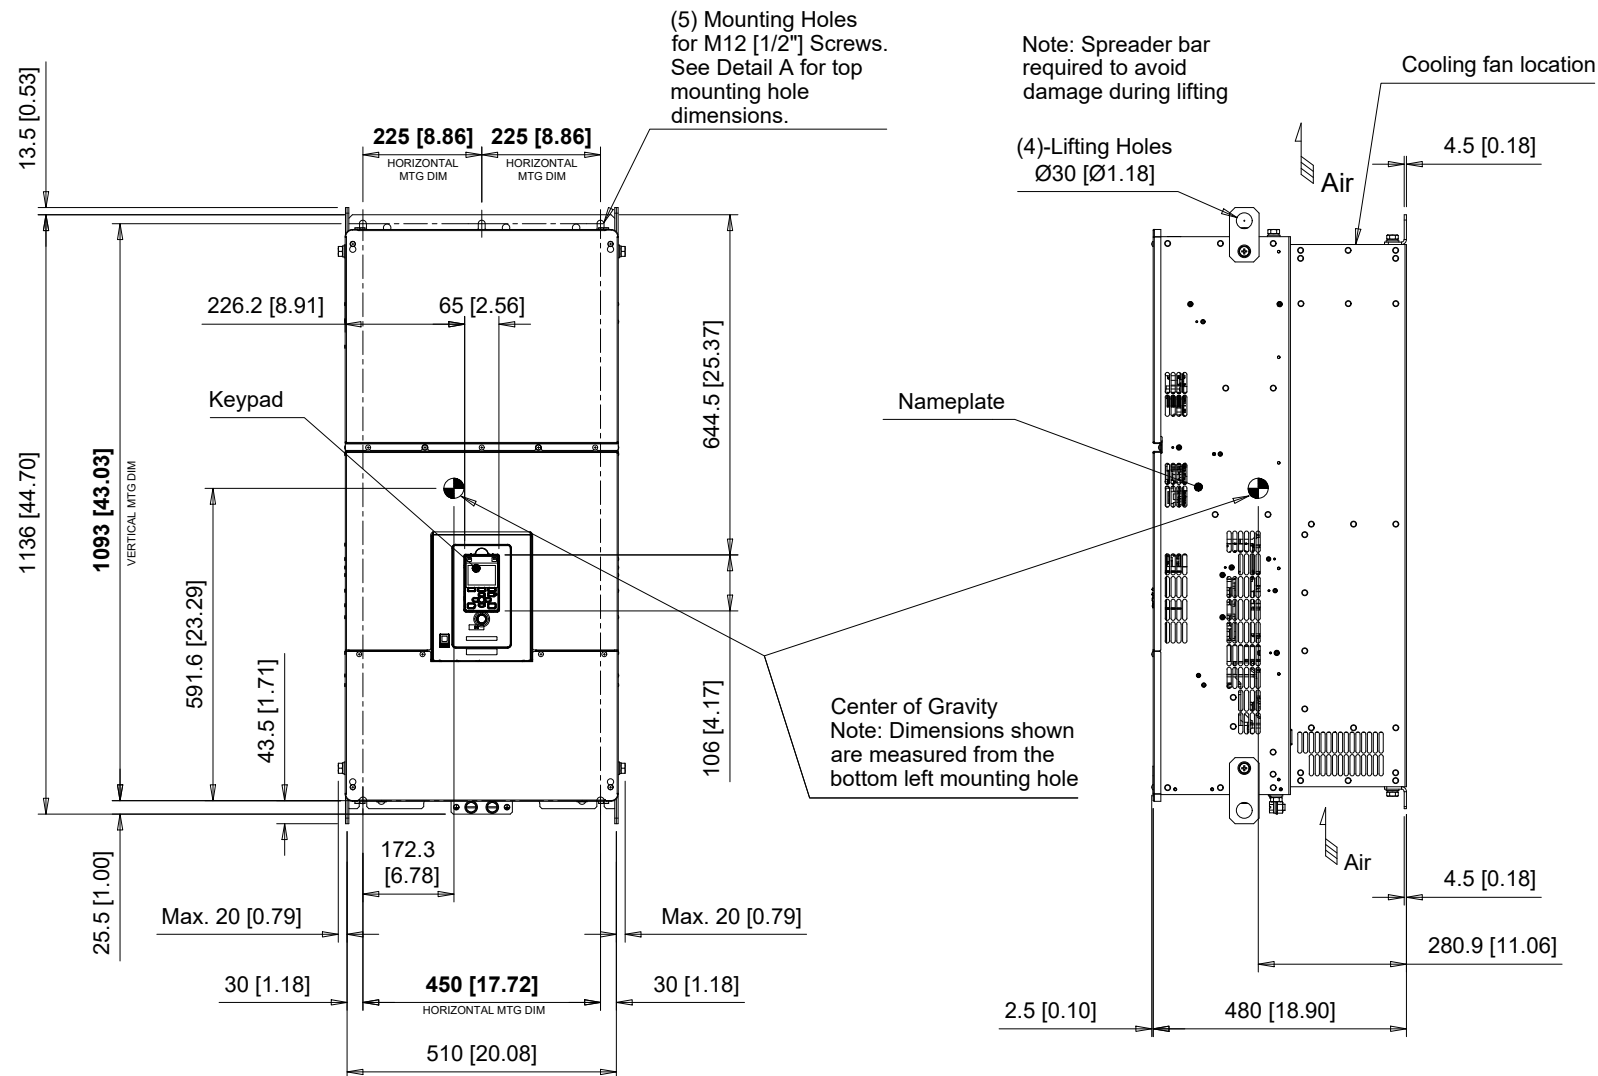


Detail A
Top mounting hole dimensions
Scale 1:2

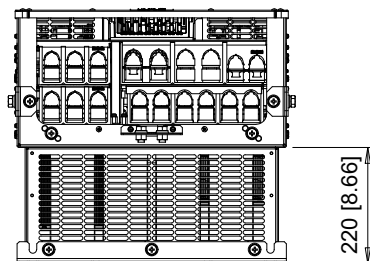

C/C: WM65□	INPUT VOLTAGE 3-PHASE (VAC)	WEIGHT Kg (lb)	COOLING FANS
4477□□□	380 TO 480	190 (418.9)	2
4515□□□		190 (418.9)	2
4590□□□		201 (443.1)	2
4720□□□		199 (438.7)	3

□ denotes A-Z

YASKAWA



UNITS MM [IN]


SCALE 1:15

DRWN.	J. MATTAS	12-17-24
CHKD.	J. PIOTROWSKI	1-23-25
TECH.	L. UDDIN	7-14-25
APRV.	M. BAUMGARDNER	7-22-25


TITLE
iQpump605 DIMENSION DRAWING
FRAME SIZE 11
IP20 ENCLOSURE

SIZE A
PAGE 1 OF 3
DWG.NO.
DD.WM605.FR11.IP20

REV
0

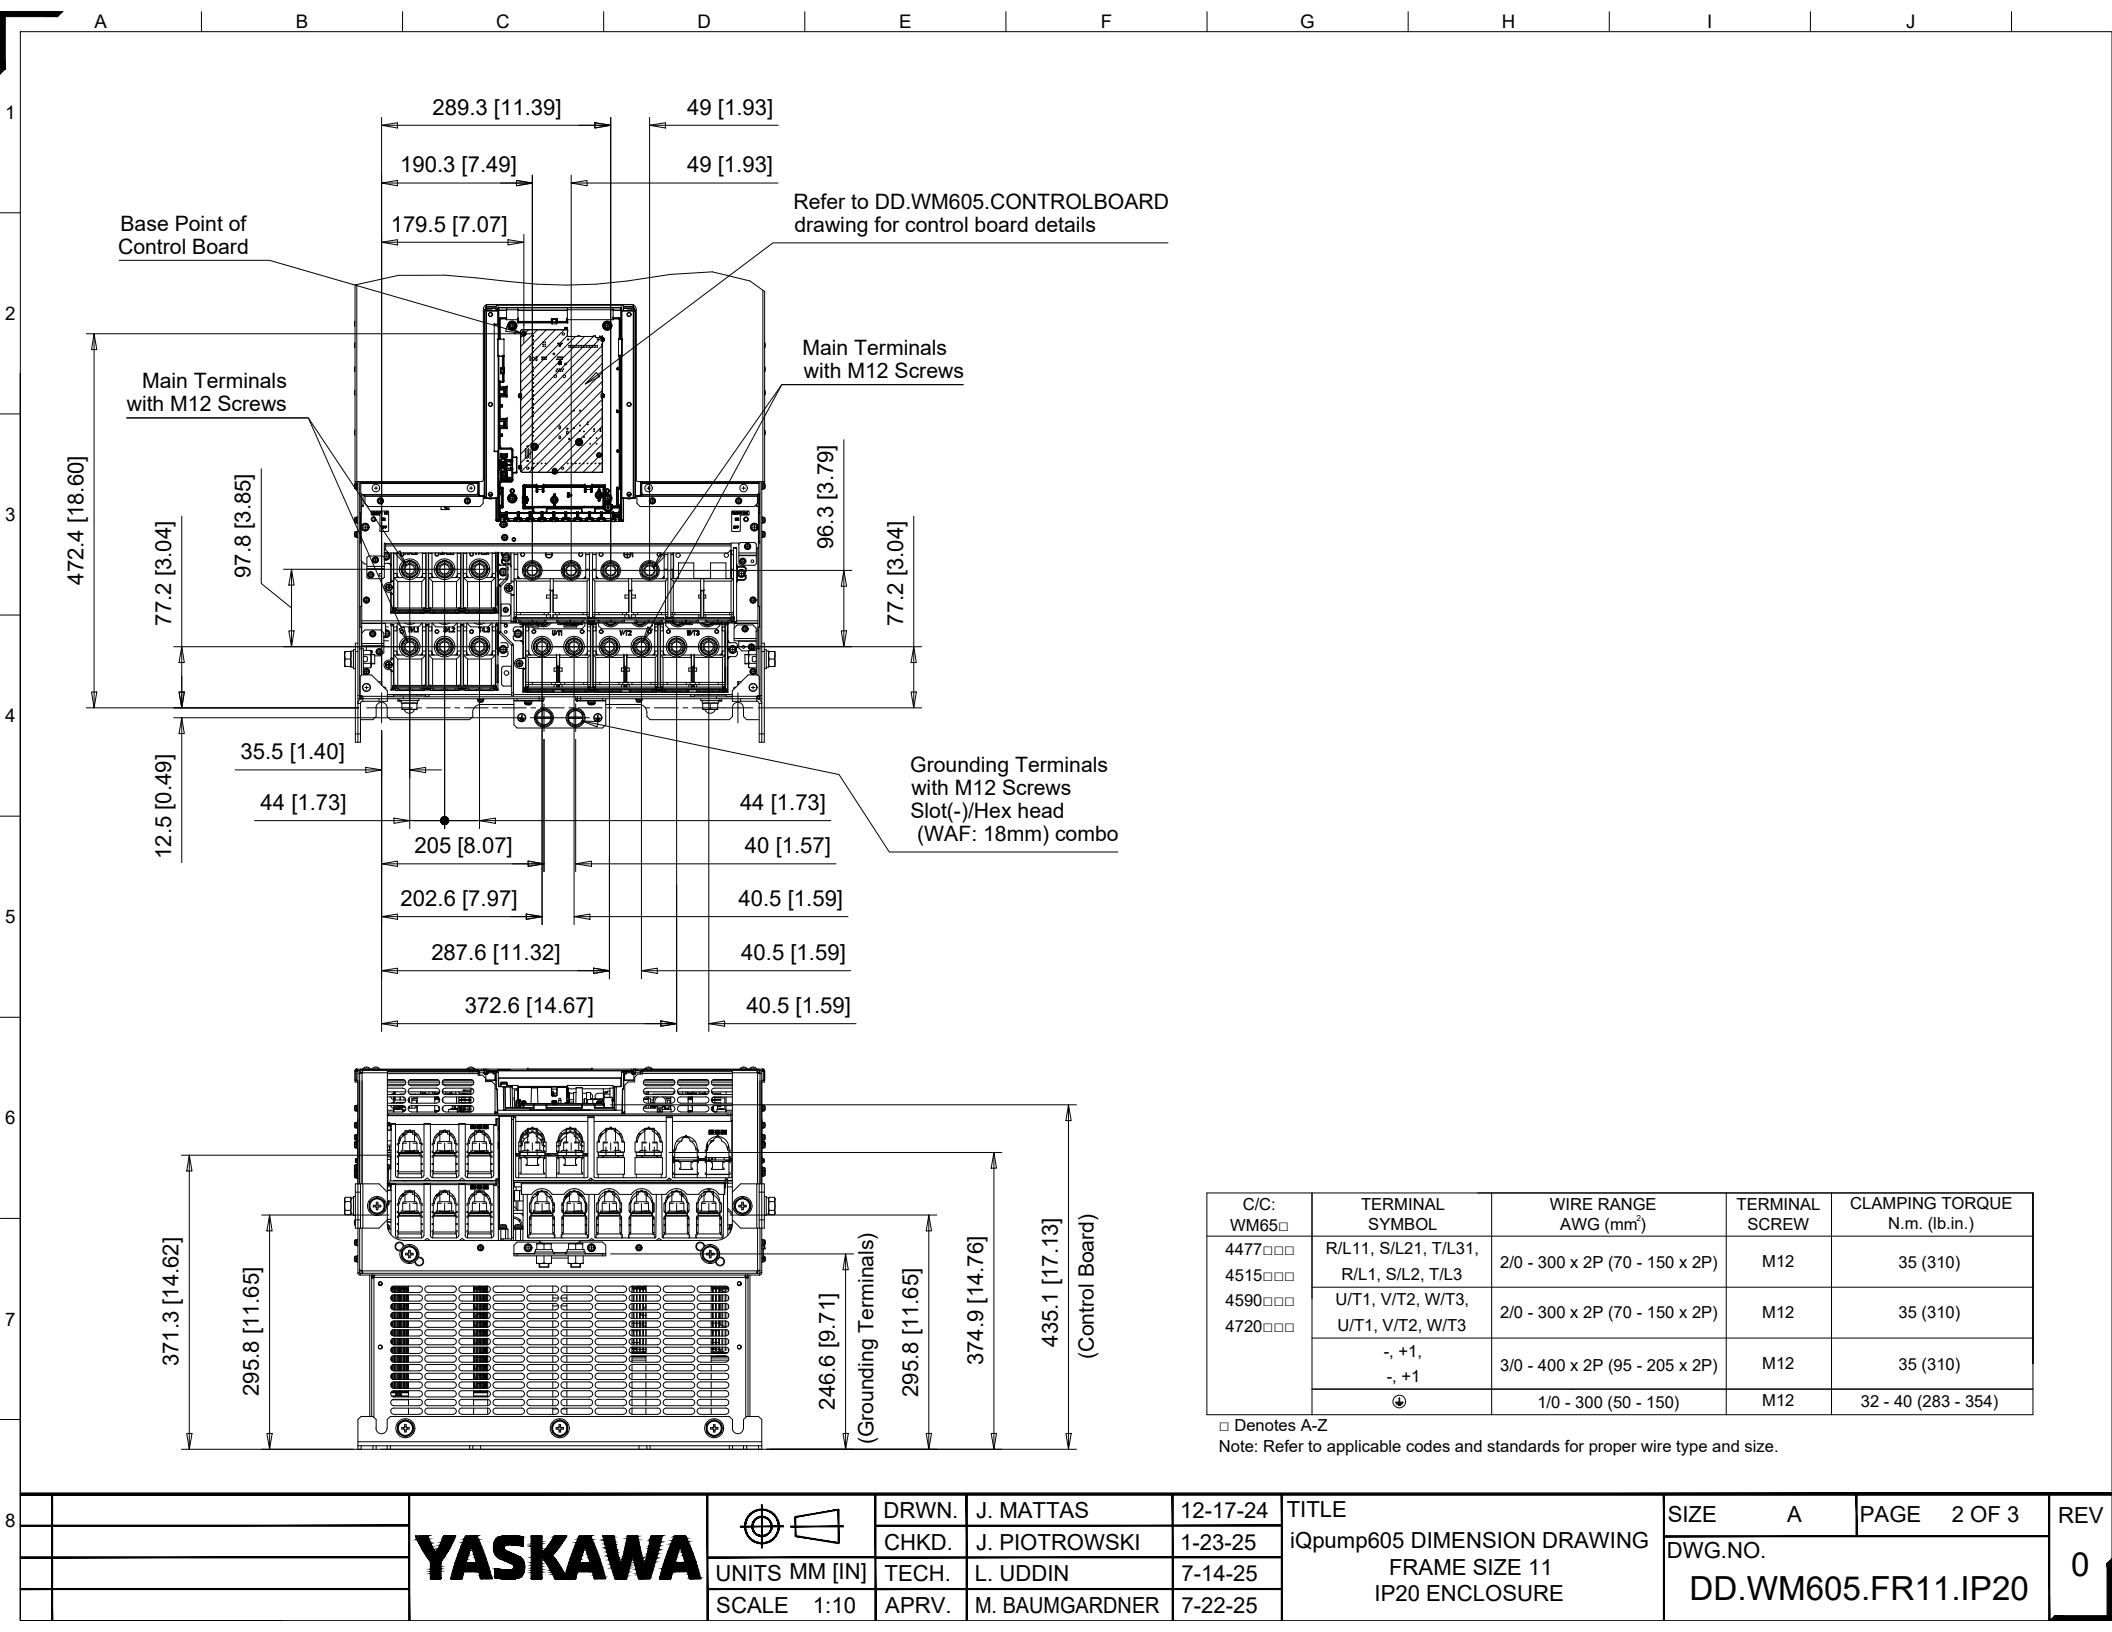


Minimum Installation Clearances

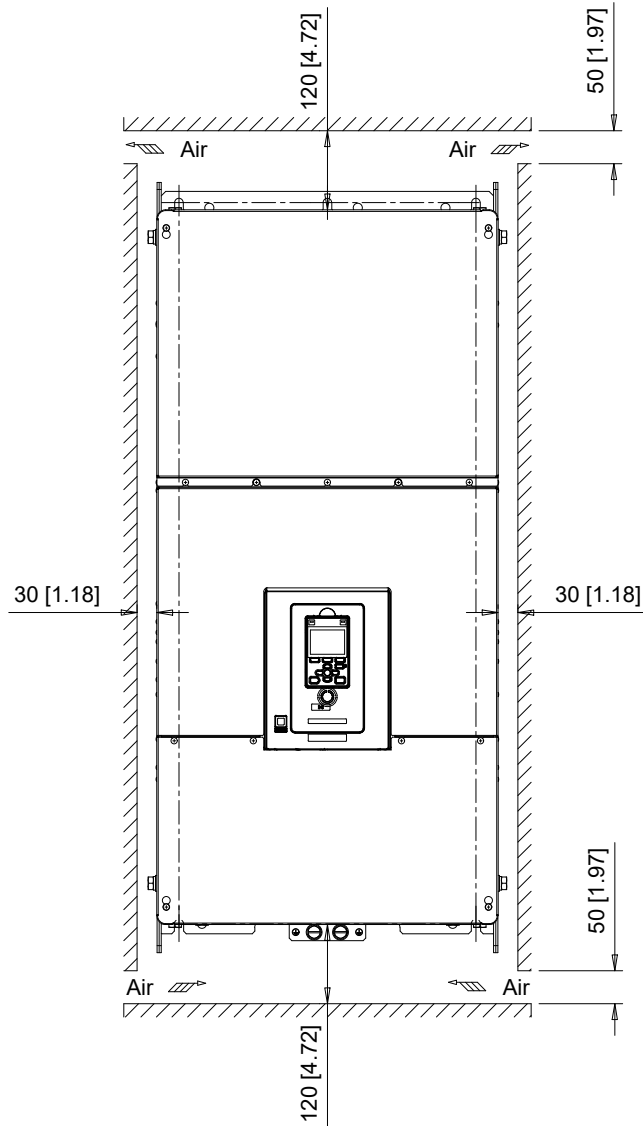


Note:
For alternate mounting configurations, consult manual.

Panel Cutout For External Heatsink Mounting Configuration

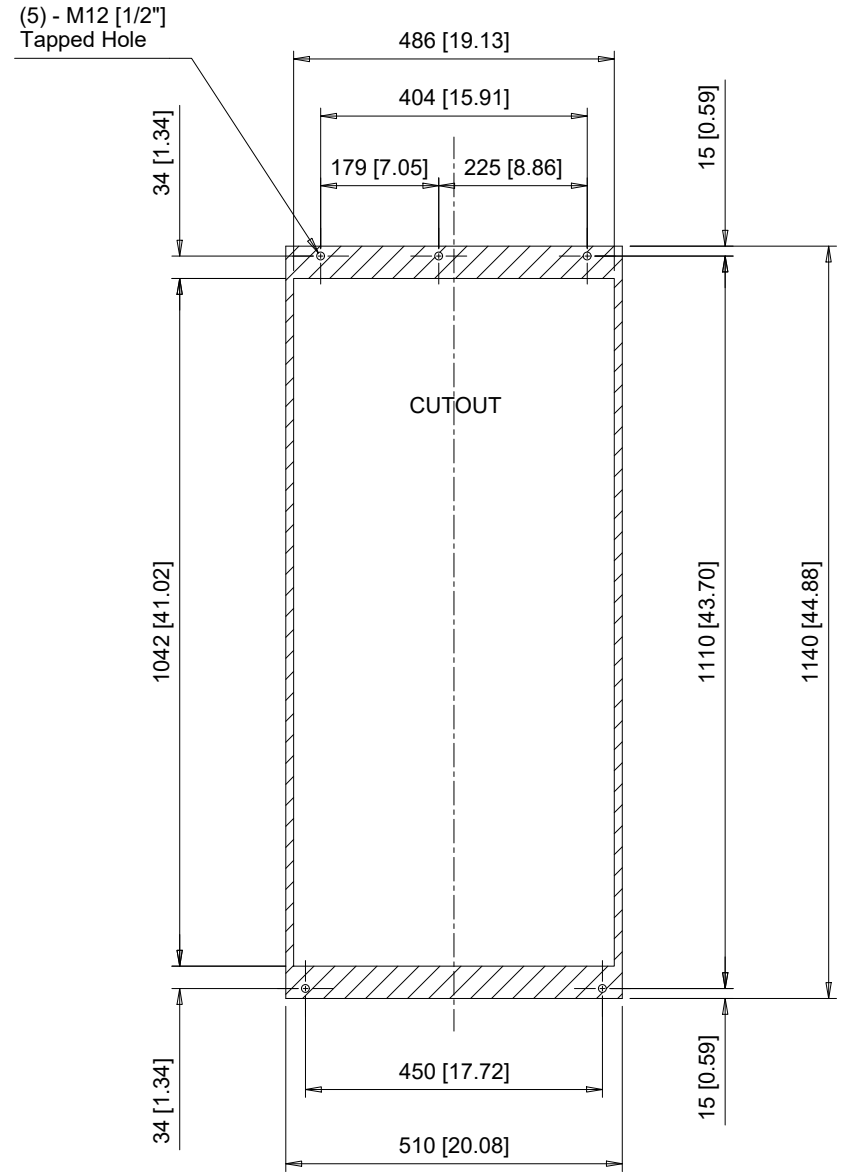

Notes:
Exposed heatsink minimum clearance D = 225 [8.86].
Refer to external heatsink instructions document for additional details.

YASKAWA



UNITS MM [IN]
SCALE 1:12

DRWN.	J. MATTAS	12-17-24
CHKD.	J. PIOTROWSKI	1-23-25
TECH.	L. UDDIN	7-14-25
APRV.	M. BAUMGARDNER	7-22-25

TITLE
iQpump605 DIMENSION DRAWING
FRAME SIZE 11
IP20 ENCLOSURE

SIZE A	PAGE 3 OF 3
DWG.NO. DD.WM605.FR11.IP20	

REV
0