

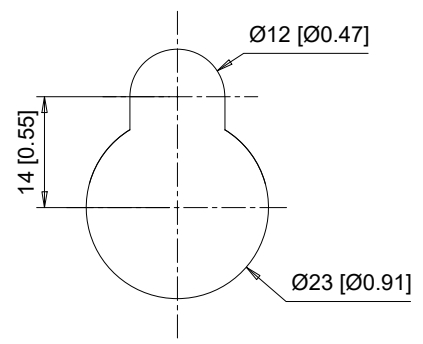


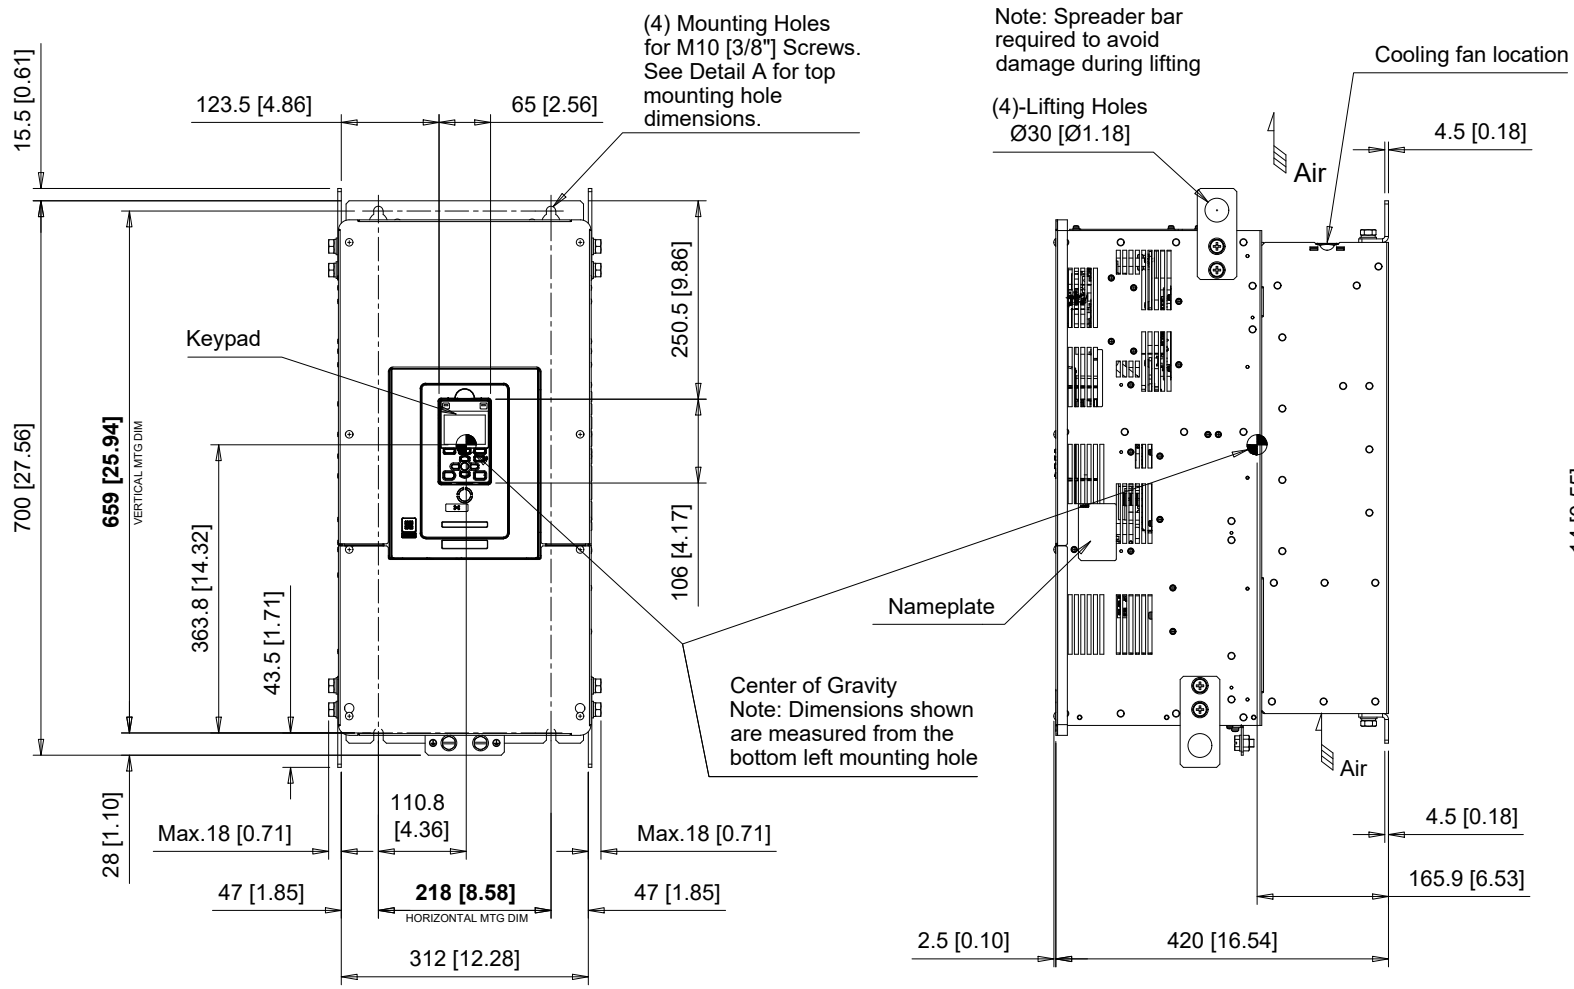


Detail A
Top mounting hole dimensions
Scale 1:1

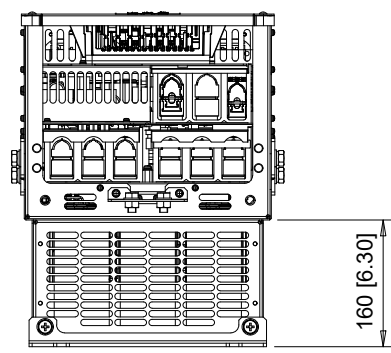

C/C: WM65□	INPUT VOLTAGE 3-PHASE (VAC)	WEIGHT Kg (lb)	COOLING FANS
2211□□□	200 TO 240	58 (127.9)	2
2273□□□		61 (134.5)	2
4180□□□		60 (132.3)	2
4240□□□	380 TO 480	62 (136.7)	2
4302□□□		65 (143.3)	2

□ denotes A-Z

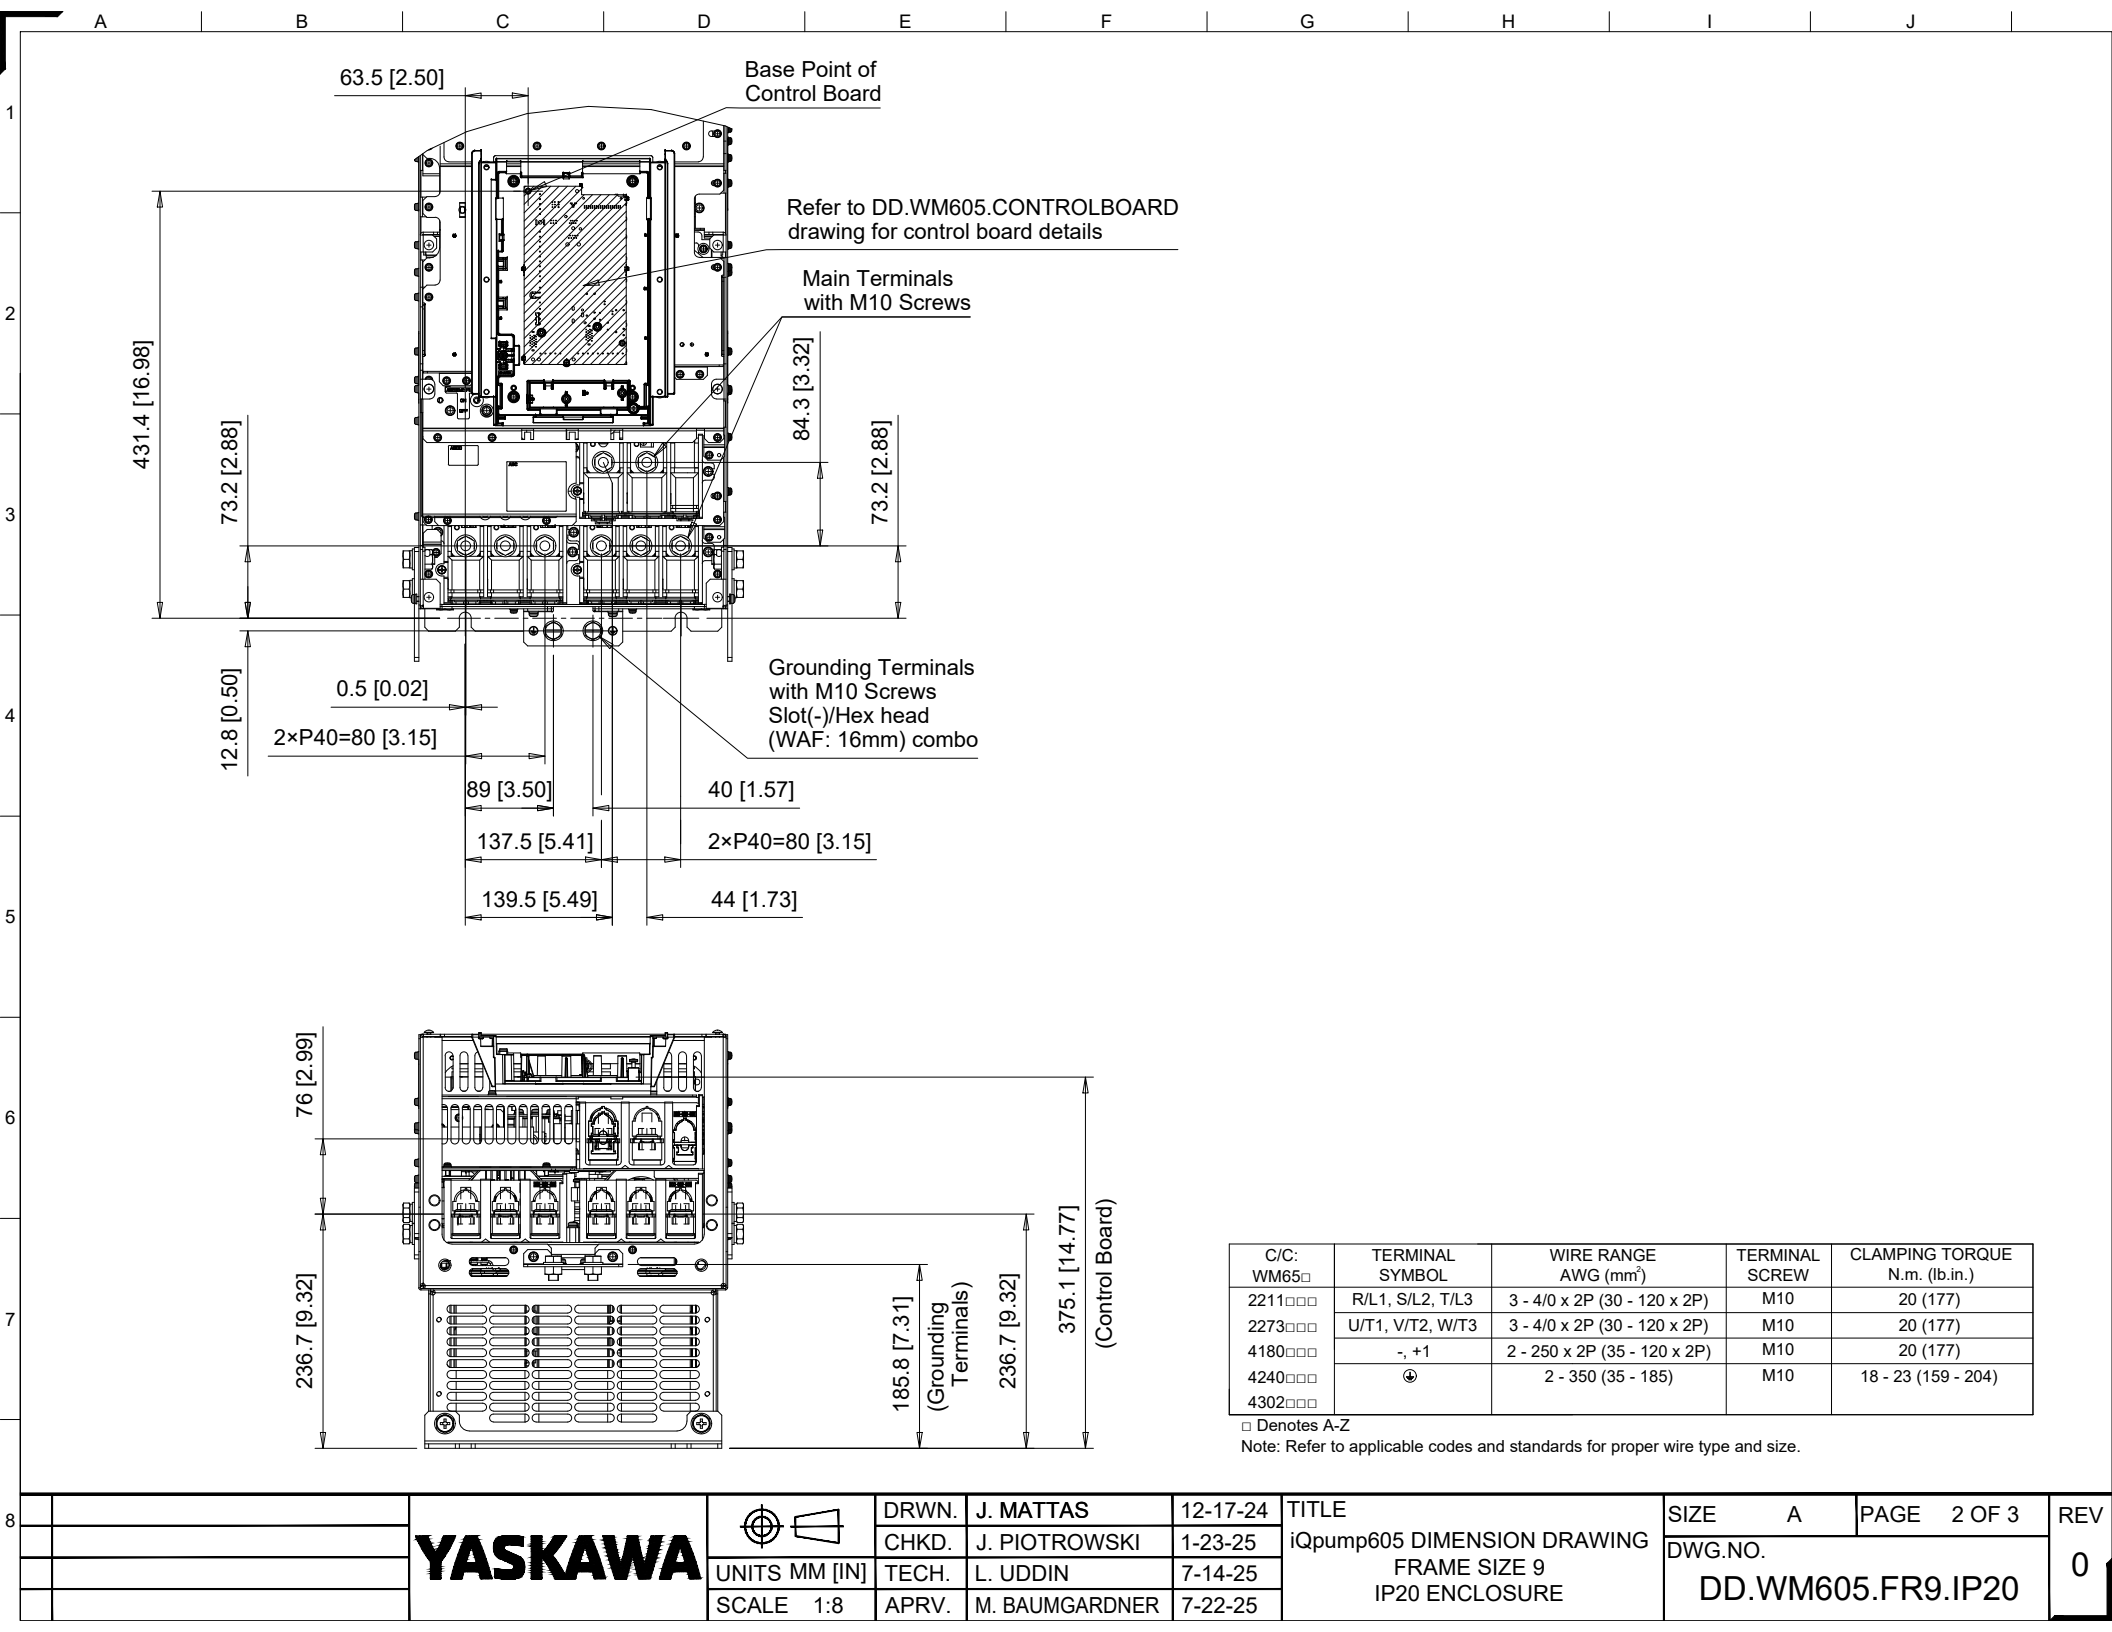

YASKAWA

UNITS MM [IN]
SCALE 1:8


DRWN. J. MATTAS 12-17-24
CHKD. J. PIOTROWSKI 1-23-25
TECH. L. UDDIN 7-14-25
APRV. M. BAUMGARDNER 7-22-25

TITLE
iQpump605 DIMENSION DRAWING
FRAME SIZE 9
IP20 ENCLOSURE

SIZE A
PAGE 2 OF 3
DWG.NO.
DD.WM605.FR9.IP20


REV
0

Minimum Installation Clearances

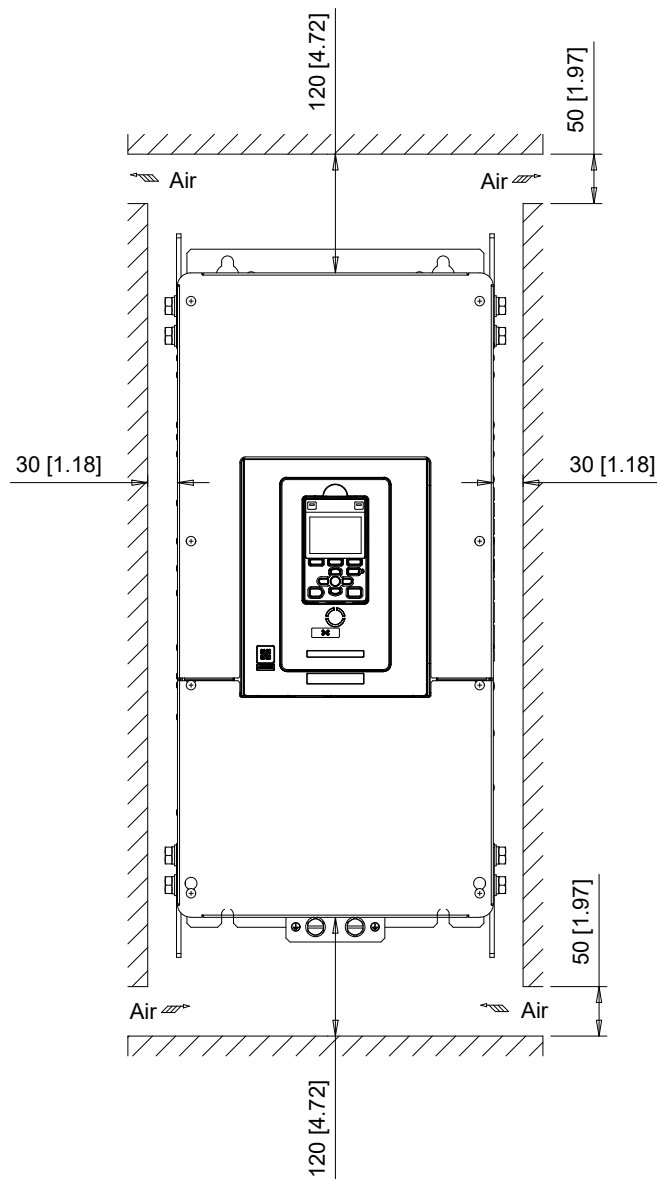


Note:
For alternate mounting configurations, consult manual.

Panel Cutout For External Heatsink Mounting Configuration

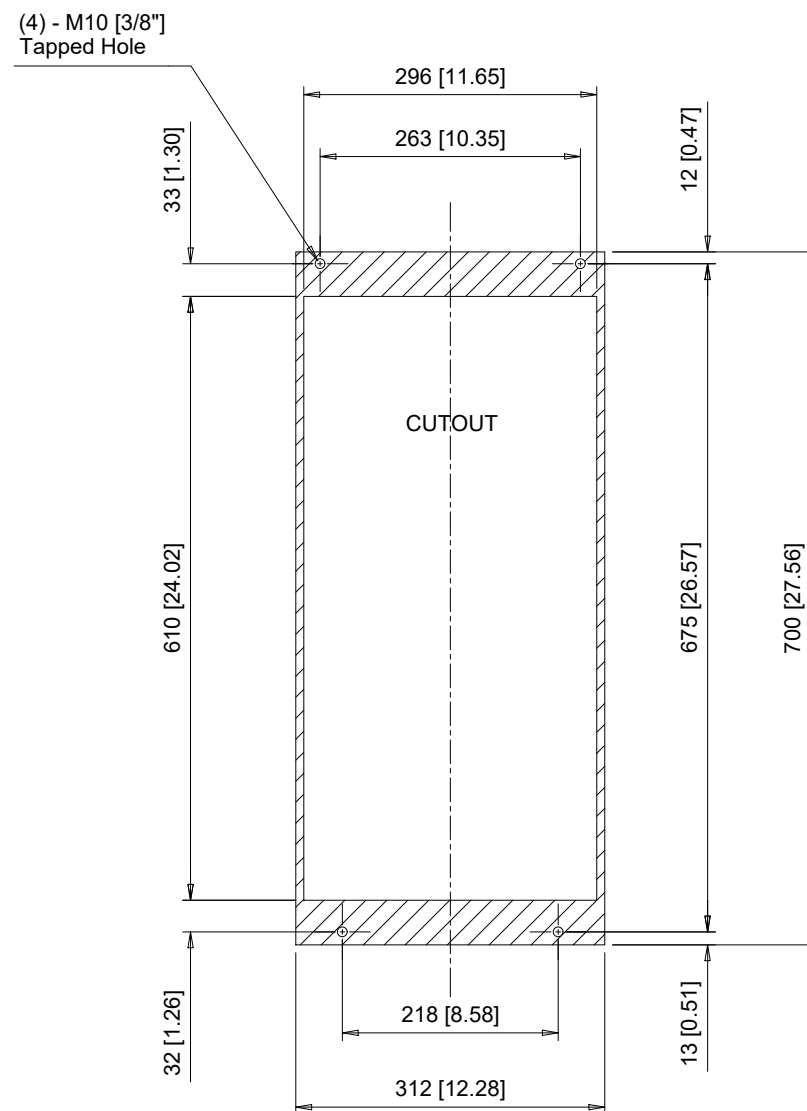

Notes:
Exposed heatsink minimum clearance D = 165 [6.50].
Refer to external heatsink instructions document for additional details.

YASKAWA



UNITS MM [IN]

SCALE 1:8

DRWN.	J. MATTAS	12-17-24
CHKD.	J. PIOTROWSKI	1-23-25
TECH.	L. UDDIN	7-14-25
APRV.	M. BAUMGARDNER	7-22-25

TITLE
iQpump605 DIMENSION DRAWING
FRAME SIZE 9
IP20 ENCLOSURE

SIZE A
PAGE 3 OF 3
DWG.NO.
DD.WM605.FR9.IP20

REV
0