
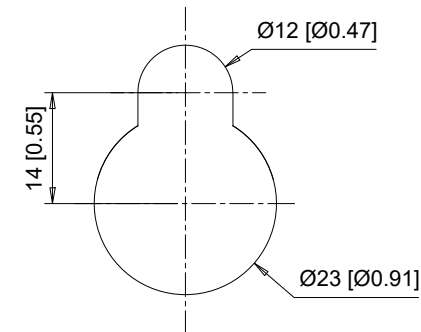


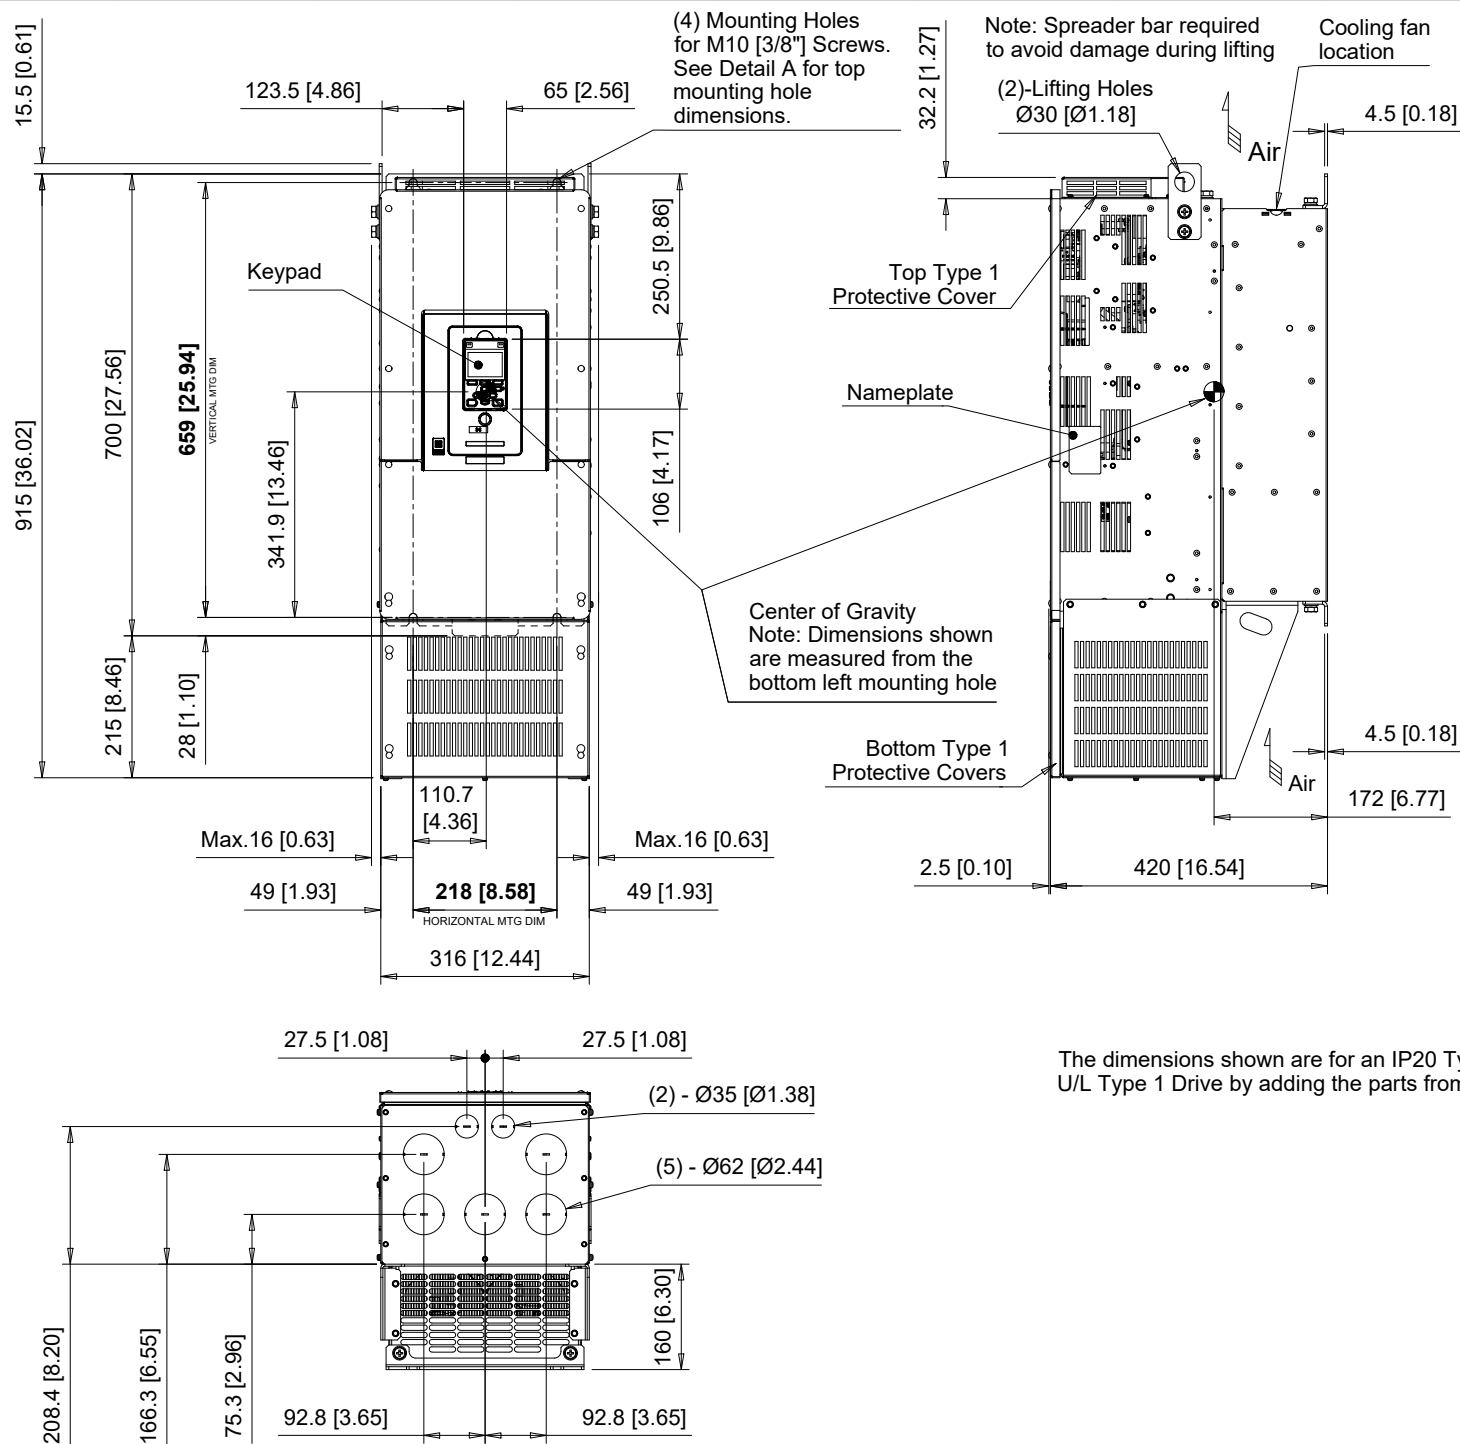


Detail A
Top mounting hole dimensions
Scale 1:1

The dimensions shown are for an IP20 Type Drive that has been converted to a U/L Type 1 Drive by adding the parts from U/L Type 1 Kit part number 900-192-121-009

C/C: WM65□	INPUT VOLTAGE 3-PHASE (VAC)	WEIGHT Kg (lb)	COOLING FANS
2211□□□	200 TO 240	66 (145.2)	2
2273□□□		69 (151.8)	2
4180□□□		68 (149.6)	2
4240□□□	380 TO 480	70 (154.0)	2
4302□□□		73 (160.6)	2

□ denotes A-Z

YASKAWA



UNITS MM [IN]


SCALE 1:12

DRWN.	J. MATTAS	1-8-25
CHKD.	J. PIOTROWSKI	1-23-25
TECH.	L. UDDIN	7-11-25
APRV.	M. BAUMGARDNER	7-24-25

TITLE
iQpump605 DIMENSION DRAWING
FRAME SIZE 9
IP20/UL TYPE 1 ENCLOSURE

SIZE A
PAGE 1 OF 3
DWG.NO.
DD.WM605.FR9.T1

REV
0

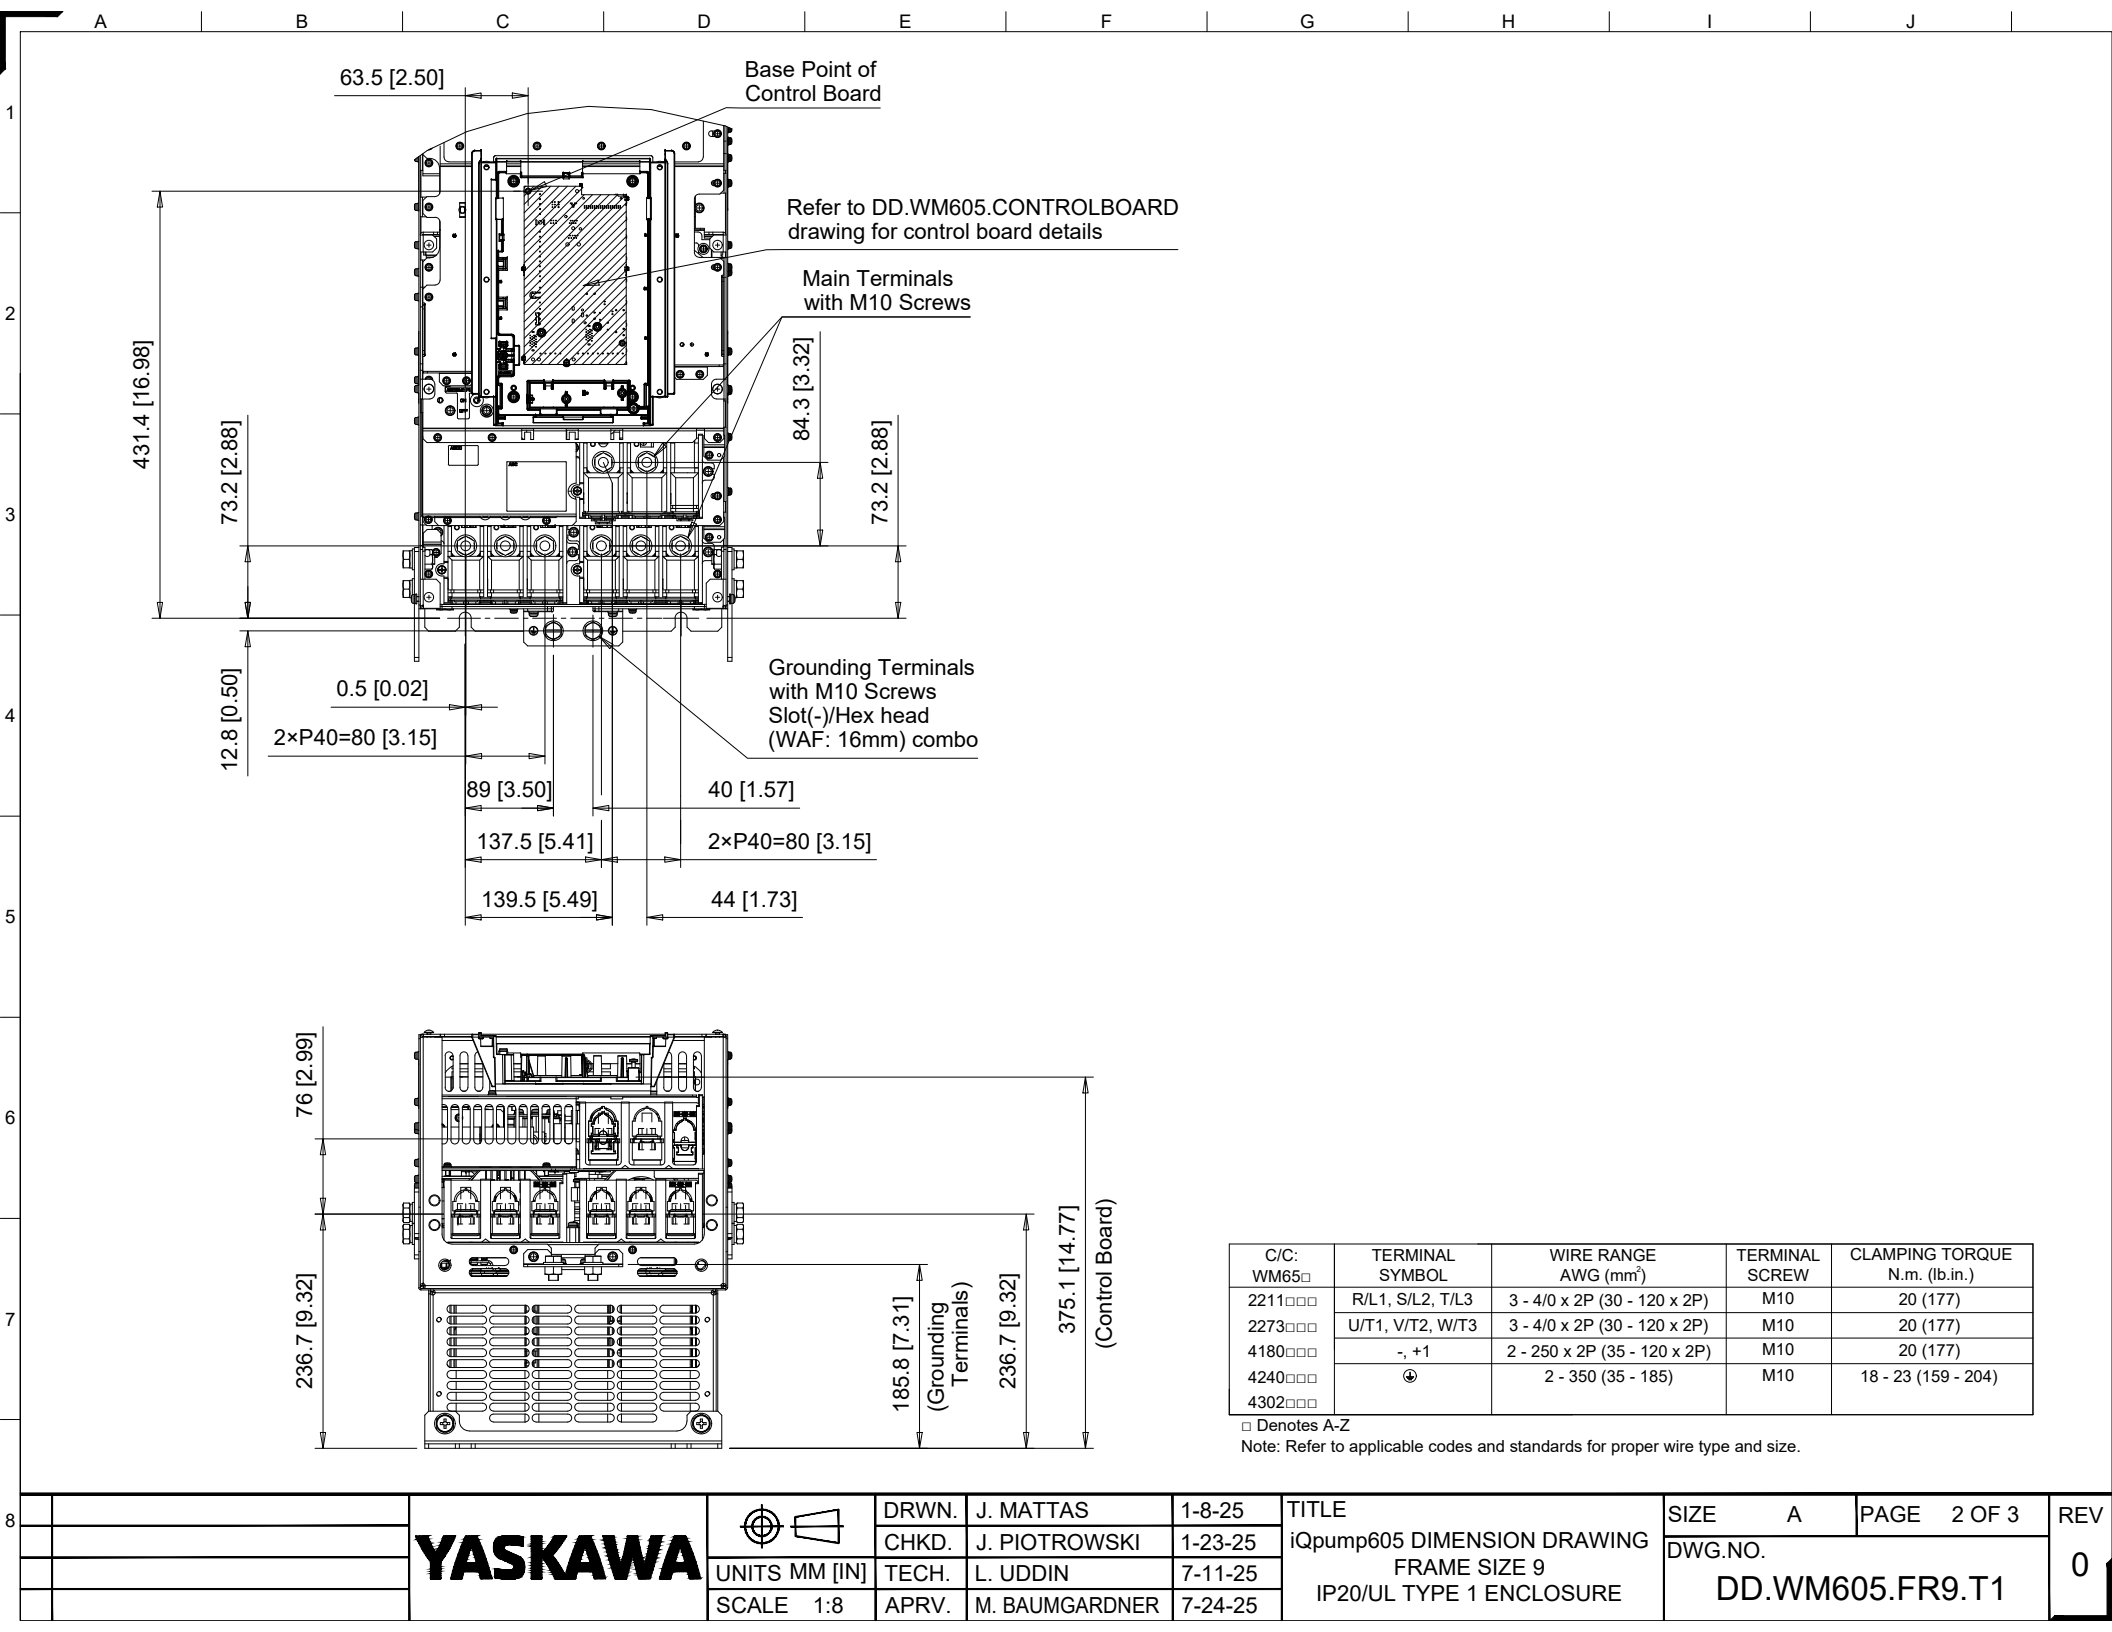

YASKAWA

UNITS MM [IN]
SCALE 1:8

DRWN. J. MATTAS
CHKD. J. PIOTROWSKI
TECH. L. UDDIN
APRV. M. BAUMGARDNER


1-8-25
1-23-25
7-11-25
7-24-25

TITLE
iQpump605 DIMENSION DRAWING
FRAME SIZE 9
IP20/UL TYPE 1 ENCLOSURE

SIZE A
PAGE 2 OF 3
DWG.NO.
DD.WM605.FR9.T1


REV
0

Minimum Installation Clearances (Scale 1:10)

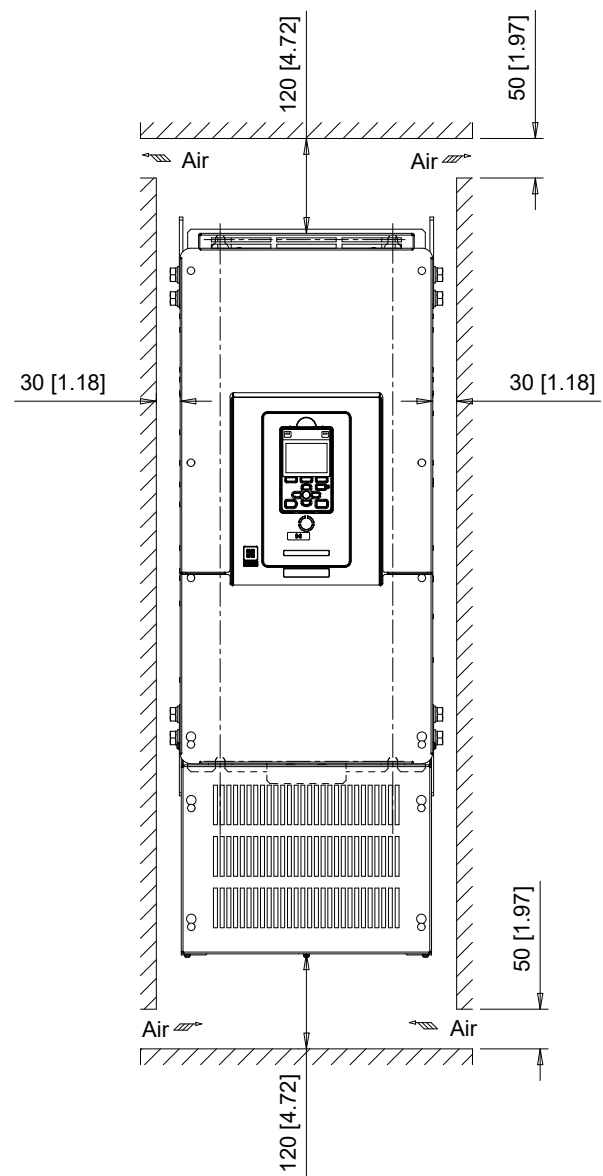

Note:
For alternate mounting configurations, consult manual.

YASKAWA



UNITS MM [IN]
SCALE ABOVE

DRWN.	J. MATTAS	1-8-25
CHKD.	J. PIOTROWSKI	1-23-25
TECH.	L. UDDIN	7-11-25
APRV.	M. BAUMGARDNER	7-24-25

TITLE
iQpump605 DIMENSION DRAWING
FRAME SIZE 9
IP20/UL TYPE 1 ENCLOSURE

SIZE	A	PAGE	3 OF 3	REV
DWG.NO.	DD.WM605.FR9.T1			0