


GA800 Standard 12 Pulse System Configuration

Note: For models 4810, 4930, 4H11, 4H12 input terminal jumpers must be removed. Consult technical manual for details on proper removal of the jumpers.

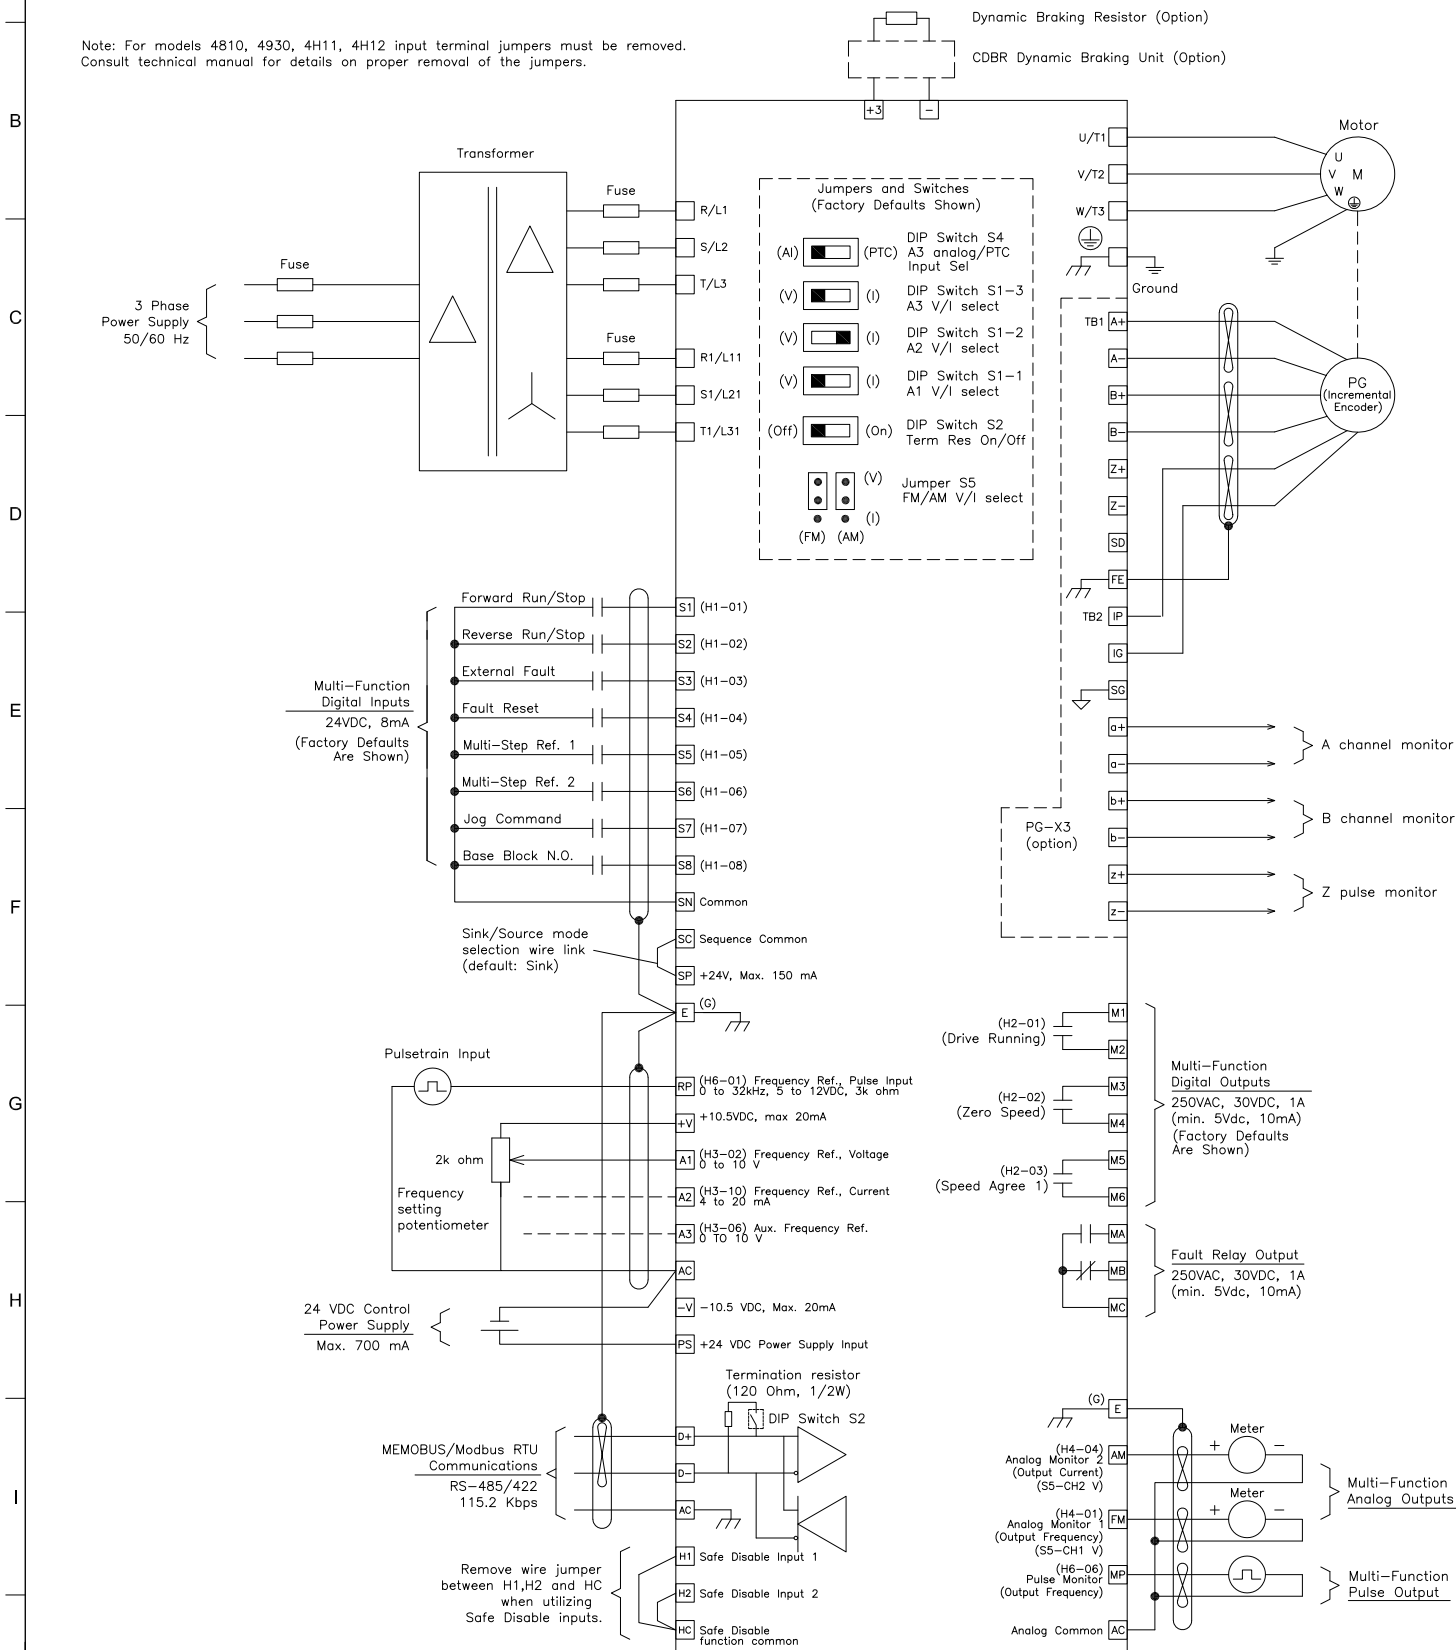

1 ADD INPUT JUMPER NOTE

Note: Refer to technical manual for further details.

YASKAWA


DRWN.	J. MATTAS	1-17-20
CHKD.	J. PIOTROWSKI	1-20-20
TECH.	T. UCHINO	1-29-20
APRV.	J. CAIRO	2-25-20

TITLE	GA800 DRIVE 12 PULSE STANDARD CONNECTION DIAGRAM
-------	---

SIZE	A	PAGE	1 OF 2	REV
DWG.NO.	DS.GA80.12P.01			
				1

GA800 Hybrid 12 Pulse System Configuration

Note: For models 4810, 4930, 4H11, 4H12 input terminal jumpers must be removed. Consult technical manual for details on proper removal of the jumpers.

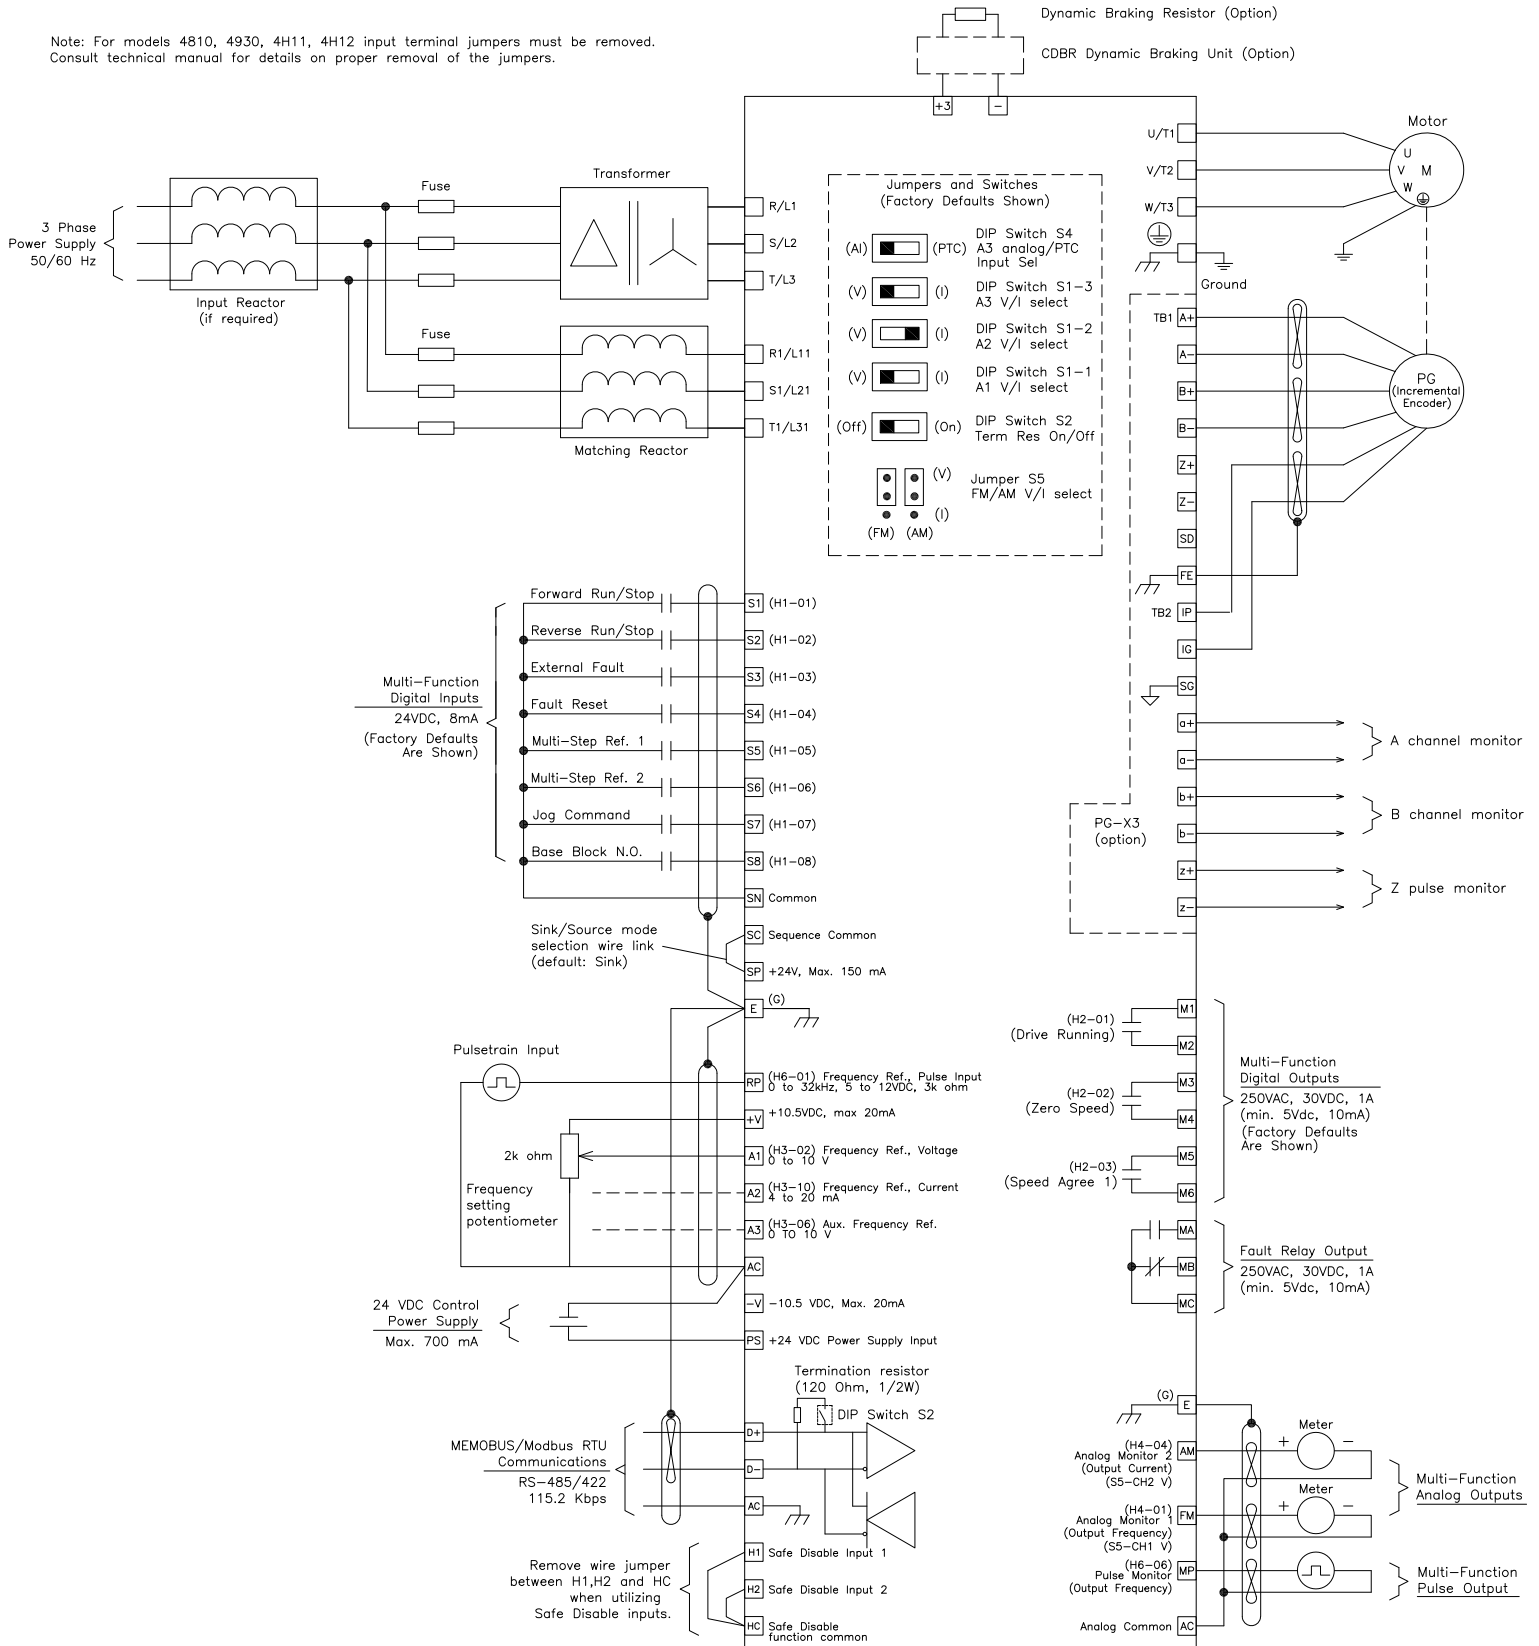

Note: Refer to technical manual for further details.

YASKAWA

DRWN.	J. MATTAS	1-17-20
CHKD.	J. PIOTROWSKI	1-20-20
TECH.	T. UCHINO	1-29-20
APRV.	J. CAIRO	2-25-20

TITLE

GA800 DRIVE 12 PULSE
STANDARD CONNECTION DIAGRAM

SIZE	A	PAGE	2 OF 2	REV	1
DWG.NO.	DS.GA80.12P.01				