


201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241

INPUT VOLTS	TERMINALS		JUMPER LOCATION
	A	B	
208	(H1)	(H2)	NONE
230/240	(H1)	(H4)	(H1) TO (H3) (H2) TO (H4)
460/480	(H1)	(H4)	(H2) TO (H3)
600	(H1)	(H2)	NONE

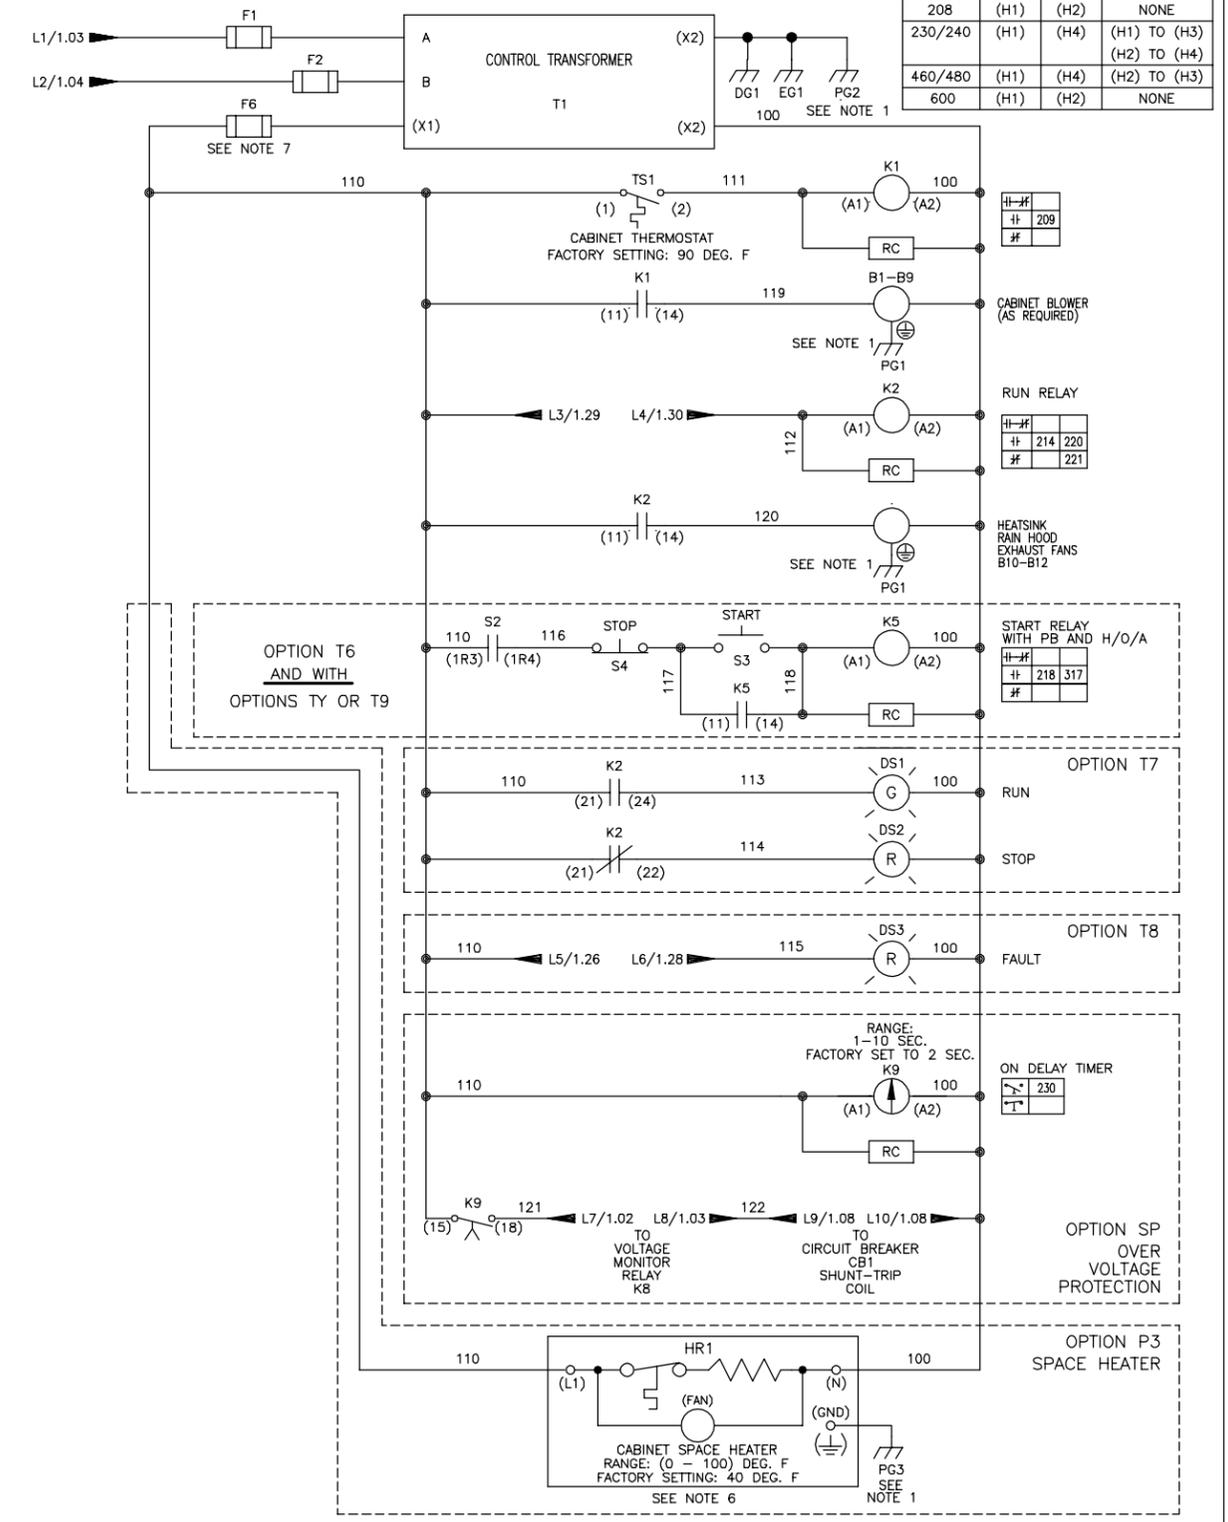

OPTION T6
AND WITH
OPTIONS TY OR T9

OPTION T7

OPTION T8






OPTION SP
OVER
VOLTAGE
PROTECTION

OPTION P3
SPACE HEATER

SEE SHEET 1 FOR NOTES.

YASKAWA	DRAWN BY:	D.R. CMELAK	DATE:	11/16/12	TITLE:	SCHEMATIC DIAGRAM		
	CHECKED:	D. PACKER	DATE:	11/16/12	TYPE:	IQPUMP1000 CONFIGURED		
TECH:			DATE:		SIZE:	D	REVISION:	08
APPROVED:		K. FLIERL	DATE:	11/16/12	PAGE:	2 of 3		
ORIGINAL DESIGN:		D.R. CMELAK	DATE:	11/16/12	DRAWING #:	DS.Q1C3R.08		

RUN/STOP CONTROL WITH OPTION TV (FROM SHEET 1)

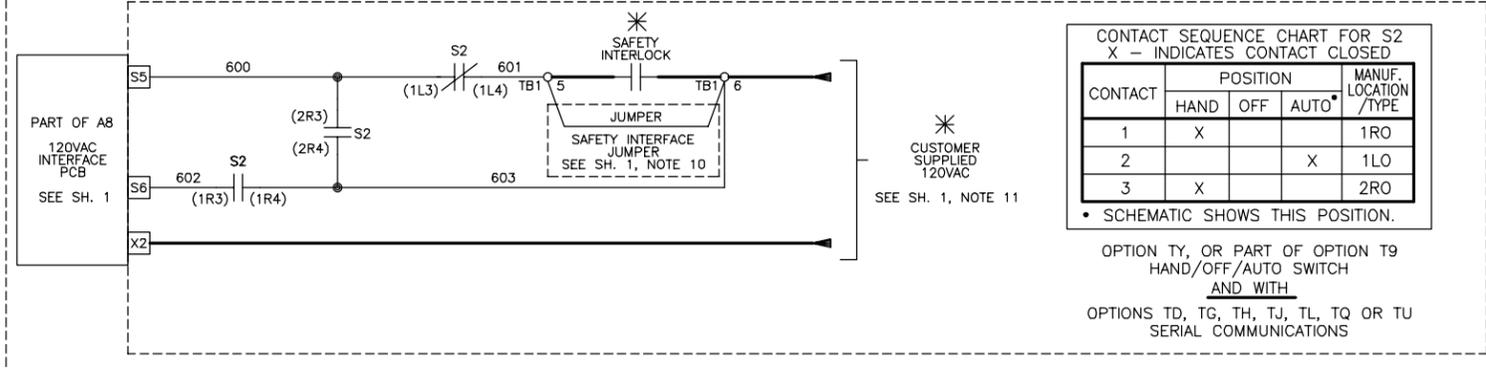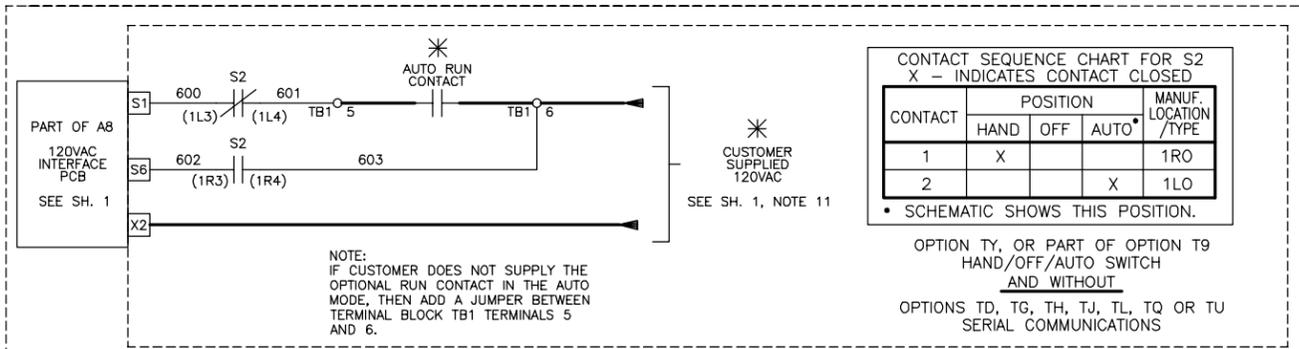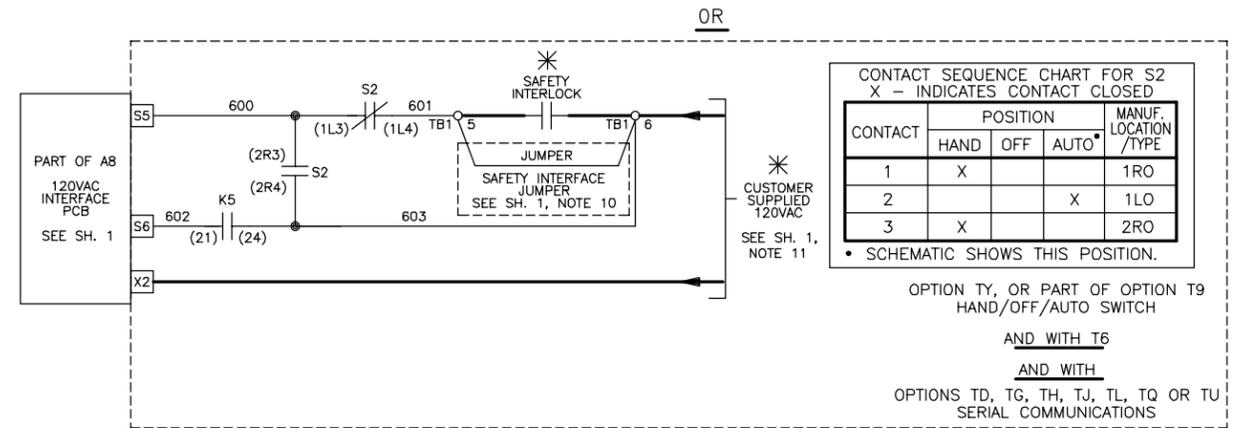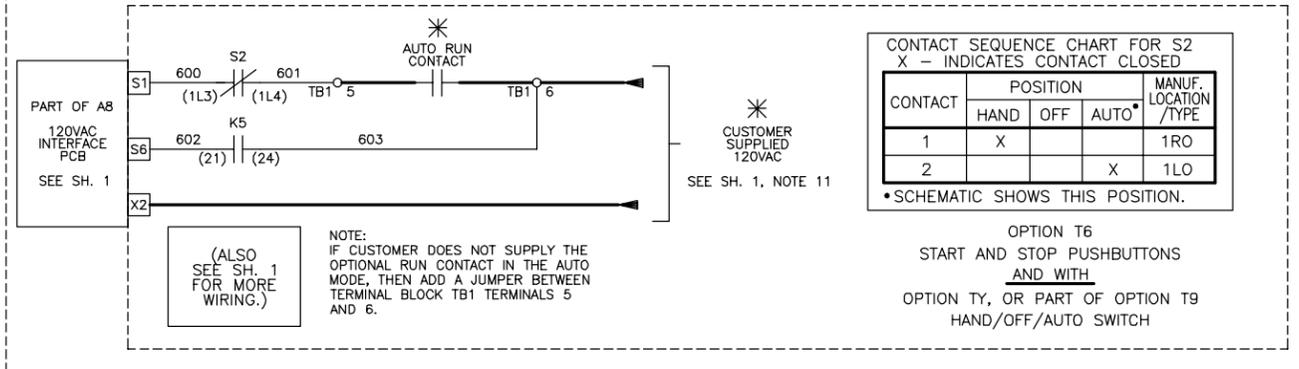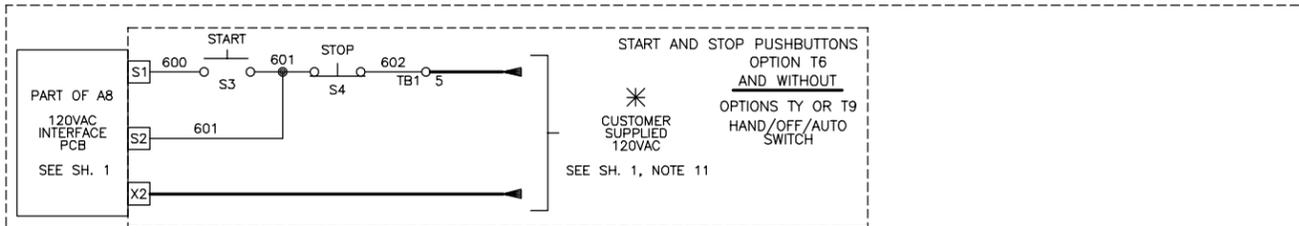

FOR ALL WIRE CONNECTION TO 120VAC INTERFACE PCB A8:
WIRE RANGE: (24 - 17) AWG.
WIRE TORQUE: (1.95 - 2.21) LB.-IN

SEE SHEET 1 FOR NOTES.

YASKAWA	DRAWN BY:	D.R. CMELAK	DATE:	11/16/12	TITLE:	SCHEMATIC DIAGRAM IQPUMP1000 CONFIGURED TYPE 3R				
	CHECKED:	D. PACKER	DATE:	11/16/12	SIZE:	D	REVISION:	08	PAGE:	3 of 3
APPROVED:		K. FLIERL	DATE:	11/16/12	ORIGINAL DESIGN:	D.R. CMELAK	DATE:	11/16/12	DRAWING #:	DS.Q1C3R.08
THIS DOCUMENT AND INFORMATION CONTAINED IN IT ARE CONFIDENTIAL, AND CANNOT BE COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF YASKAWA AMERICA INC.										