


DIMENSIONS: GPD315/V7 (NEMA 1)

S - 5488

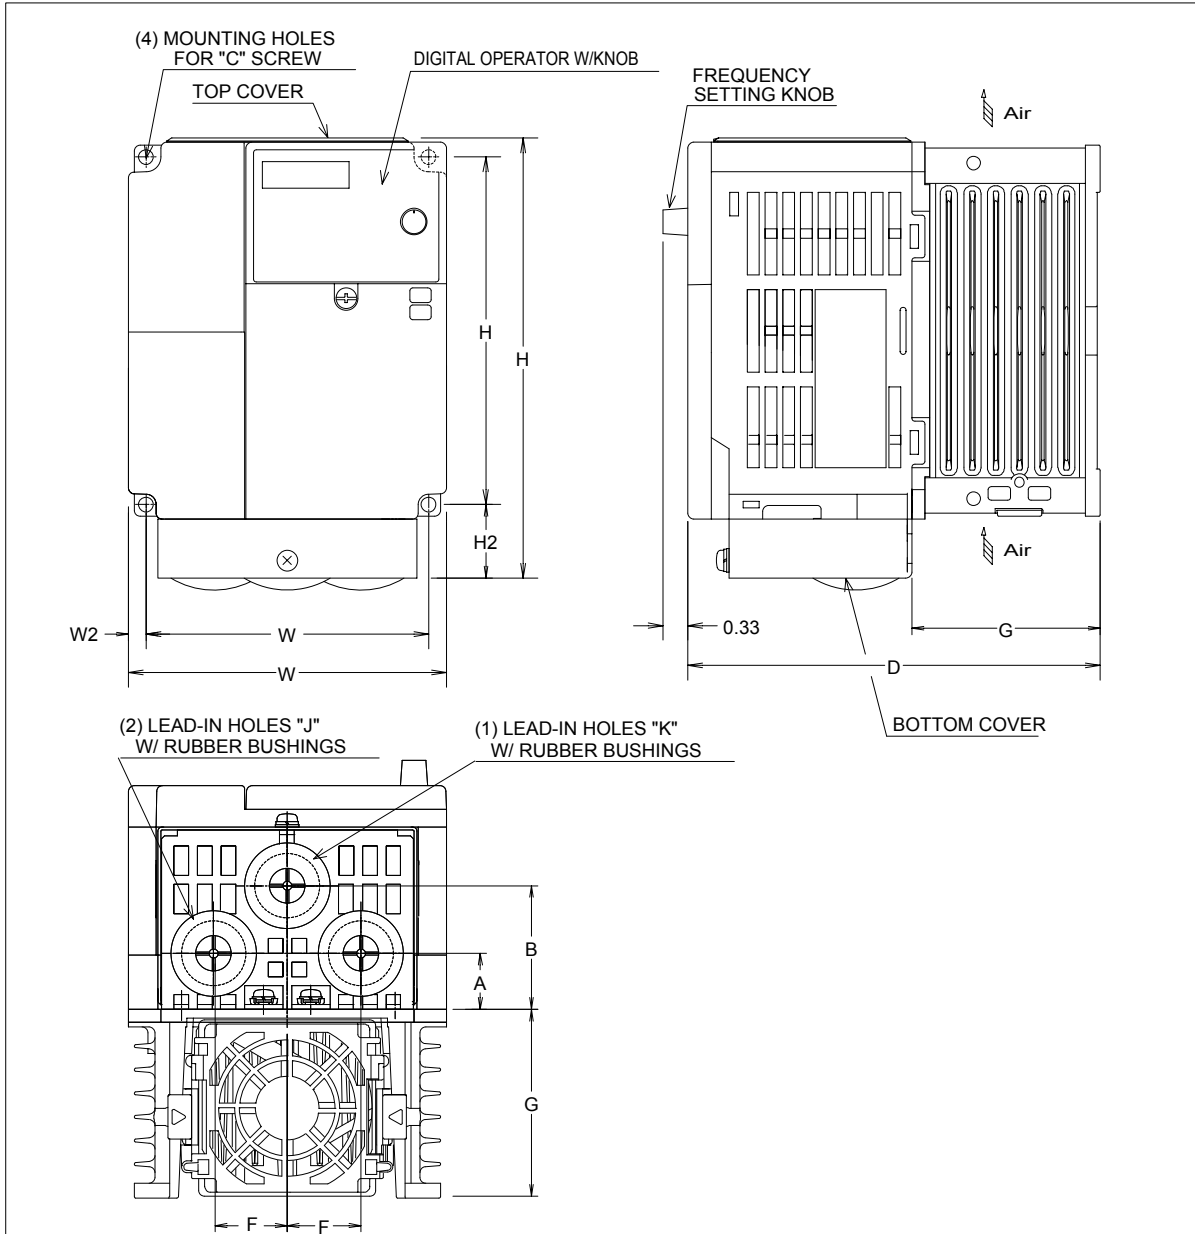

GPD315/V7 NEMA 1

VOLTAGE	MODEL# GPD315-	CIMR# CIMR-V7	OUTPUT CURRENT RATING (AMPS)	HP	DIMENSIONS IN INCHES													APPROX WEIGHT (LBS)		
					MOUNTING		H	W	H2	W2	A	B	C	D	F	G	J		K	
					H1	W1														
230	MVA008	21P5	8.0	2	4.65	3.78	5.83	4.25	.98	.24	.98	—	#8	5.16	.87	2.52	.88	.88	3.5	
	MVA011	22P2	11.0	3	4.65	3.78	5.83	4.25	.98	.24	.75	1.65	#8	5.51	.98	2.52	.88	.88	3.7	
	MVA017	23P7	17.5	5	4.65	5.04	5.83	5.51	.98	.24	.98	1.18	#8	5.63	1.48	2.80	1.10	.88	.88	5.3
460	MVB001	40P2	1.2	1/2	4.65	3.78	5.83	4.25	.98	.24	.75	1.65	#8	3.62	.98	.63	.88	.88	2.6	
	MVB002	40P4	1.8	3/4	4.65	3.78	5.83	4.25	.98	.24	.75	1.65	#8	4.33	.98	1.34	.88	.88	2.6	
	MVB003	40P7	3.4	1&2	4.65	3.78	5.83	4.25	.98	.24	.75	1.65	#8	5.51	.98	2.52	.88	.88	3.7	
	MVB006	41P5	4.8	3	4.65	3.78	5.83	4.25	.98	.24	.98	2.17	#8	6.14	.87	2.52	1.10	.88	3.7	
	MVB009	43P7	8.6	5	4.65	5.04	5.83	5.51	.98	.24	.98	1.18	#8	5.63	1.48	2.80	1.10	.88	5.3	

FOR REFERENCE ONLY UNLESS PROPERLY ENDORSED.

NOTES:

- THIS DRAWING SHOWS THE INVERTER UNIT HAVING A DIGITAL OPERATOR WITH FREQUENCY SETTING KNOB
- THERE ARE TWO OTHER TYPES:
DIGITAL OPERATOR WITHOUT KNOB AND BLANK COVER WITHOUT KNOB.



DR BY RIP 1-9-01
APPVL. SR

S - 5488