


YASKAWA

HMI PRODUCTS

READY FOR RELIABILITY

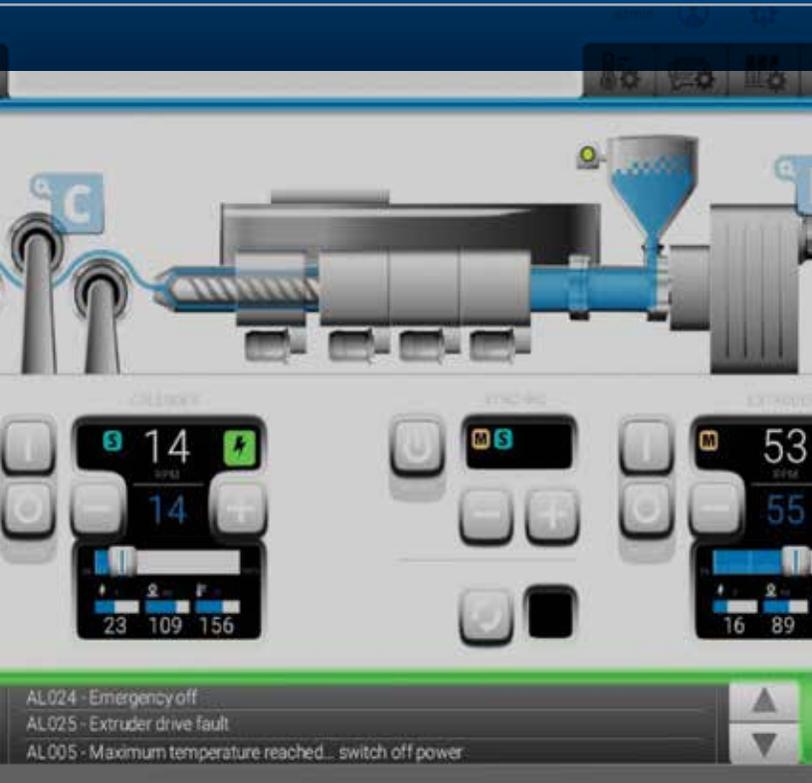

SMARTPANEL

The smartest choice for high usability, performance and connectivity to iC9200 and MPiec controllers.

The slim design and rugged resistive touch screen of the smartPanel is perfect for everyday industrial applications.

FEATURES

- ARM Cortex Processor
- Robust and durable- IP66 protection rating (front)
- Rugged resistive touchscreen
- Familiar Windows system environment
- Slim space saving profile
- OPC UA with iC9200 and PLCI communication with MP3300iec, MP2600iec, and Sigma-7Siec using native data types



MODELS AND SPECIFICATIONS


Model Number	H41-A1A41-O	H71-A1A41-O	HA1-A1A41-O
Display Size [In]	4.3	7	10
Resolution [Pixel]	480 x 272	800 x 480	1024 x 600
Touch Screen	Resistive		
Processor	ARM Cortex-A8 1GHz		
Interfaces	1x RS232/422/485; 1x USB-A; 1x Ethernet		
Work Memory [MB]	512		
Load Memory [GB]	4		
Housing	Plastic		
Protection	Front: IP66 / Rear: IP20		
Operating System	Linux		
Runtime	HMI Designer		

PANEL PC

The latest performance features and a precise, responsive capacitive touchscreen combine in Panel PC to deliver outstanding usability in a small space.

FEATURES

- Intel Celeron Processor
- Large integrated work memory
- High resolution responsive capacitive touchscreen
- Familiar Windows system environment
- Numerous interfaces for every application need
- Fanless construction
- High-quality metal housing
- OPC UA with iC9200 and PLCI communication with MP3300iec, MP2600iec, and Sigma-7Siec using native data types

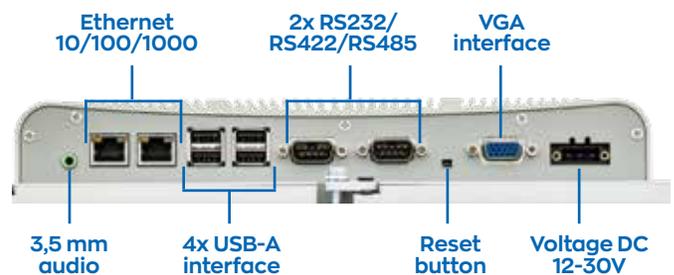

MODELS AND SPECIFICATIONS

Model Number	67K-RTPO-KJ	67P-RTPO-KJ	67S-RRTPO-KJ
Display Size [in]	10.1	15.6	21.5
Resolution [Pixel]	1280 x 800	1366 x 768	1920 x 1080
Touch Screen	Capacitive		
Processor	Intel Celeron J1900 Quadcore x 2.0 GHz		
Interfaces	2x Ethernet; 2x RS232/422/485 (SUB-D)	2x USB 2.0; 1x USB 3.0;	1x VGA; 1x Audio out
Work Memory [GB]	8		
User Memory [GB]	64		
Card Slot	CFast		
Casing	Aluminium		
Protection	Front: IP65 / Rear: IP20		
Operating System	Windows 10 IoT		
Runtime	HMI Designer		

HMI Designer

Integrated HMI Development Environment


FEATURES


- 200+ drivers (HMI can act as a protocol converter)
- Recipe Manager
- Alarm Handling
- JavaScript
- Trending
- Datalogging
- Project simulation
- OPC UA online browsing
- OPC UA tags synchronize with iCube Engineer projects
- Projects on Yaskawa panels
- Projects on PC's
- Projects on iC9200
- Modbus/TCP tag import from Motionworks IEC project

HMI Designer is an HMI development environment that is included with iCube Engineer at no additional cost.

It is available as a stand-alone version also for use with MPiec products using the Modbus/TCP driver.

Projects can run on smartPanels, PanelPCs, PCs, iC9200, or HTML5 web panels and iCube Engineer OPC UA tags will synchronize with the HMI project.

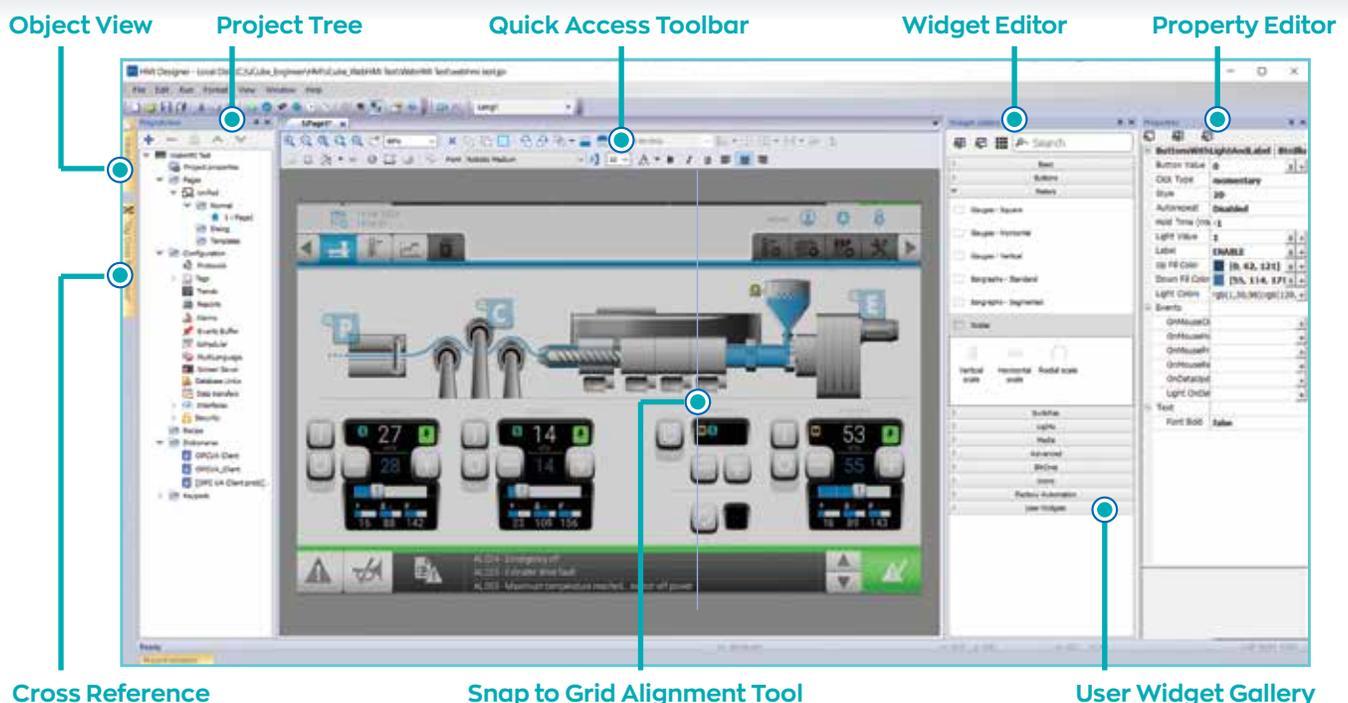


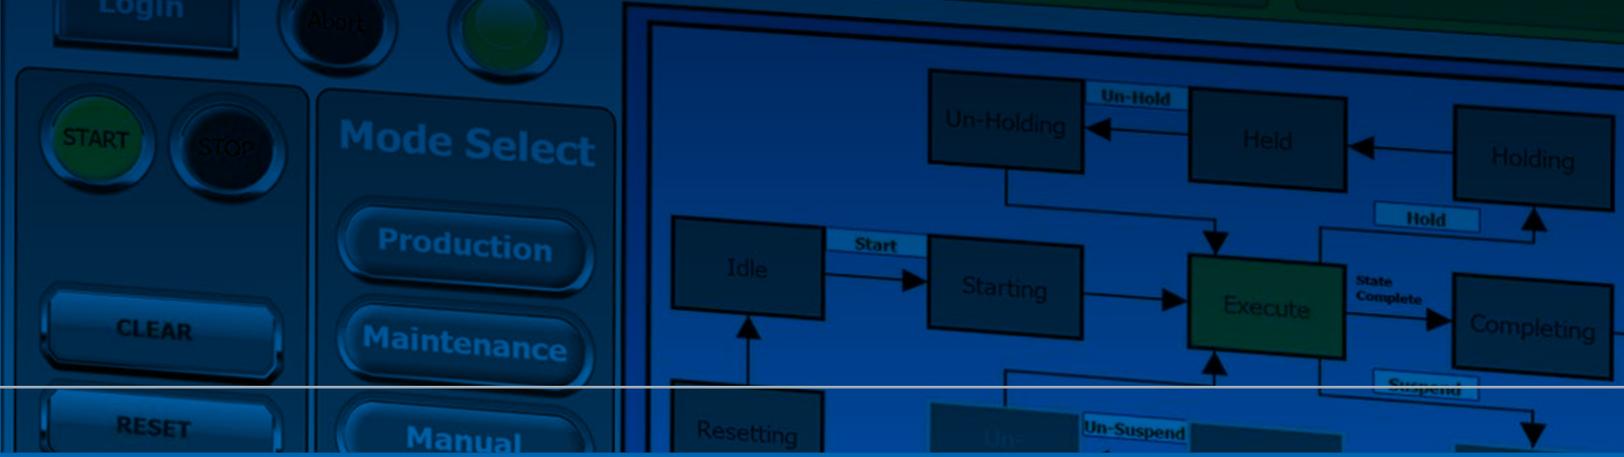

HMI DESIGNER COMMUNICATION



- OPC UA is the preferred communications protocol
- HMI is the Client
- Controller is the Server
- Security settings are available
- User data types are transferred to the HMI project
- Structures, arrays, etc., don't need to be broken down by the user

Data	Type	Tag name
OPC UA Client	Container	
Model Default	Container	
Objects	Container	
AppRcEdit	Container	
S_AL_0	Int16	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AL_0
S_AL_1	Int16	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AL_1
S_AL_2	Int16	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AL_2
S_AL_3	Int16	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AL_3
S_AName_Normal	Boolean	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AName_Normal
S_AO_0	Int16	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AO_0
S_AO_1	Int16	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AO_1
S_AO_2	Int16	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AO_2
S_AO_3	Int16	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AO_3
S_AXI1_Data	Container	
Acceleration	Double	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AXI1_Data/Acceleration
Alarm	Boolean	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AXI1_Data/Alarm
Can	Container	
ClearanceData	Container	
InMode	Int16	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AXI1_Data/Can/ClearanceData/InMode
RampOut	Double	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AXI1_Data/Can/ClearanceData/RampOut
RampOutData1	Double	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AXI1_Data/Can/ClearanceData/RampOutData1
RampOutData2	Double	siAServer@192.168.1.1/Objects/PLC/Check/PLC/Ed/S_AXI1_Data/Can/ClearanceData/RampOutData2

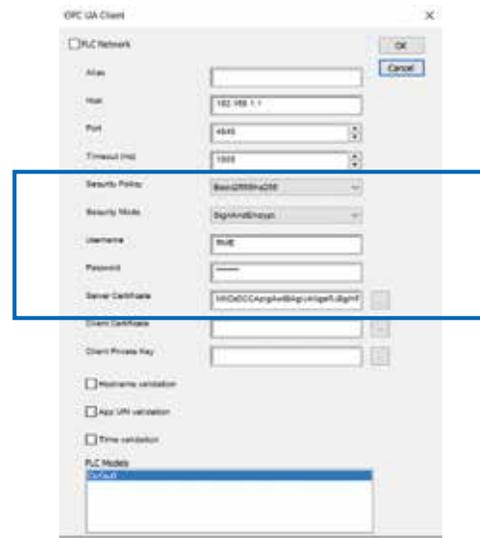

HMI PROJECT ON iC9200

- iC9200 hosts the HMI project (WebVisu)
- Uses iCube resources (3rd core processor, memory)
- Generic HTML5 device used for viewing
- iC9200 is selected as the target
- If "unified" project is selected (default), same project can be sent to controller or HMI panel

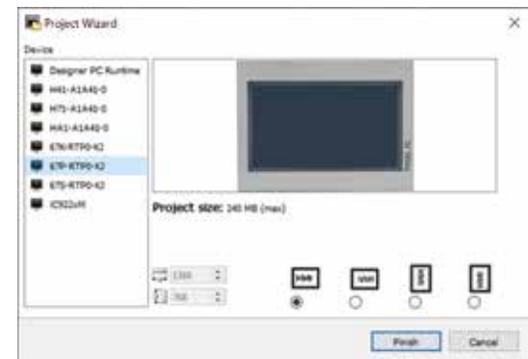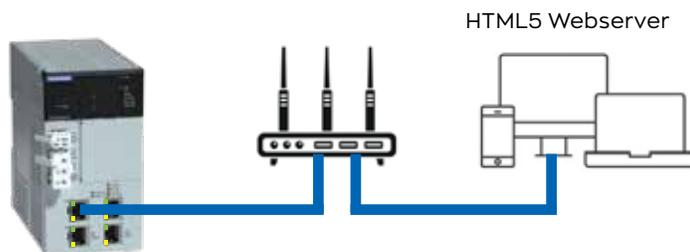

YASKAWA.COM



Yaskawa is the leading global manufacturer of low and medium voltage variable frequency drives, servo systems, machine controllers and industrial robots. Our standard products, as well as tailor-made solutions, are well known and have a high reputation for outstanding quality and reliability.

YASKAWA

Yaskawa America, Inc. | Drives & Motion Division

1-800-YASKAWA | Email: info@yaskawa.com | yaskawa.com

Document No. BL.MTN.03 | 09/24/2024 | © 2021 Yaskawa America, Inc.