


No.	ITEM#	DESCRIPTION	QTY.	NOTES
1		CONNECTOR CAP, MFG#: 350780-1	1	AMP
2	JZSP-CMM9-1			
3		SOCKET (PIN 1~4), MFG#: 350570-3 or 350689-3	4	AMP
4	JM54453	CABLE, 20AWG x 4C, FLEXIBLE PVC	-	James Monroe Wire
5	1.25-M4 or 1.25-4M	CABLE, 20AWG x 4, FLEXIBLE PVC	-	Montrose
6	216-102	RING TERMINAL	1	JST or Nichifu
		UNINSULATED FERRULE, L=8	3	Wago

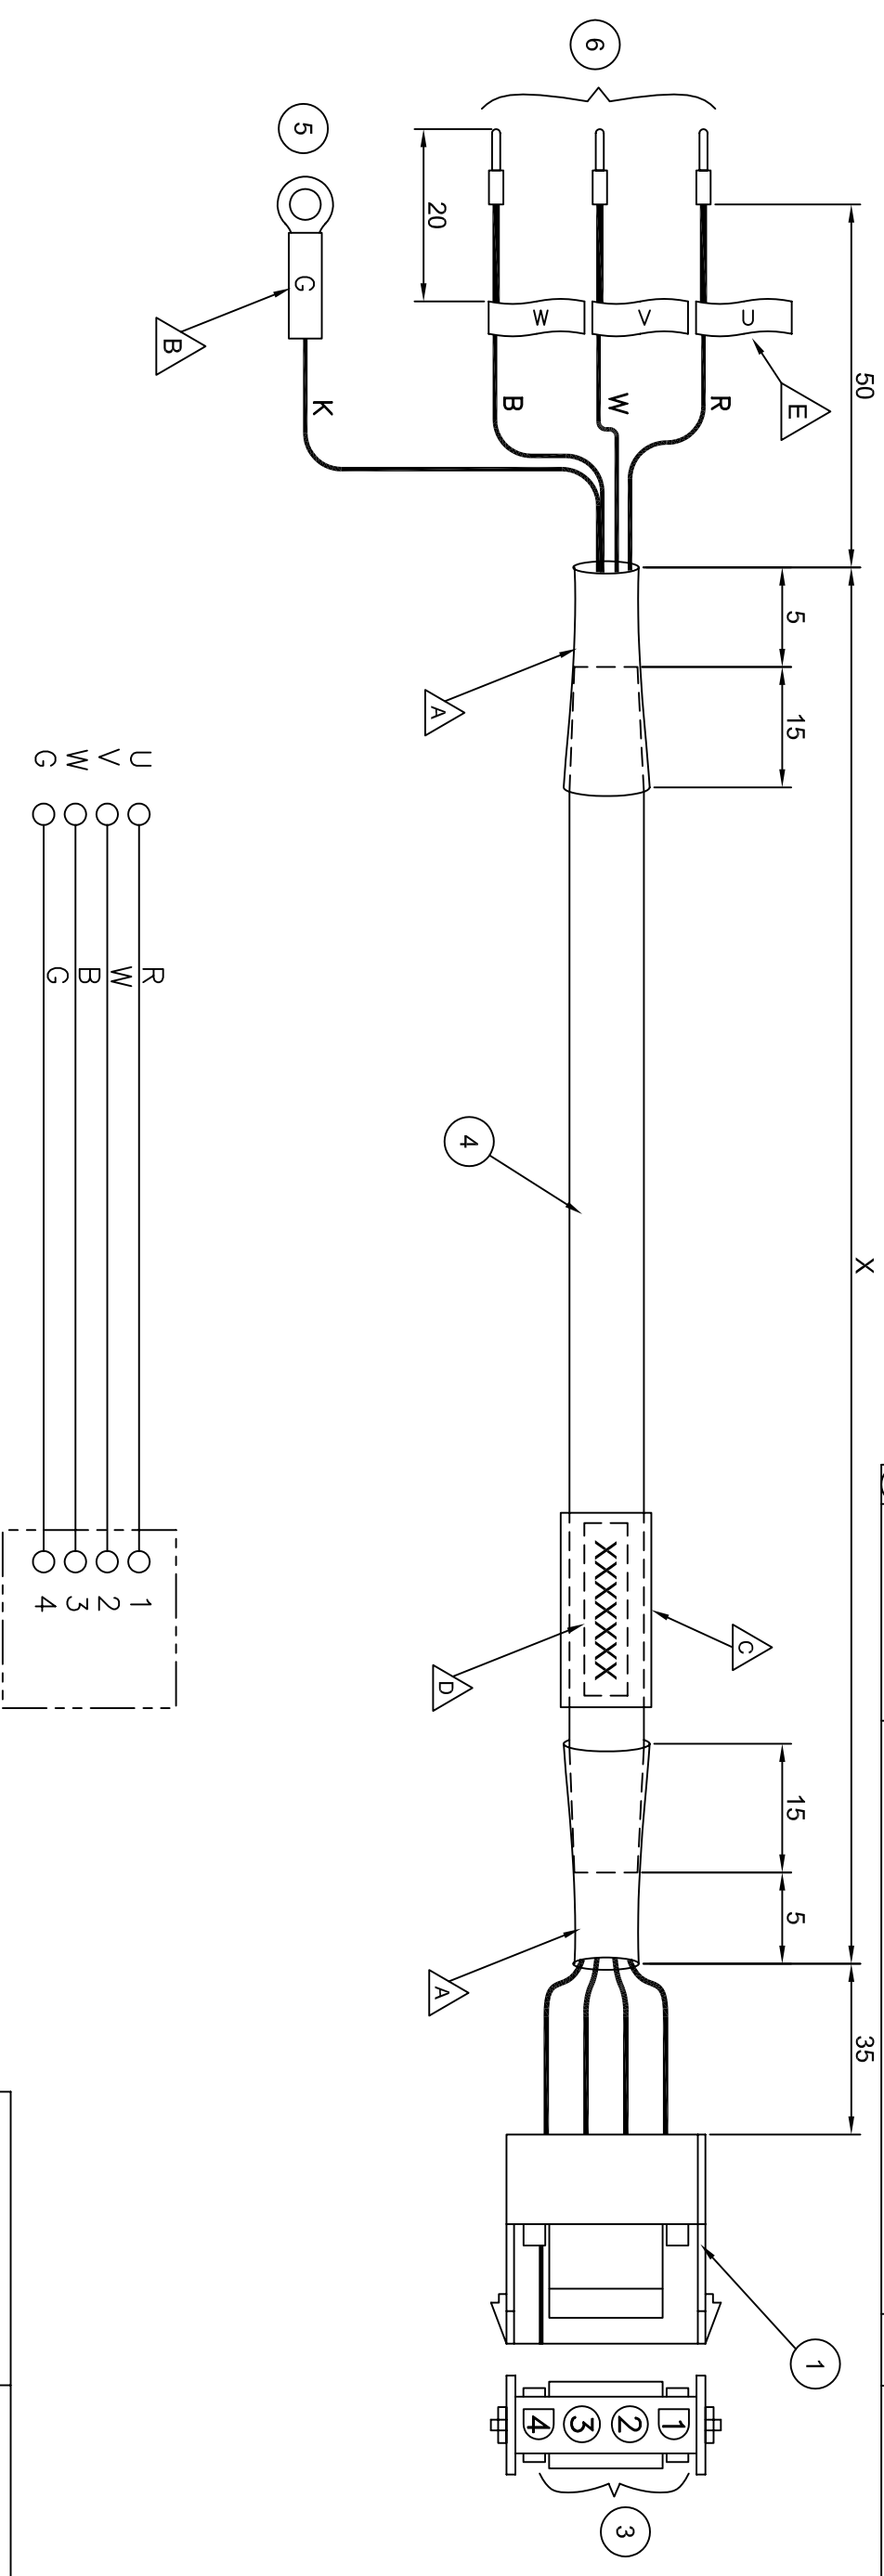

ITEM NUMBER	X = LENGTH
JZSP-CMM00-03(A)	3000
JZSP-CMM00-05(A)	5000
JZSP-CMM00-06(A)	6000
JZSP-CMM00-07(A)	7000
JZSP-CMM00-10(A)	10000
JZSP-CMM00-15(A)	15000
JZSP-CMM00-20(A)	20000

NOTES:

- A** ADD APPROPRIATE HEAT SHRINK TUBE.
- B** MARKER TUBE
- C** COVER LABEL WITH TRANSPARENT HEAT SHRINK TUBE.
- D** YASKAWA INFORMATION LABEL :
- E** MARKER FLAGGING

YASKAWA ("REV")
"ITEM NUMBER" "MM/YY"
"VENDOR CODE" "MM/YY"

CABLE SPECIFICATION (mm)	
OUTER DIAMETER	7.75
BENDING RADIUS	10 O.D.
STANDARD	UL
UL/IP CLASSIFICATION	UL94V-0
CONNECTOR SPEC	UL94V-0

7	CHANGE CABLE MANUFACTURE	7/12/06	JAlfonso (DG)	N-0502-002
6	ADDED CABLE LENGTHS (REDRAWN)	6/16/06	D.GREULOGH	N-0606-005

DESIGN: -
 DRWN: J. ALFONSO 10-5-98
 CHKD: D. BRENDLEY 10-14-98
 TECH: D. BRENDLEY 12-18-98
 APPV: M. MORAN 12-21-98

MATERIAL: SEE PART LIST ABOVE
 SPEC: SEE PART LIST ABOVE
 FINISH: N/A
 TOLERANCES/REFERENCES: UES000002

MODEL(S): SGM4H & SGM4P
 REF DWG: JZSPCM00-X (A)

THIS DOCUMENT AND INFORMATION CONTAINED HEREIN ARE CONFIDENTIAL, AND CANNOT BE COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF YASKAWA ELECTRIC AMERICA INC.

YASKAWA
Energy In Motion™

TITLE: SERVO MOTOR CABLE
 NO BRAKE, SGM4H & SGM4P
 DWG #: **UWR00278**

ITEM #: *SEE CHART