


Job Name: Contractor:

**Document: S-5358C** 

## **DIMENSIONS: GPD506/P5 BASIC DRIVE PROTECTED CHASSIS**

## S - 5358C

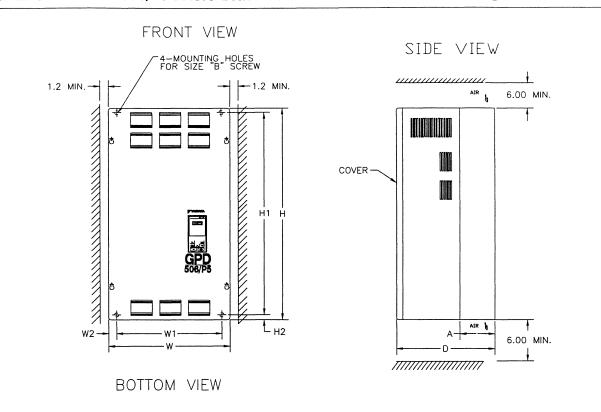

VOLTAGE	MDDEL# GPD506V-	OUTPUT CURRENT RATING (AMPS)	DIMENSIONS IN INCHES									APPROX.
			MOL H1	NTING W1	Н	W	H2	W2	Α	В	D	WEIGHT (LBS.)
230	A130	130	25.59	12.60	26.57	16.73	.49	2.07	4.13	1/4	13.78	134
	A160	160	25.59	12.60	26.57	16.73	.49	2.07	4.13	1/4	13.78	137
	A192	192	30.51	14.57	31.50	18.70	.49	2.07	5.12	3/8	13.78	176
	A248	248	30.51	14.57	31.50	18.70	.49	2.07	5.12	3/8	13.78	176
	A312	312	35.24	17.52	36.42	22.64	.59	2.56	5.12	3/8	15.75	298
460	B128	128	31.30	13.78	32.28	17.91	.49	2.07	5.12	3/8	13.78	174
	B180	180	31.30	13.78	32.28	17.91	.49	2.07	5.12	3/8	13.78	176
	B240	240	35.24	17.52	36.42	22.64	.59	2.56	5.12	3/8	14.76	298
	B302	302	35.24	17.52	36.42	22.64	.59	2.56	5.12	3/8	15.75	320

FOR REFERENCE ONLY UNLESS PROPERLY ENDORSED.



DR BY RIP 2.22.01 APPVL. SR 2-01