

C/C: GA80□	INPUT VOLTAGE 3-PHASE (VAC)	WEIGHT Kg (lb)	COOLING FANS
2169□□□	200 TO 240	39 (85.8)	2
2211□□□		40 (88.0)	2
4140□□□	380 TO 480	41 (90.2)	2
4168□□□		42 (92.4)	2

□ denotes A-Z

1	REVISED MOUNTING BKTS P2
0	INITIAL RELEASE





UNITS MM [IN]  
SCALE 1:8

DRWN.	J. MATTAS	4-8-19
CHKD.	J. PIOTROWSKI	5-6-19
TECH.	L. UDDIN	5-20-19
APRV.	J. CAIRO	6-13-19

TITLE  
GA800 DIMENSION DRAWING  
FRAME SIZE 7  
BACKSIDE TYPE 12 ENCLOSURE

SIZE	A	PAGE	1 OF 3
DWG.NO.	DD.GA80.FR7.FLNG		

REV  
1

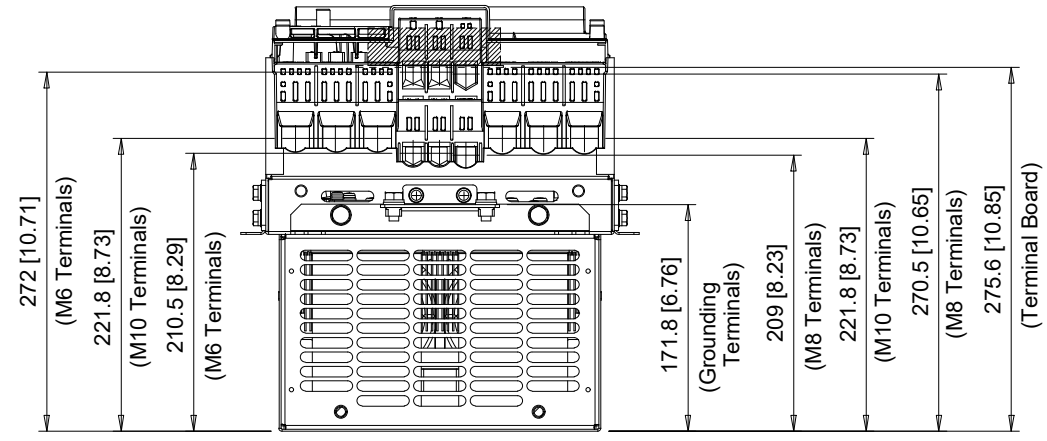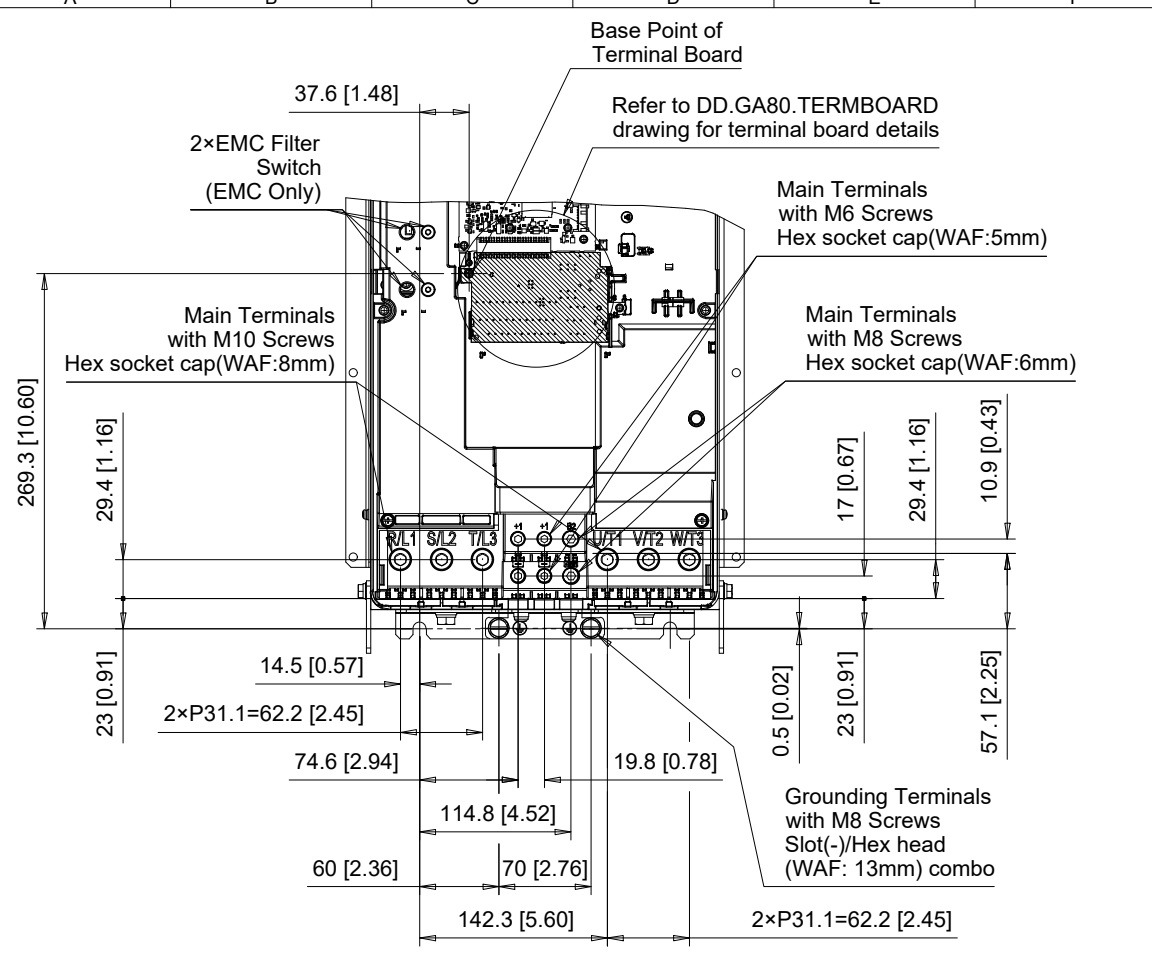

C/C:	TERMINAL SYMBOL	WIRE RANGE AWG (mm <sup>2</sup> )	TERMINAL SCREW	CLAMPING TORQUE N.m. (lb.in.)
GA80□	R/L1, S/L2, T/L3	2 - 300 (35 - 150)	M10	12 - 14 (107 - 124)
2169□□□	U/T1, V/T2, W/T3	2 - 300 (35 - 150)	M10	12 - 14 (107 - 124)
2211□□□	- , - , +1, +1	6 - 2/0 (16 - 70)*1	M6	8 - 9 (71 - 80)
4140□□□	+3/B1, B2	4 - 3/0 (25 - 95)	M8	8 - 9 (71 - 80)
4168□□□	⊕	4 - 1/0 (25 - 50)	M8	9.0 - 11 (79.7 - 97.4)

□ Denotes A-Z  
 Note: Refer to applicable codes and standards for proper wire type and size.  
 \*1 - Terminals "-" and "+1" have two screws. Wire range indicates the wire gauge per one terminal.

1	REVISED MOUNTING BKTS P2
0	INITIAL RELEASE




UNITS MM [IN]  
 SCALE 1:6

DRWN.	J. MATTAS	4-8-19
CHKD.	J. PIOTROWSKI	5-6-19
TECH.	L. UDDIN	5-20-19
APRV.	J. CAIRO	6-13-19

TITLE  
 GA800 DIMENSION DRAWING  
 FRAME SIZE 7  
 BACKSIDE TYPE 12 ENCLOSURE

SIZE	A	PAGE	2 OF 3
DWG.NO.	DD.GA80.FR7.FLNG		

Panel Cutout

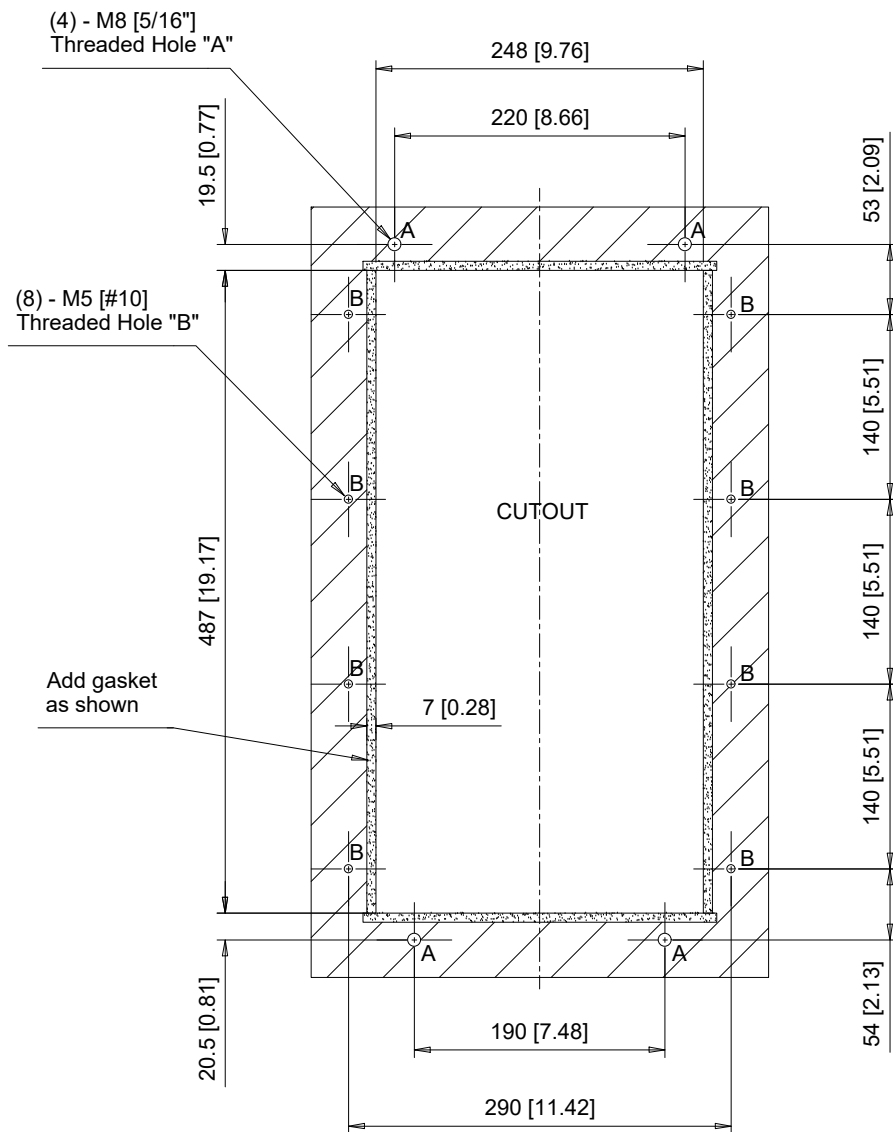

Notes:

Exposed heatsink minimum clearance D = 154 [6.06].  
Refer to Type 12 heatsink external installation manual for additional details.

1	REVISED MOUNTING BKTS P2
0	INITIAL RELEASE



	UNITS MM [IN]
SCALE 1:6	

DRWN.	J. MATTAS	4-8-19
CHKD.	J. PIOTROWSKI	5-6-19
TECH.	L. UDDIN	5-20-19
APRV.	J. CAIRO	6-13-19

TITLE	GA800 DIMENSION DRAWING FRAME SIZE 7 BACKSIDE TYPE 12 ENCLOSURE
-------	---

SIZE	A	PAGE	3 OF 3
DWG.NO.	DD.GA80.FR7.FLNG		

REV	1
-----	---