
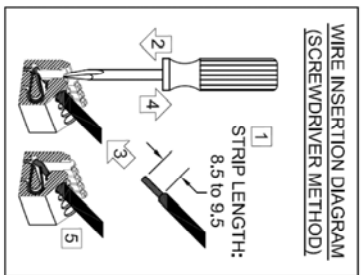


- NOTES:
- 1) TERMINAL BLOCK WIRE STRIP LENGTH = 8.5 TO 9.5mm
 - 2) TERMINAL BLOCK WIRE SIZE = #16AWG - #24AWG SOLID OR STRANDED.
 - 3) SOLID WIRES AND WIRES WITH FERRULES CAN BE INSERTED DIRECTLY INTO THE TERMINALS WITHOUT THE NEED TO ACTIVATE THE TERMINAL BUTTON.
 - 4) FOR STRANDED WIRES THE TERMINAL BUTTON MUST BE ACTIVATED WITH A 1/8" WIDE FLAT BLADE SCREWDRIVER OR WITH A WAGO OPERATING TOOL (210-719, 210-720, OR 250-657).
 - 5) TERMINAL BLOCK MOUNTS TO DIN 35 RAIL.
 - 6) TERMINAL BUTTON ACTUATION FORCE = BETWEEN 3 lbf AND 8 lbf FOR THE SPRING TO BE FULLY ACTIVATED.
- WARNING - DAMAGE MAY OCCUR IF MORE THAN 40 lbf IS APPLIED TO THE TERMINAL BUTTON.**

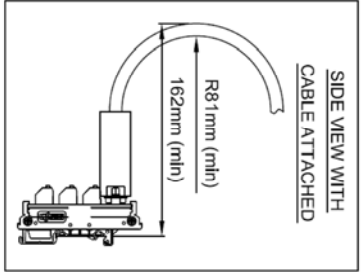

REV	DESCRIPTION	DATE	DRAWN BY
0	Initial Release	4/17/19	E. SONDERMAN

THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE PUBLIC AND CAN BE DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT OF YASKAWA AMERICA INC. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR ONGOING PRODUCT MODIFICATIONS AND IMPROVEMENTS.

SCALE: NTS/ UNITS: mm SHEET: 1/1

YASKAWA

TITLE: 60372499 Terminal Block

ITEM #: 60372499

DRAWING #:	SIZE	REVISION	PAGE
CAD-60372499		0	1 of 1